


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: `www*lin 1.0 exp setrgbcolor`




Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: `www*lin 1.0 exp setrgbcolor`

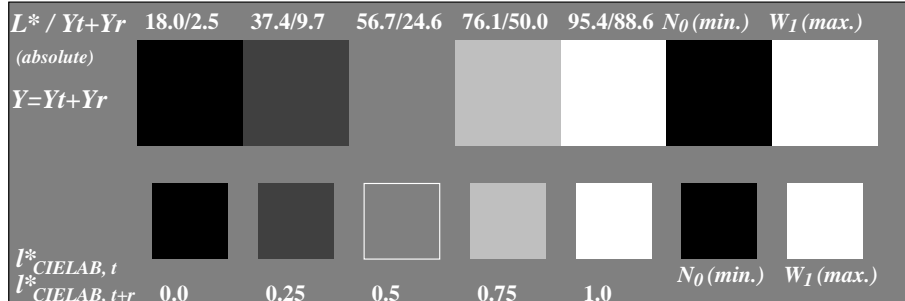


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www*lin 1.0 exp setrgbcolor`; use file `www.bam.de/KE89/10C/C89E00SA.PS` or `/C89E00SP.PS/.PDF` for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3C according to ISO/IEC 15775 and input: `www*lin 1.0 exp setrgbcolor`
DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*

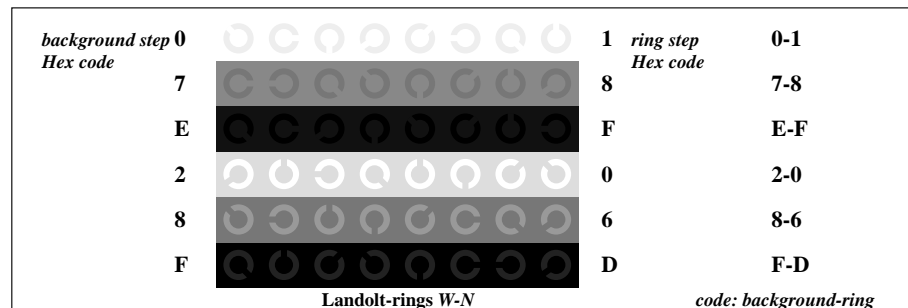

Picture C4: Landolt-rings W-N; PS operator: `www*lin 1.0 exp setrgbcolor`

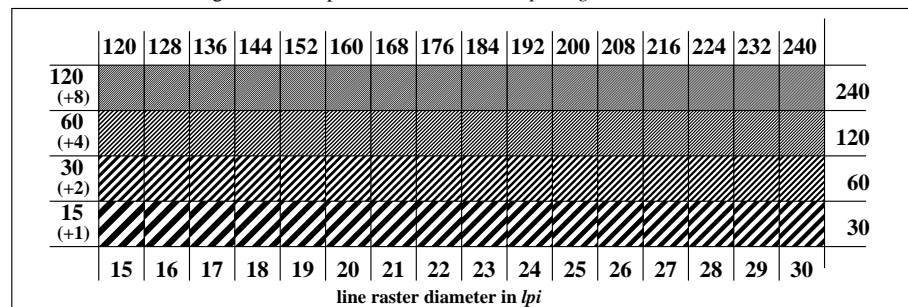

Picture C5: Line raster under 45° (or 135°); PS operator: `www*lin 1.0 exp setrgbcolor`

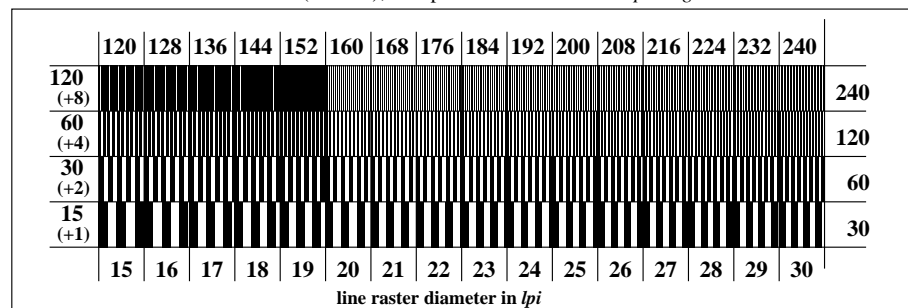

Picture C6: Line raster under 90° (or 0°); PS operator: `www*lin 1.0 exp setrgbcolor`