





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: [www*lin 1.0 exp setrgbcolor](http://www.lin.1.0.exp.setrgbcolor)

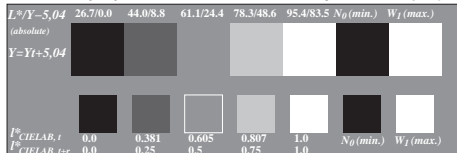


Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: www*lin 1.0 exp setrgbcolor




Picture C3: 16 visual equidistant L^* -gray steps; PS operator: www*lin 1.0 exp setrgbcolor; use file www.bam.de/KE89/10C/C89E00F1.PS/ or www.bam.de/KE89/10C/C89E00F1.PDF for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3C according to
ISO/IEC 15775 and input: www*lin 1.0 exp setrgbcolor
DIS ISO/IEC 19839-X; output: [cmY0*/000n* setcmYkcolor](http://www*lin 1.0 exp setrgbcolor)

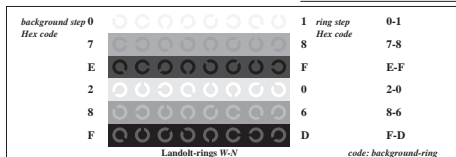

Picture C4: Landolt-rings W-N; PS operator: www*lin 1.0 exp setrgbcolor

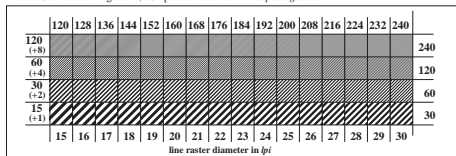

Picture C5: Line raster under 45° (or 135°); PS operator: www*lin 1.0 exp setrgbcolor

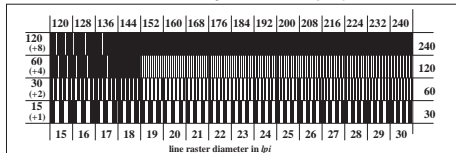

Picture C6: Line raster under 90° (or 0°); PS operator: www*lin 1.0 exp setrgbcolor