


See for similar files: <http://www.ps.bam.de/LE18/10S/S18E01FP.PS/.PDF>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=0,1; iTLS; oTLS, CIELAB

used coordinate
surround center
*LAB*_{TLS00} c000**
C
*LAB*_{TLS00} 1my0**
*LAB*_{TLS00} 0m00**
M
*LAB*_{TLS00} c1y0**
*LAB*_{TLS00} 00y0**
Y
*LAB*_{TLS00} cm10**
*LAB*_{TLS00} 0my0**
O
*LAB*_{TLS00} c110**
*LAB*_{TLS00} c0y0**
L
*LAB*_{TLS00} 1m10**
*LAB*_{TLS00} cm00**
V
*LAB*_{TLS00} 11y0**
*LAB*_{TLS00} cmy0**
N/W
*LAB*_{TLS00} 000k**

BAM registration: 20030101-LE18/10S/S18E01FP.PS/.PDF
application for measurement of monitor (Yr=2.5) and printer output
BAM material: code=rha4ta

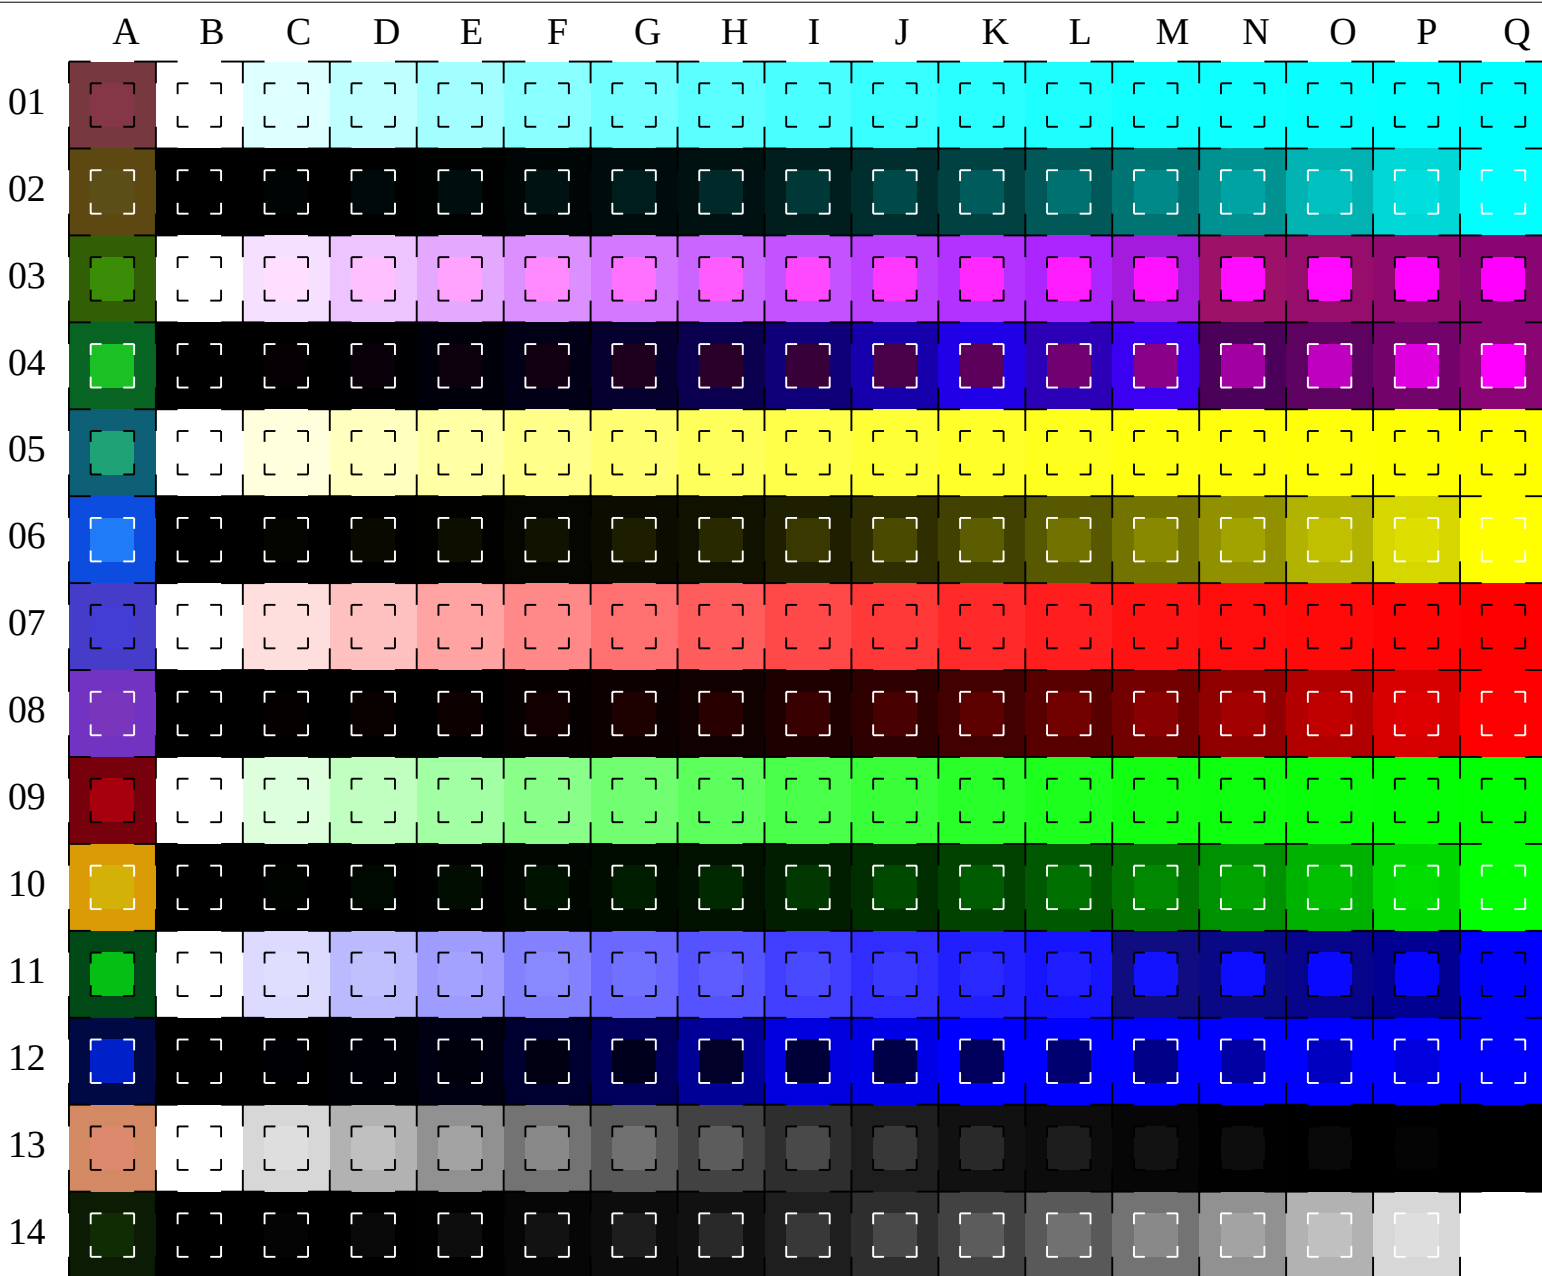

16 equidistant CIELAB steps: C-W, C-N, M-W, M-N, Y-W, Y-N, O-W, O-N, L-W, L-N, V-W, V-N, N-W, W-N and 14 CIE-test colours (left)

Test chart LE18: 16 CIELAB steps of ISO/IEC 15775 input ,TLS00,ORS18: *LAB* setcolor (2x)*
Chromatic-White, Chromatic-Black, Black-White output ,TLS00: *olv* setrgbcolor / w* setgray*