


www.ps.bam.de/LE26/10Q/Q26E00FP.PS/.PDF; linearized output
F: Output Linearization (OL) data LE26/10Q/Q26E00FP.DAT in File (F)

See for similar files: <http://www.ps.bam.de/LE26/10Q/Q26E00FP.PS/.PDF>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20040801-LE26/10Q/Q26E00FP.PS/.PDF
application for measurement of printer systems
BAM material: code=rha4ta

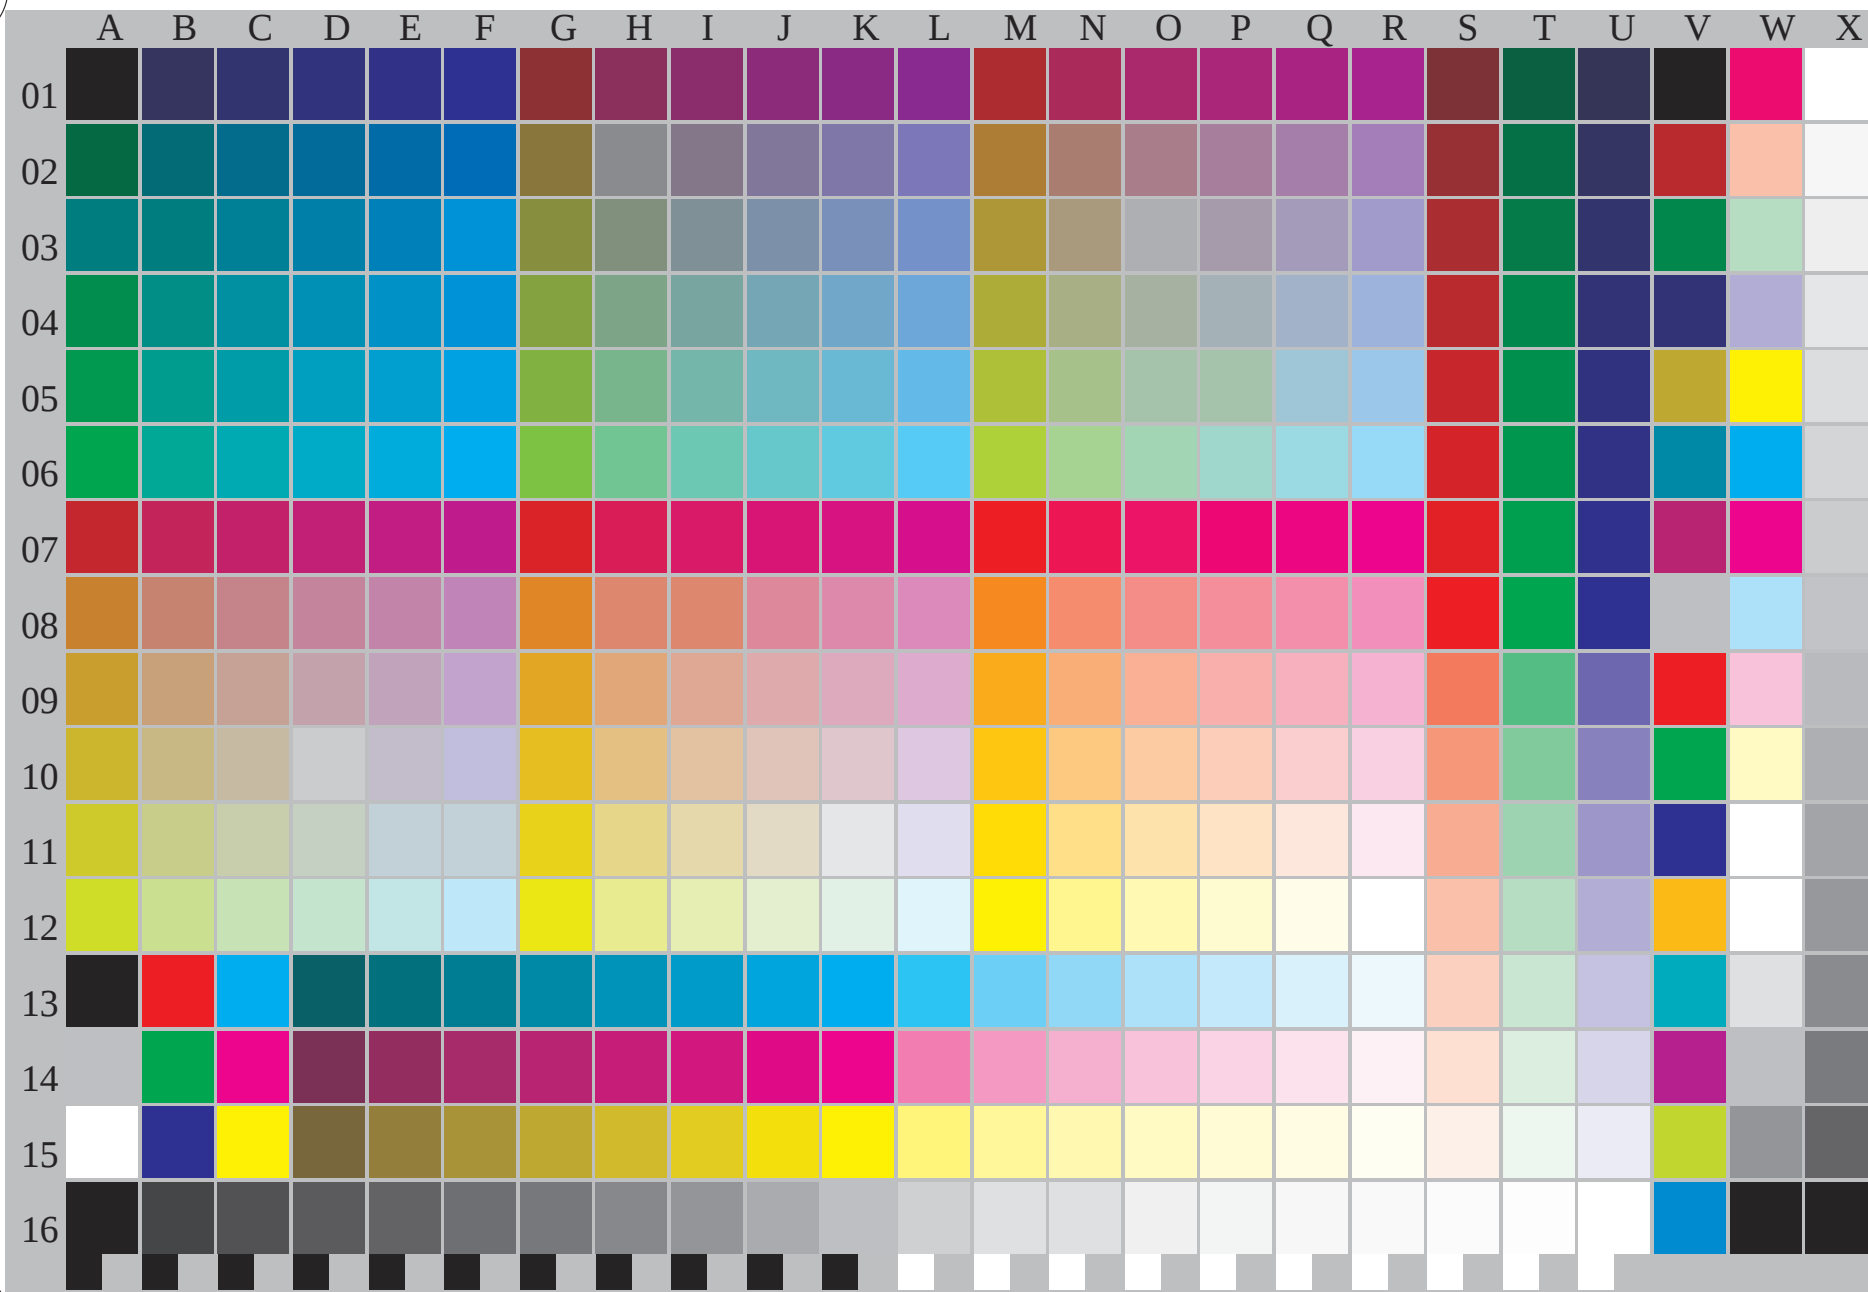

Test chart file with 363 colours and digital equidistant 5 and 16 step grey scale; see IEC 61966-7-1:1999 and ISO/IEC 15775:1999; cmy0 colour coordinates

BAM-test chart LE26:
384 colours of IEC 61966-7-1:1999 und ISO/IEC 15775:1999 output: $cmy0^* / 000n^* setcmykcolor$

input: $cmy0 setcmykcolor$