


www.ps.bam.de/LE26/L26E00F1.PS/.TXT; linearized output

F: Output Linearization (OL) data LE26/L26E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/LE26/LE26.HTM>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=0.0; IORS; oORS, CIELAB

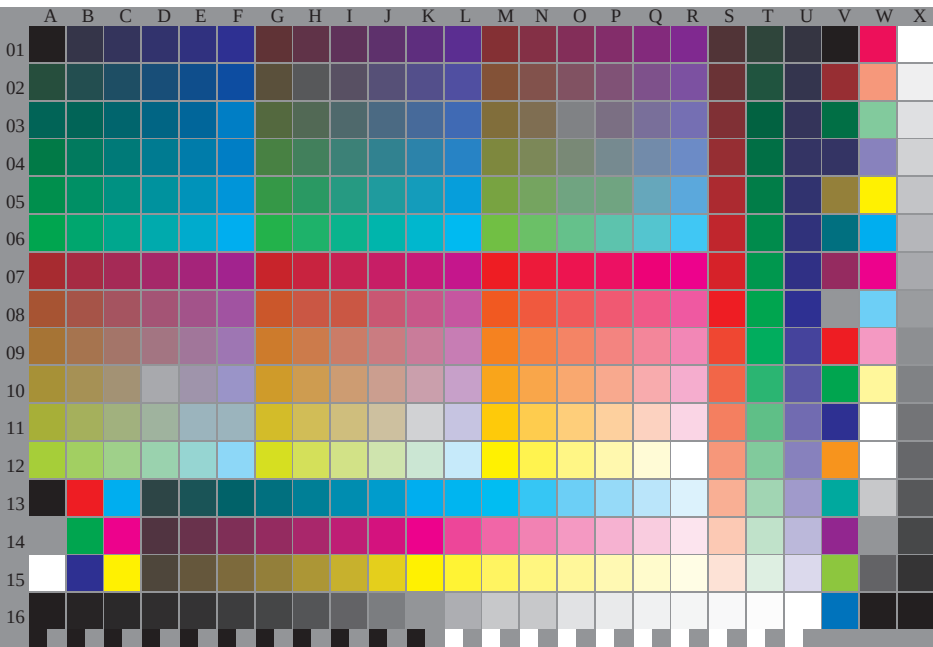

Test chart file with 363 colours and digital equidistant 5 and 16 step grey scale; see IEC 61966-7-1:1999 and ISO/IEC 15775:1999; cmy0 colour coordinates

BAM-test chart LE26:

384 colours of IEC 61966-7-1:1999 und ISO/IEC 15775:1999 output:  $cmy0^* / 000n^* \text{ setcmykcolor}$

input:  $cmy0 \text{ setcmykcolor}$

BAM registration: 20040801-LE26/L26E00F1.PS/.TXT  
application for measurement of printer systems

BAM material: code=thata