


( $olv3^* = 0.0, l3^*, v3^*$ )

( $olv3^* = 0.0, 0, 1$ )

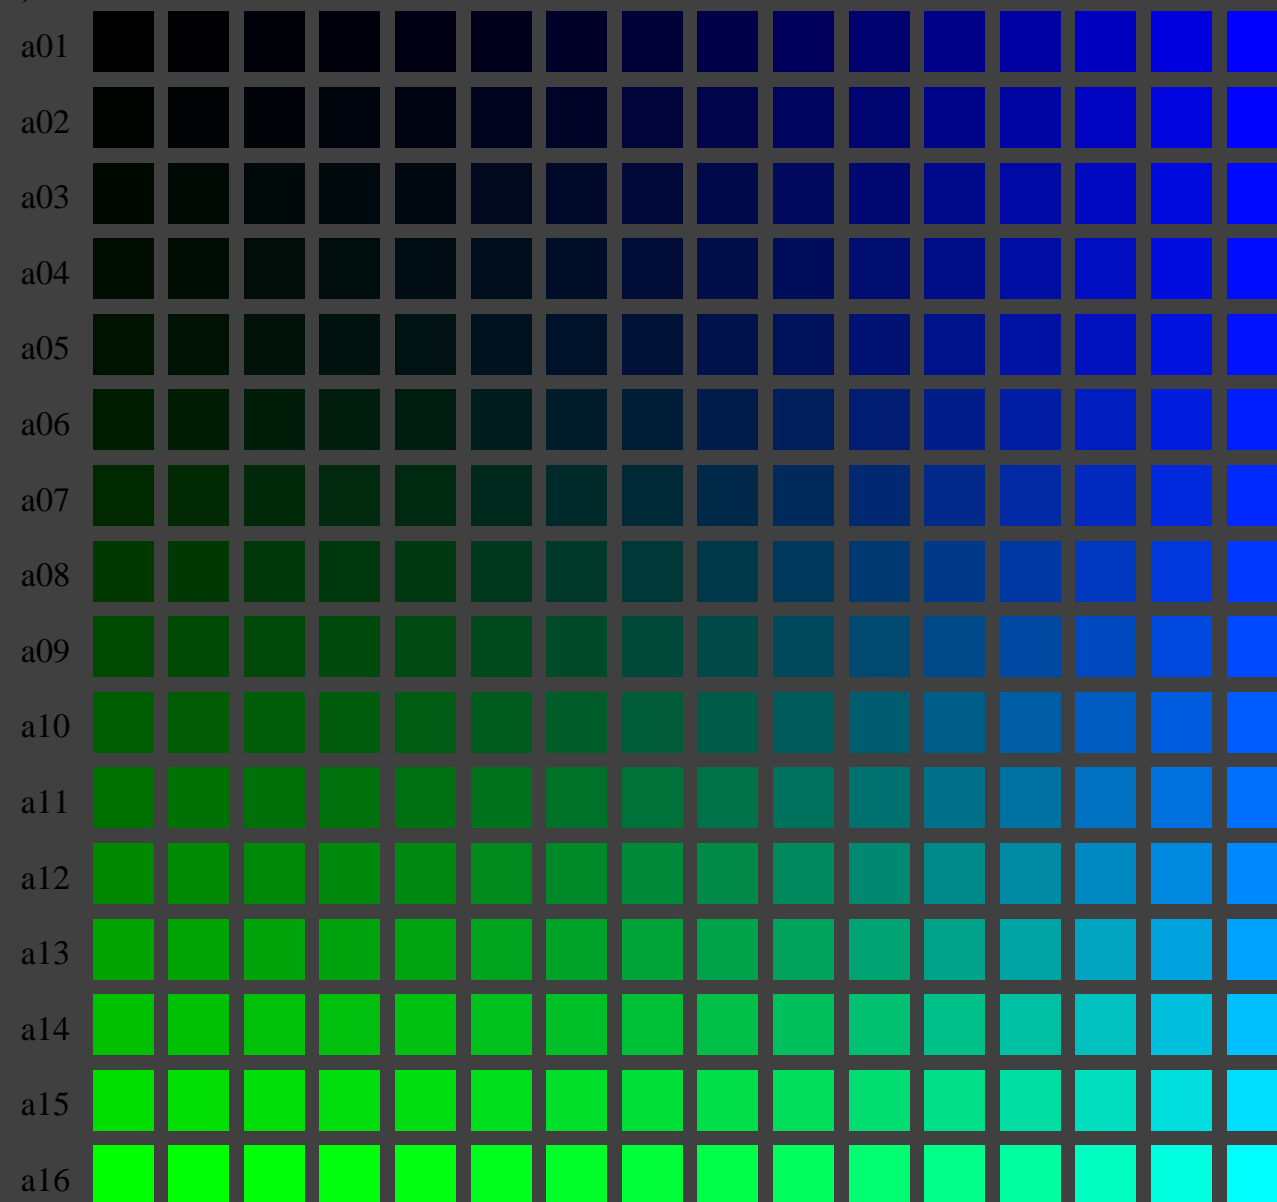

( $olv3^* = 0.0, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.0 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  setrgbcolor  
output:  $olv^*$  setrgbcolor /  $w^*$  setgray

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E00FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 1/16, Serie: 1/1, Page: 1 Page count: 1

( $olv3^* = 0.066, l3^*, v3^*$ )

( $olv3^* = 0.066, 0, 1$ )

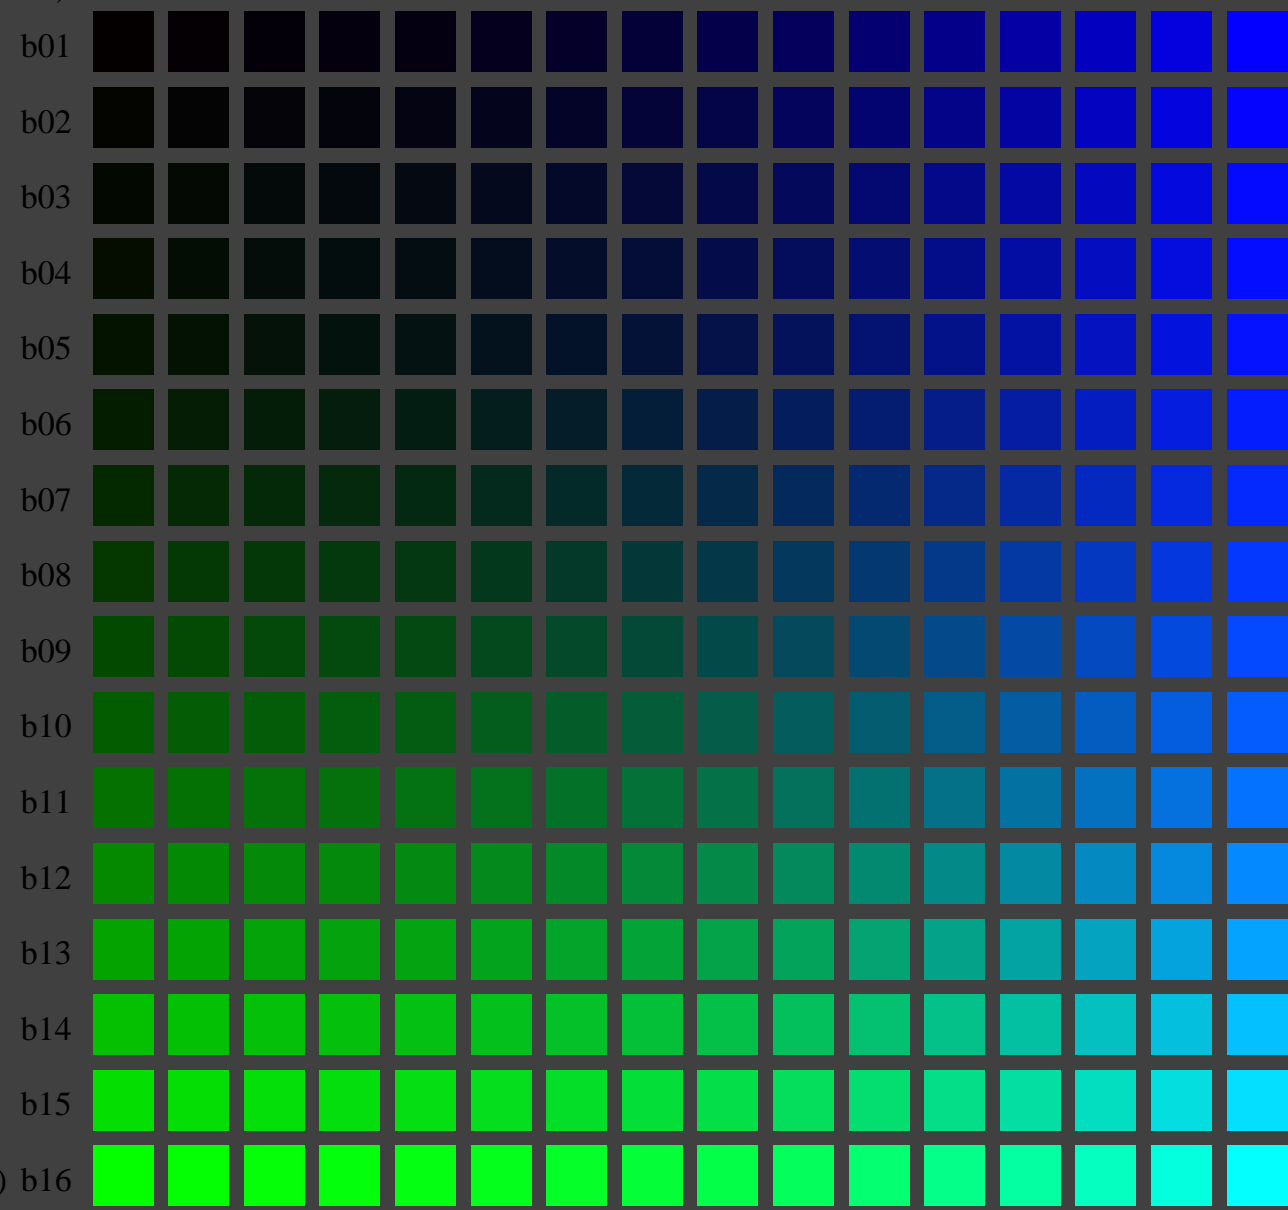

( $olv3^* = 0.066, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.066 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$


See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>  
Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E01FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 2/16, Serie: 1/1, Page: 2 Page count: 2

( $olv3^* = 0.133, l3^*, v3^*$ )

( $olv3^* = 0.133, 0, 1$ )

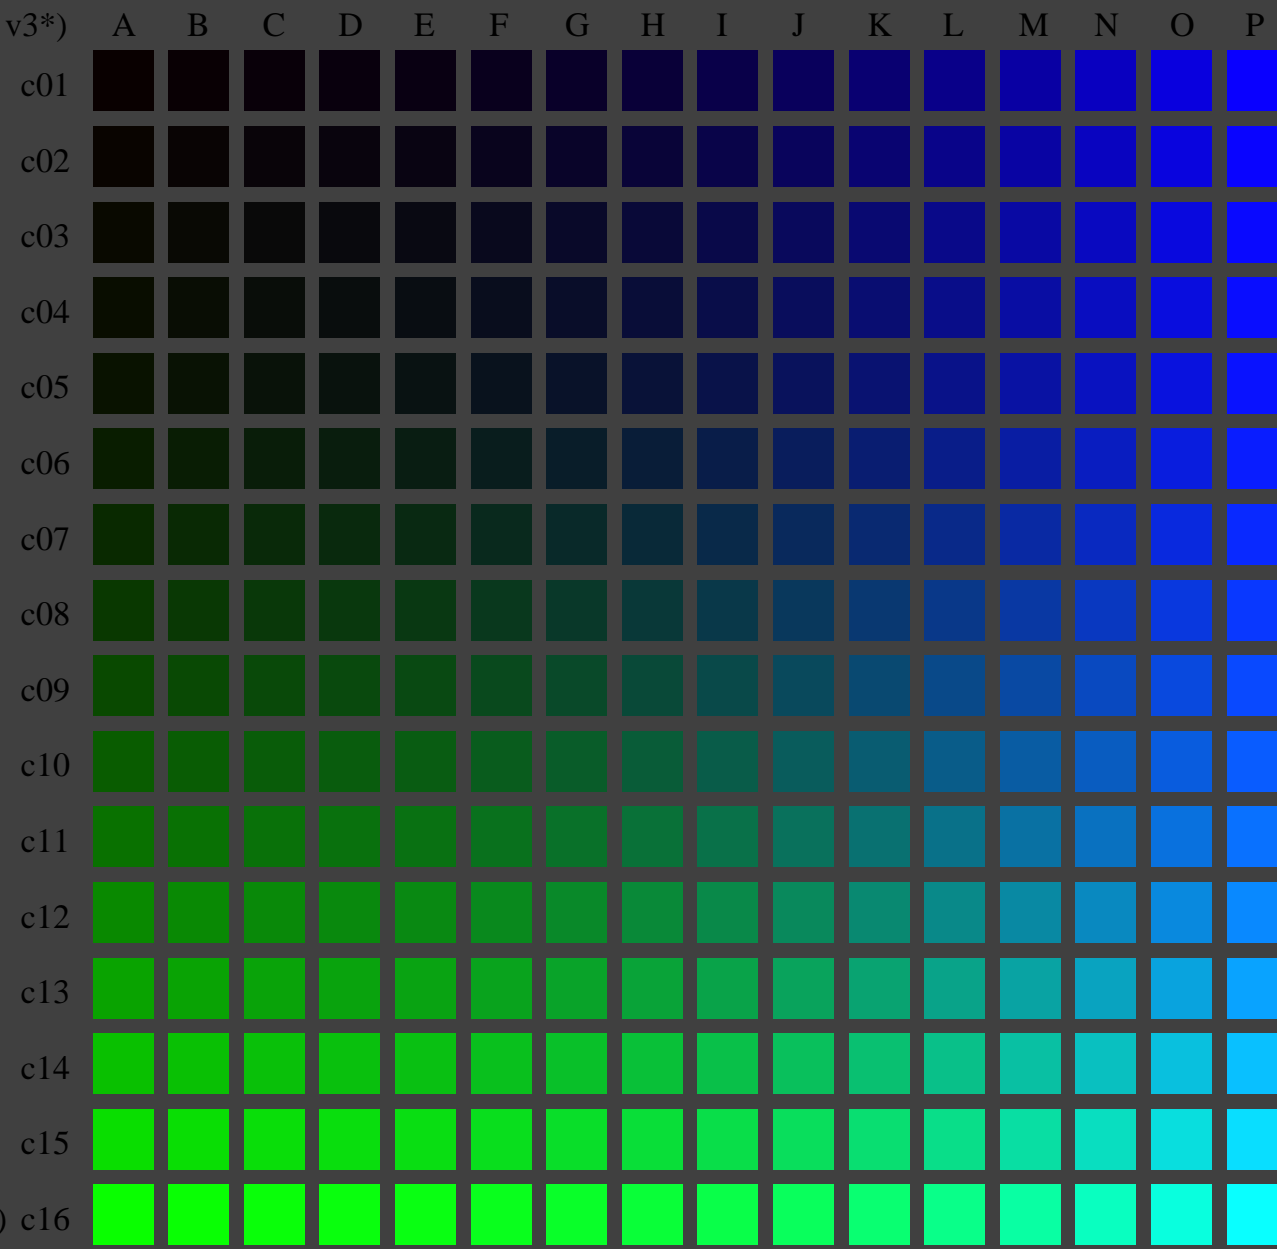

( $olv3^* = 0.133, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.133 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E02FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 3/16, Serie: 1/1, Page: 3, Page count: 3

( $olv3^* = 0.2, l3^*, v3^*$ )

( $olv3^* = 0.2, 0, 1$ )

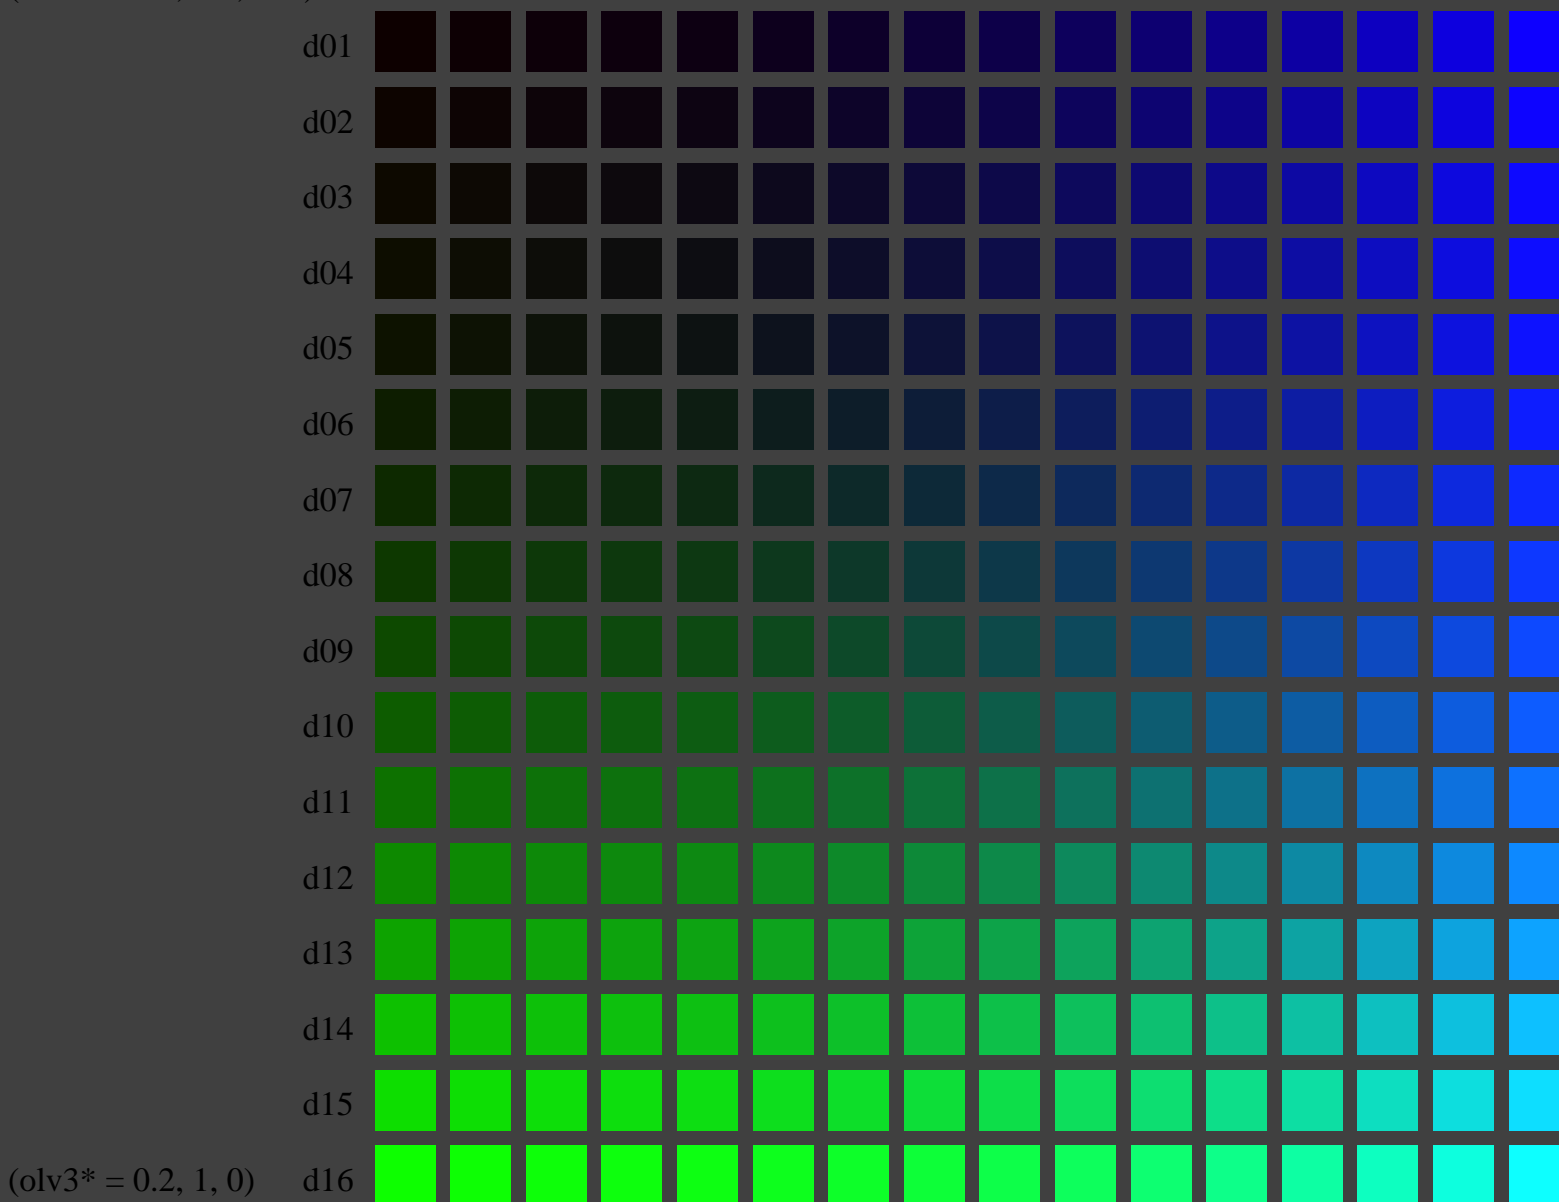

( $olv3^* = 0.2, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.2 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  setrgbcolor  
output:  $olv^*$  setrgbcolor /  $w^*$  setgray

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E03FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 4/16, Serie: 1/1, Page: 4 Page count: 4

( $olv3^* = 0.266, l3^*, v3^*$ )

( $olv3^* = 0.266, 0, 1$ )

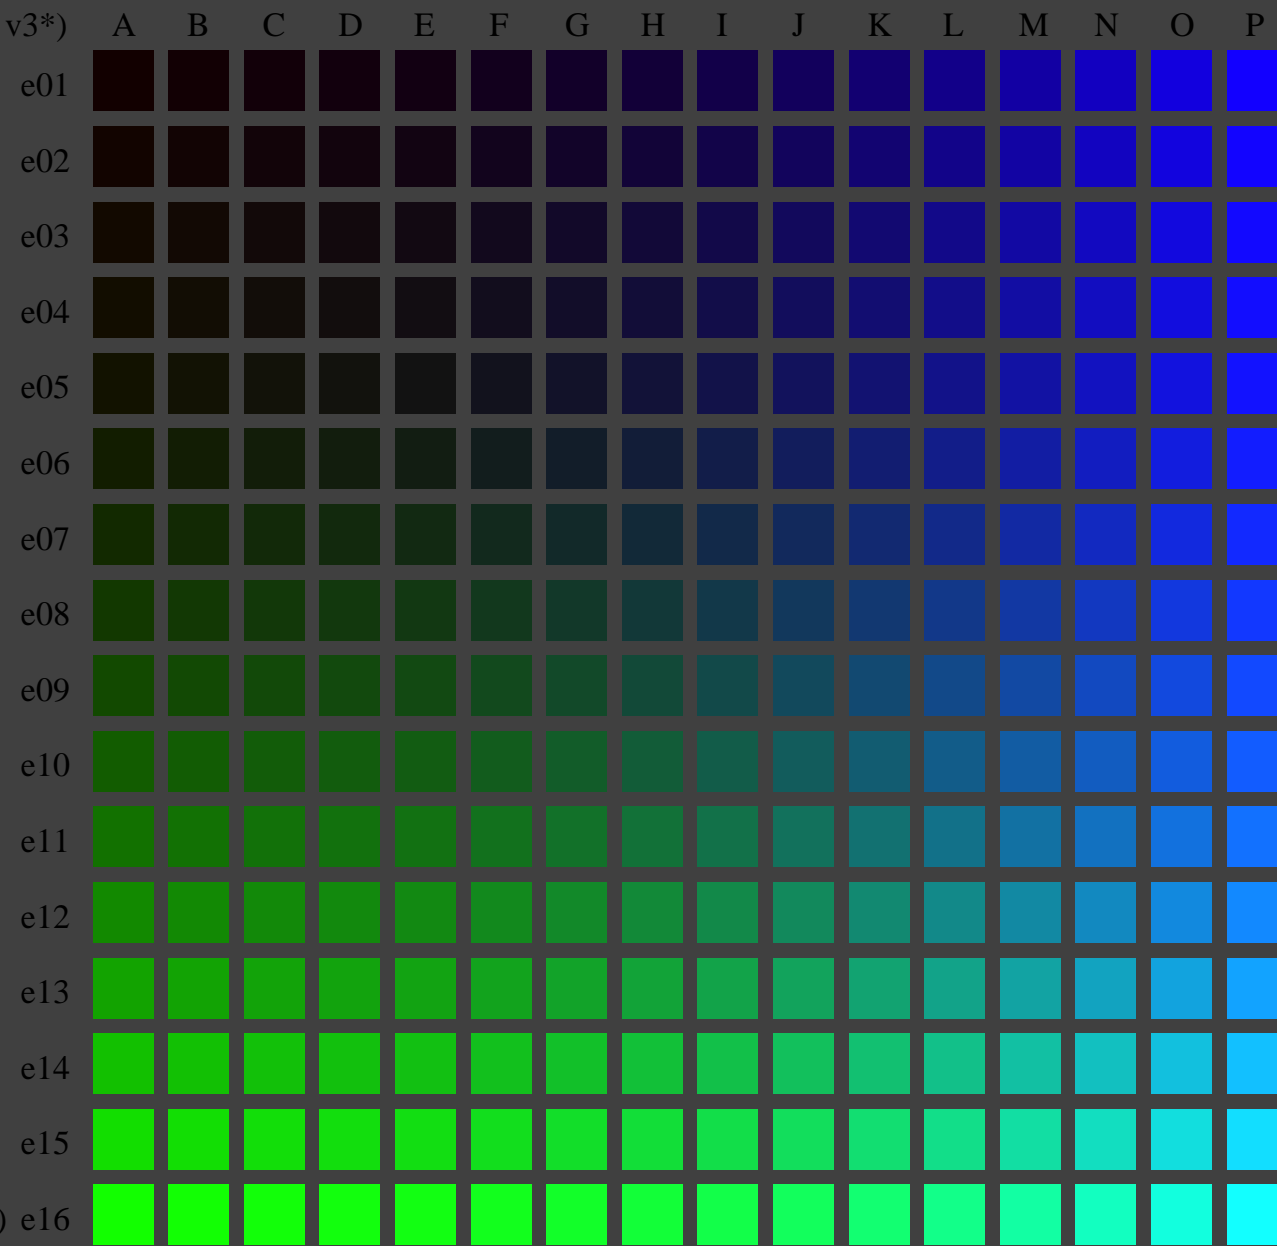

( $olv3^* = 0.266, 1, 0$ )

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>

Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E04FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 5/16, Serie: 1/1, Page: 5 Page count: 5

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.266 = \text{const.}$


BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  setrgbcolor  
output:  $olv^*$  setrgbcolor /  $w^*$  setgray



( $olv3^* = 0.333, l3^*, v3^*$ )

( $olv3^* = 0.333, 0, 1$ )

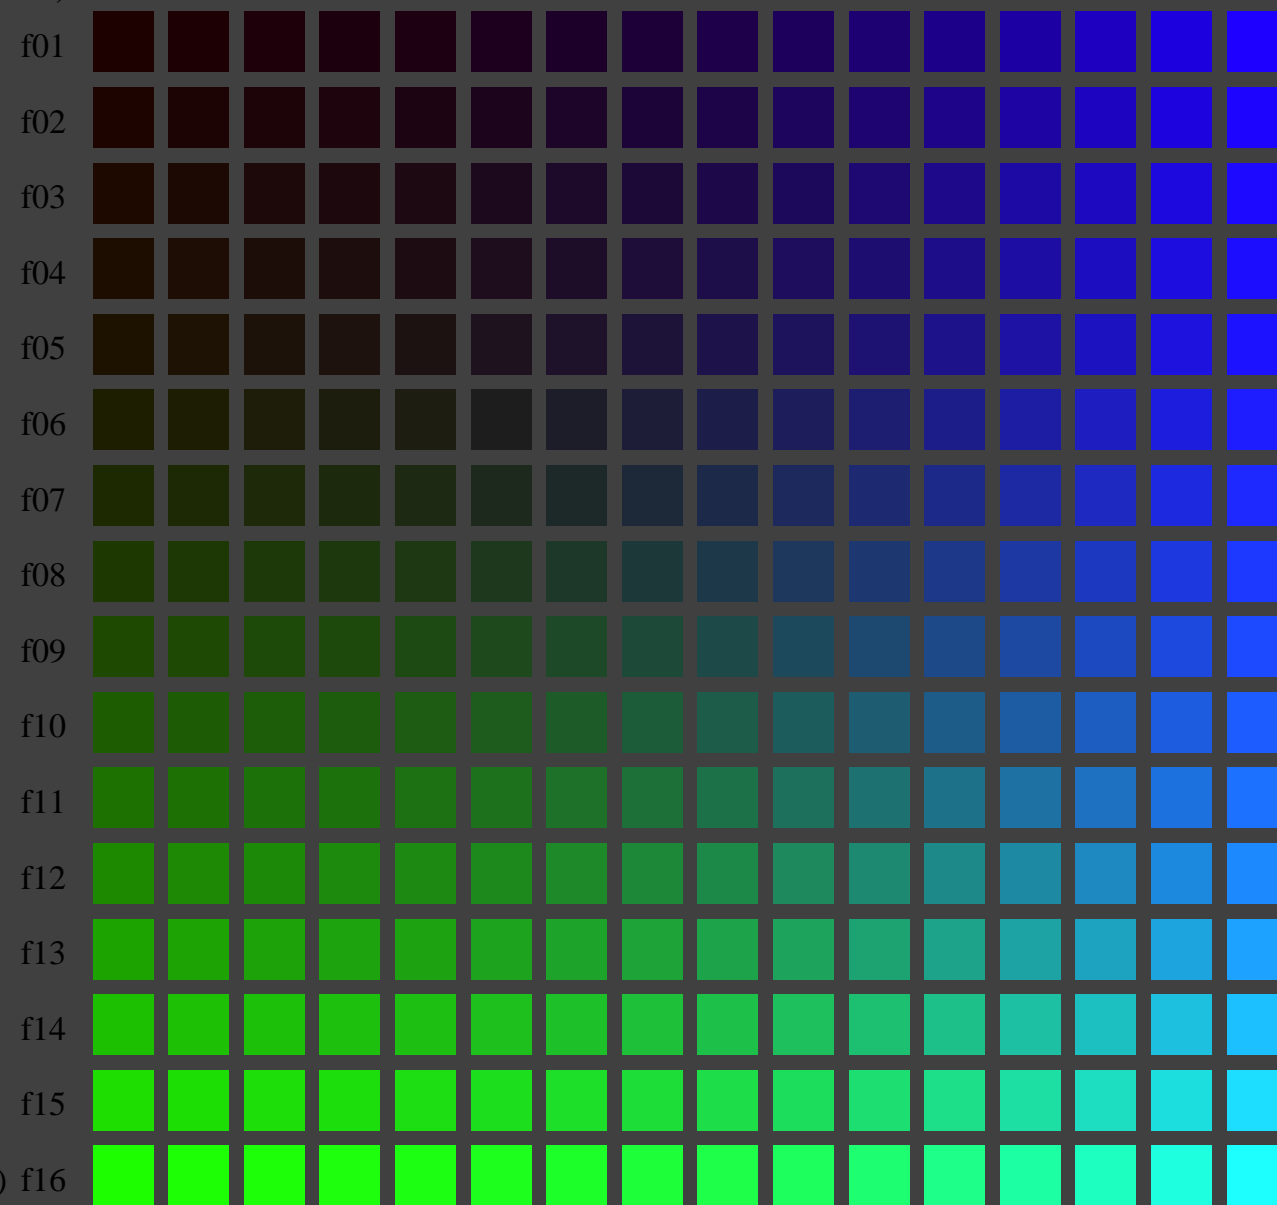

( $olv3^* = 0.333, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.333 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$


See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>

Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E05FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 6/16, Serie: 1/1, Page: 6 Page count: 6

( $olv3^* = 0.4, l3^*, v3^*$ )

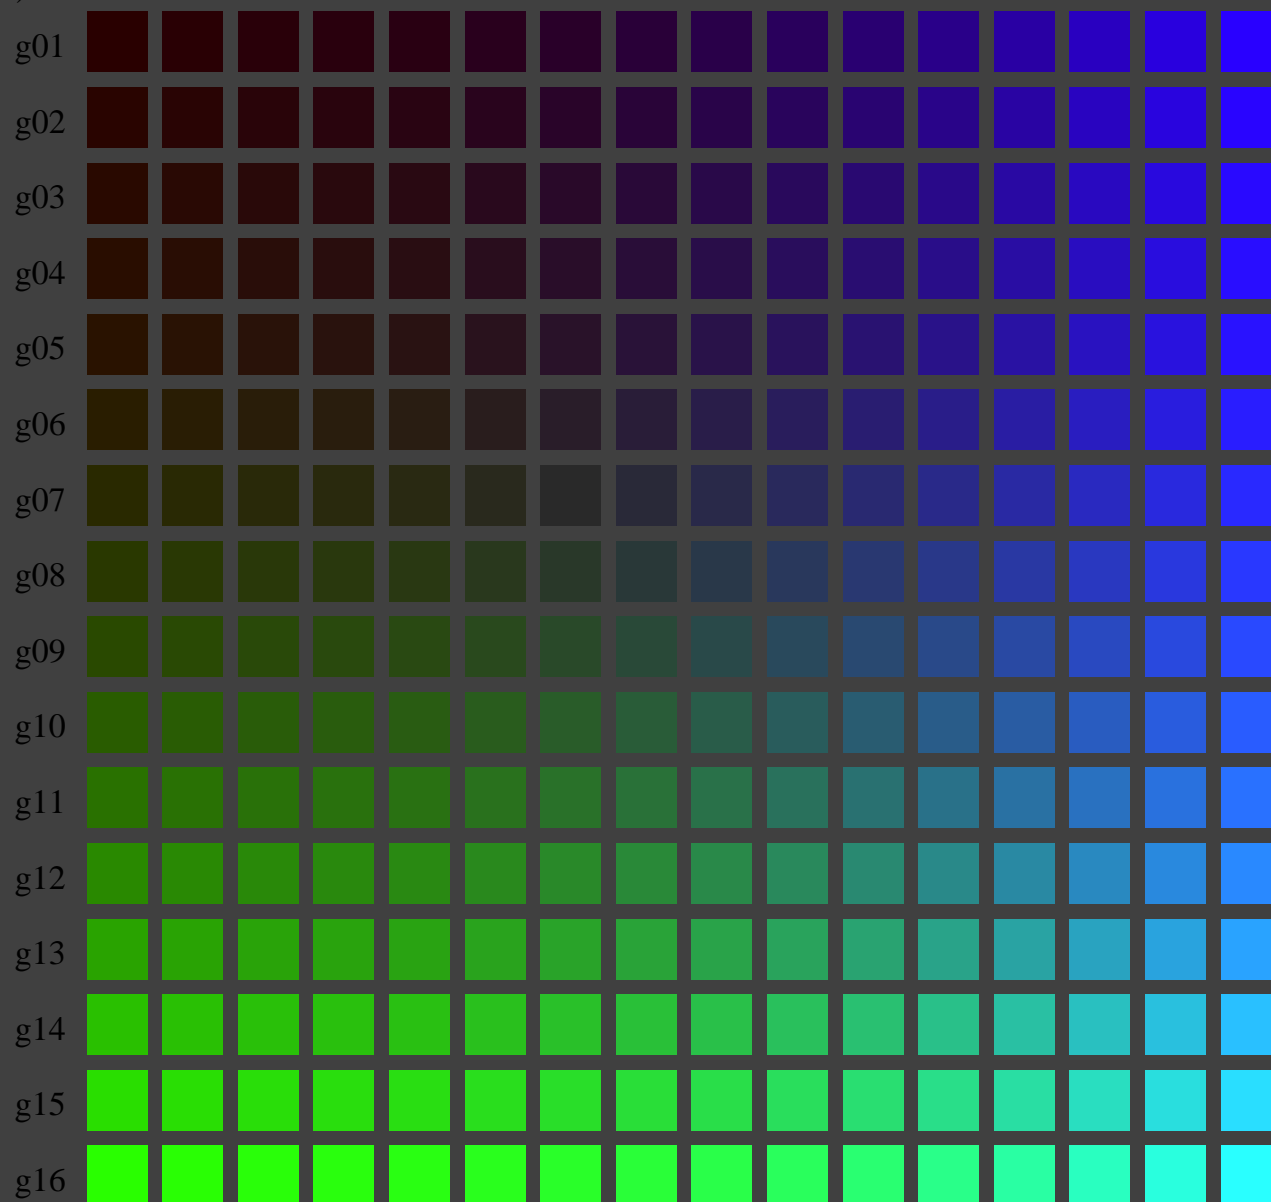

( $olv3^* = 0.4, 0, 1$ )

( $olv3^* = 0.4, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.4 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  setrgbcolor  
output:  $olv^*$  setrgbcolor /  $w^*$  setgray

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E06FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 7/16, Serie: 1/1, Page: 7, Page count: 7

( $olv3^* = 0.466, l3^*, v3^*$ )

( $olv3^* = 0.466, 0, 1$ )

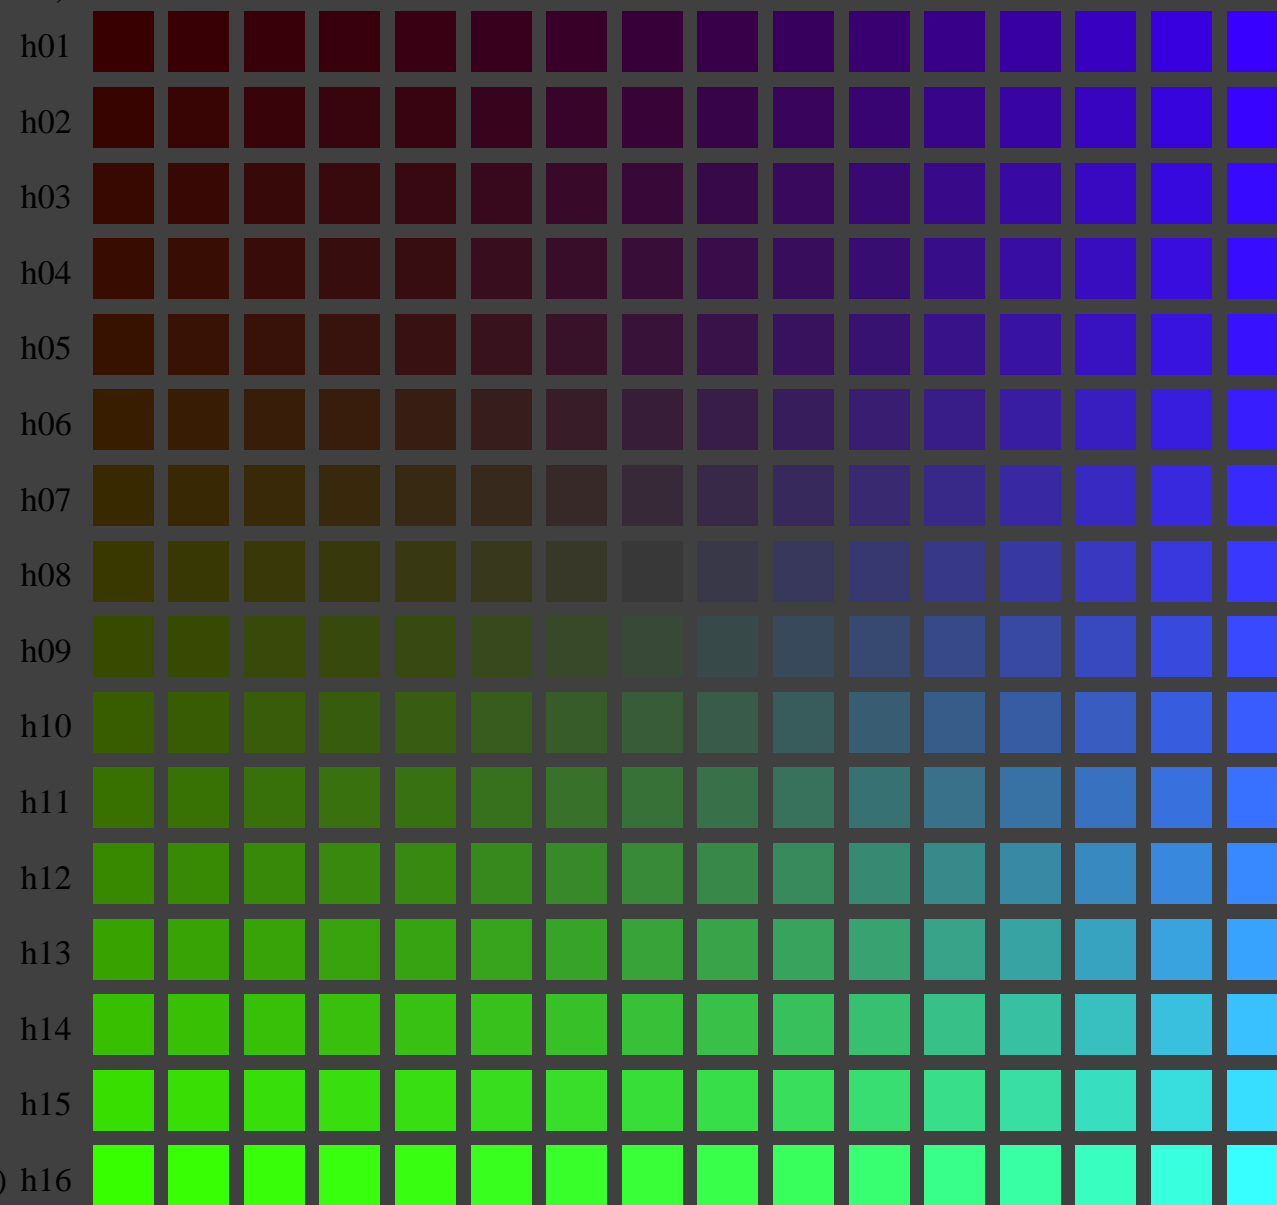

( $olv3^* = 0.466, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.466 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>

Version 2.1, io=1,1; iORS; oORS, CIELAB


BAM registration: 20050501-LE33/10S/S33E07FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 8/16, Serie: 1/1, Page: 8 Page count: 8



( $olv3^* = 0.533, l3^*, v3^*$ )

( $olv3^* = 0.533, 0, 1$ )

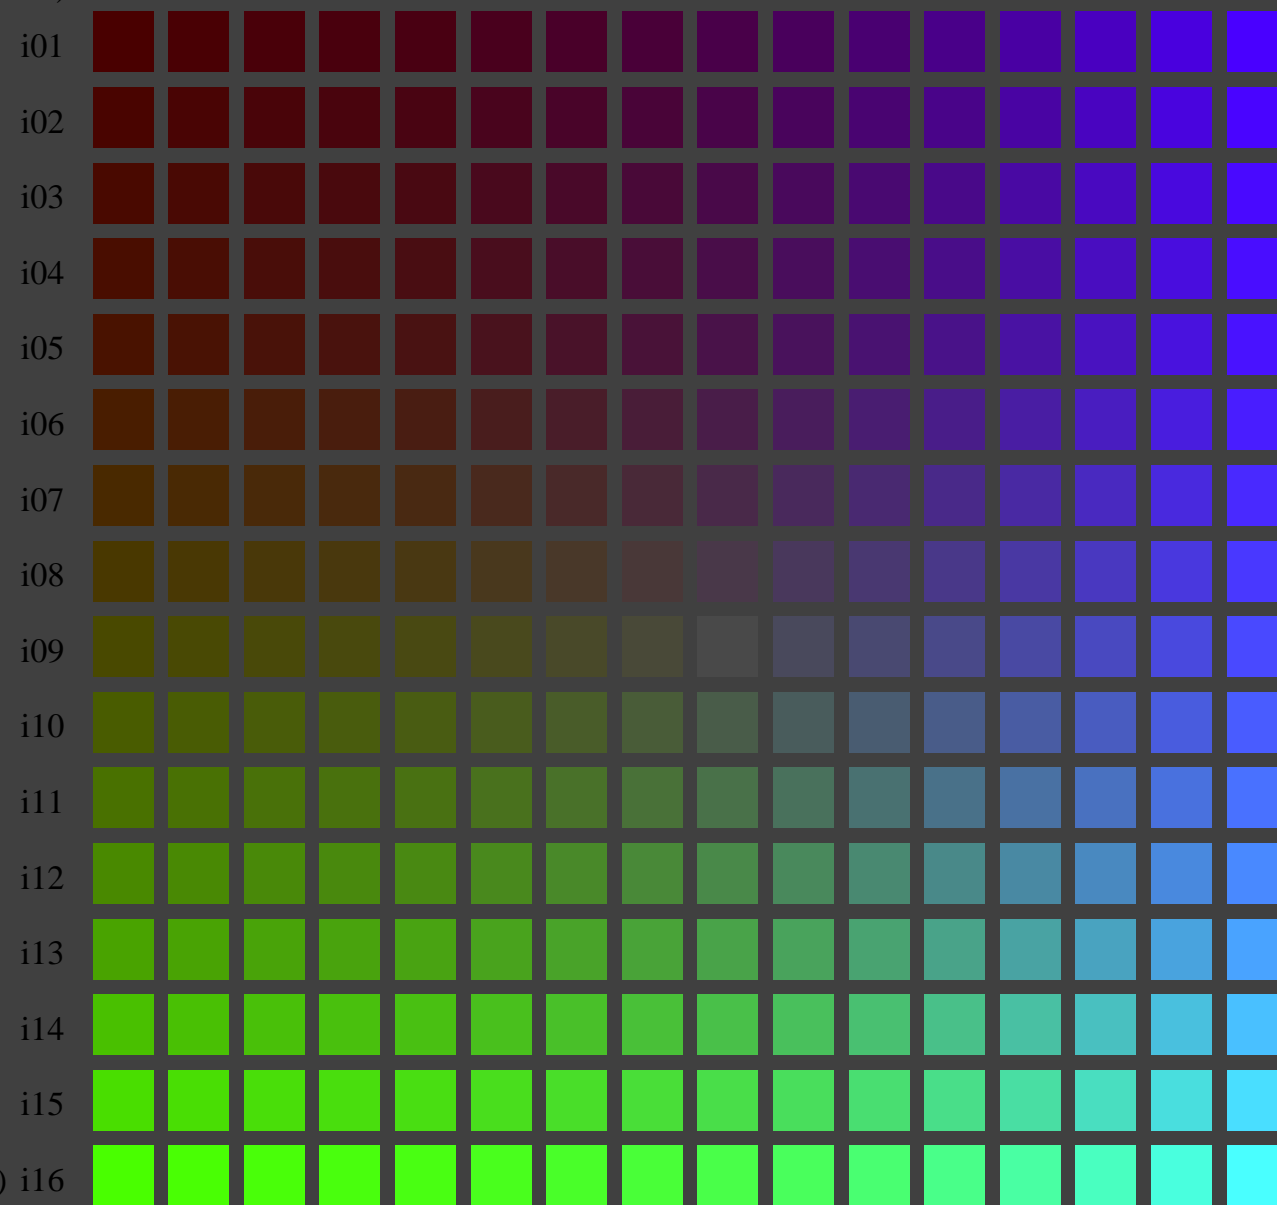

( $olv3^* = 0.533, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.533 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1,  $io=1, 1$ ; IORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E08FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 9/16, Serie: 1/1, Page: 9 Page count: 9

( $olv3^* = 0.6, l3^*, v3^*$ )

( $olv3^* = 0.6, 0, 1$ )

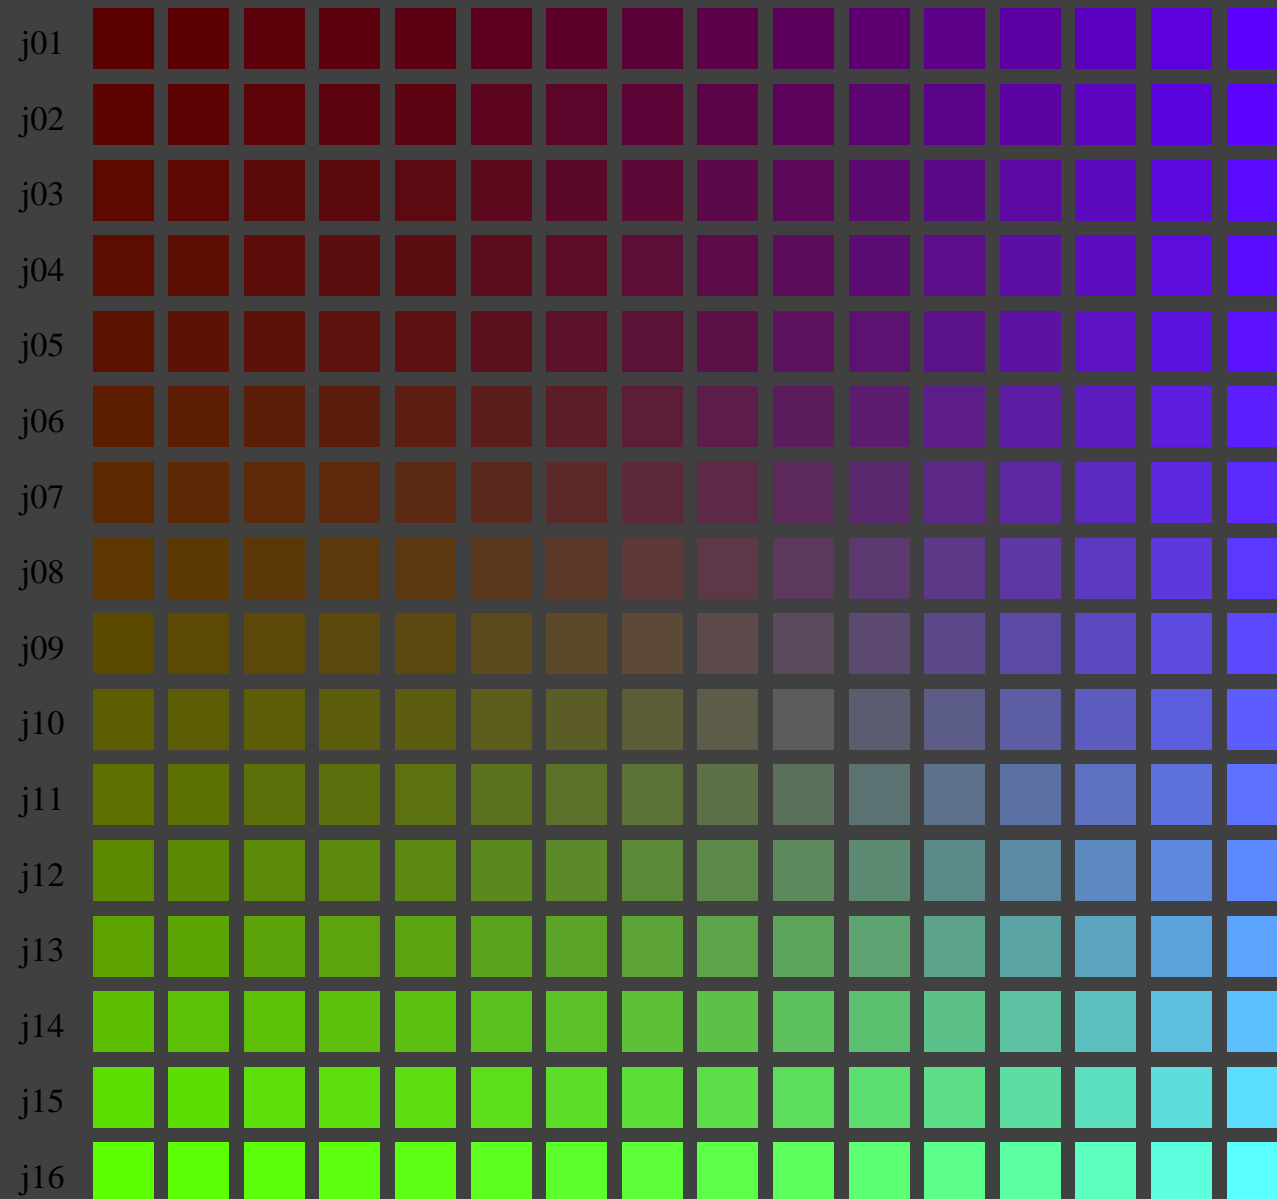

( $olv3^* = 0.6, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.6 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  *setrgbcolor*  
output:  $olv^*$  *setrgbcolor* /  $w^*$  *setgray*

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E09FP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 10/16; Serie: 1/1, Page: 10 Page count: 10

( $olv3^* = 0.666, l3^*, v3^*$ )

( $olv3^* = 0.666, 0, 1$ )

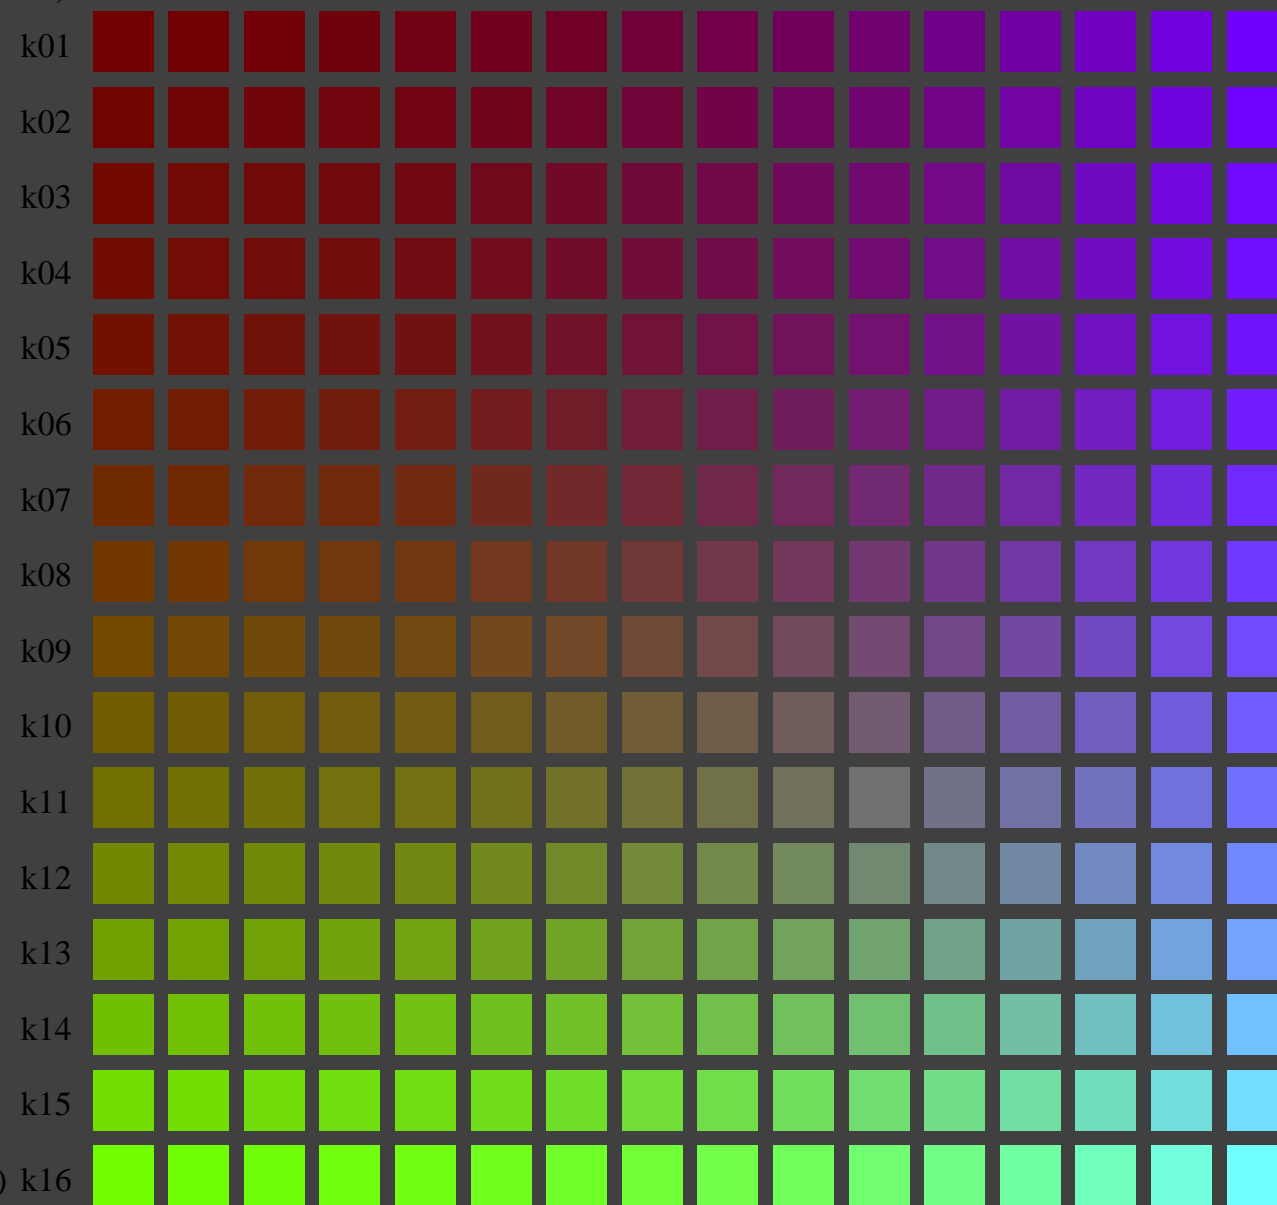

( $olv3^* = 0.666, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.666 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>


Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0AFP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 11/16; Serie: 1/1, Page: 11, Page count: 11

( $olv3^* = 0.733, l3^*, v3^*$ )

( $olv3^* = 0.733, 0, 1$ )

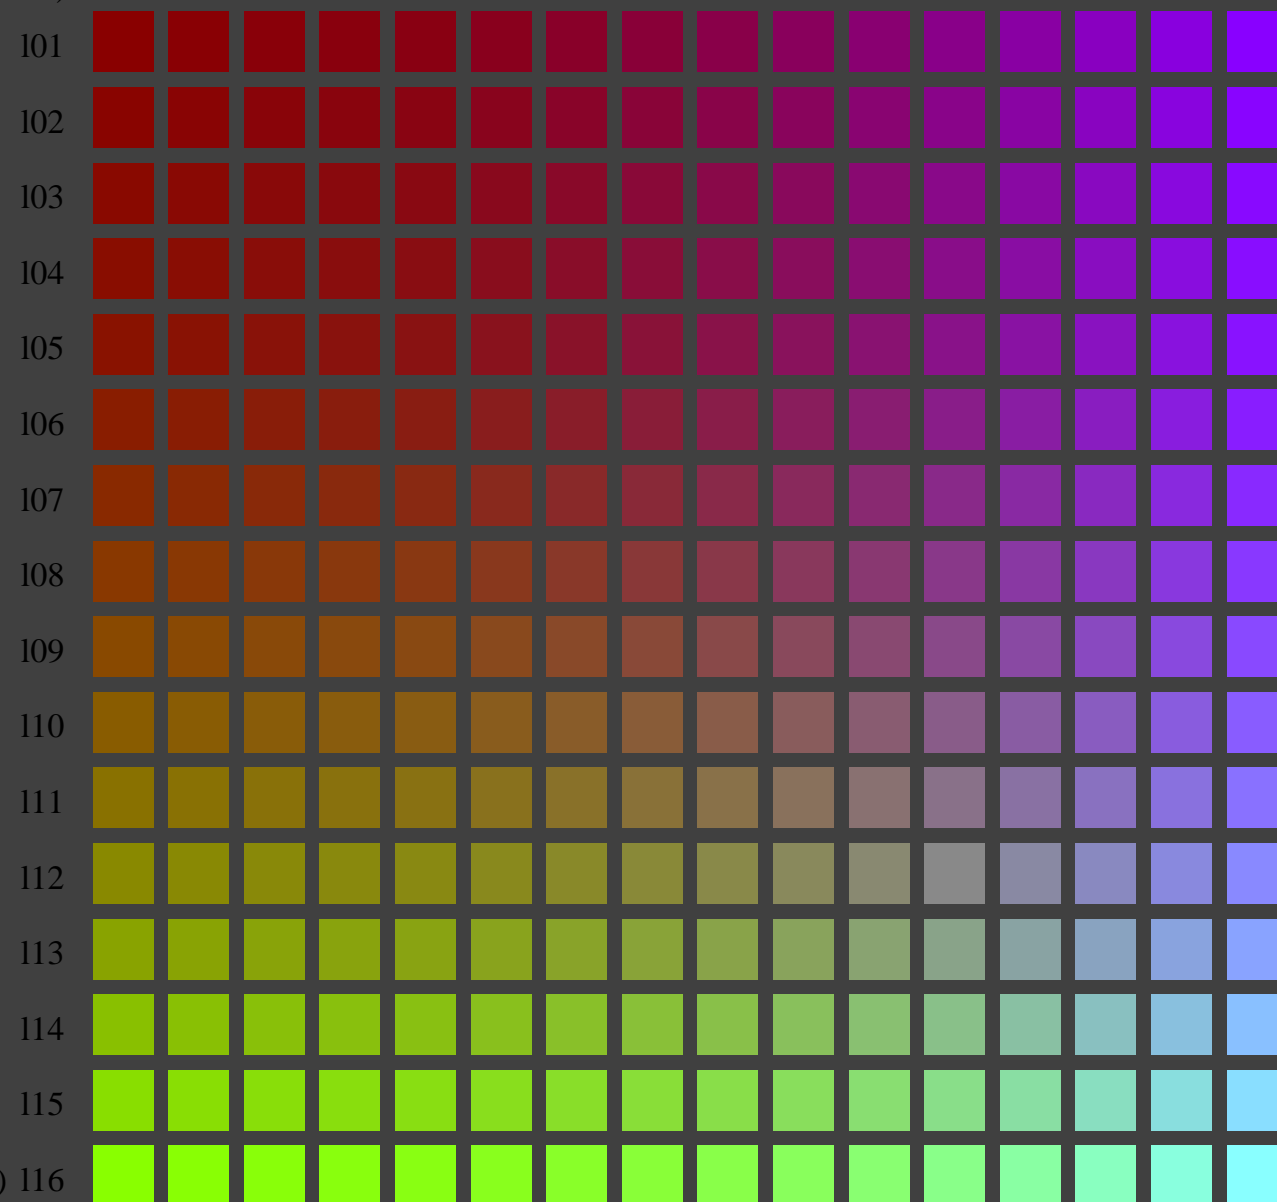

( $olv3^* = 0.733, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.733 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  *setrgbcolor*  
output:  $olv^*$  *setrgbcolor* /  $w^*$  *setgray*


See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>

Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0BFP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 12/16; Serie: 1/1, Page: 12, Page count: 12

( $olv3^* = 0.8, l3^*, v3^*$ )

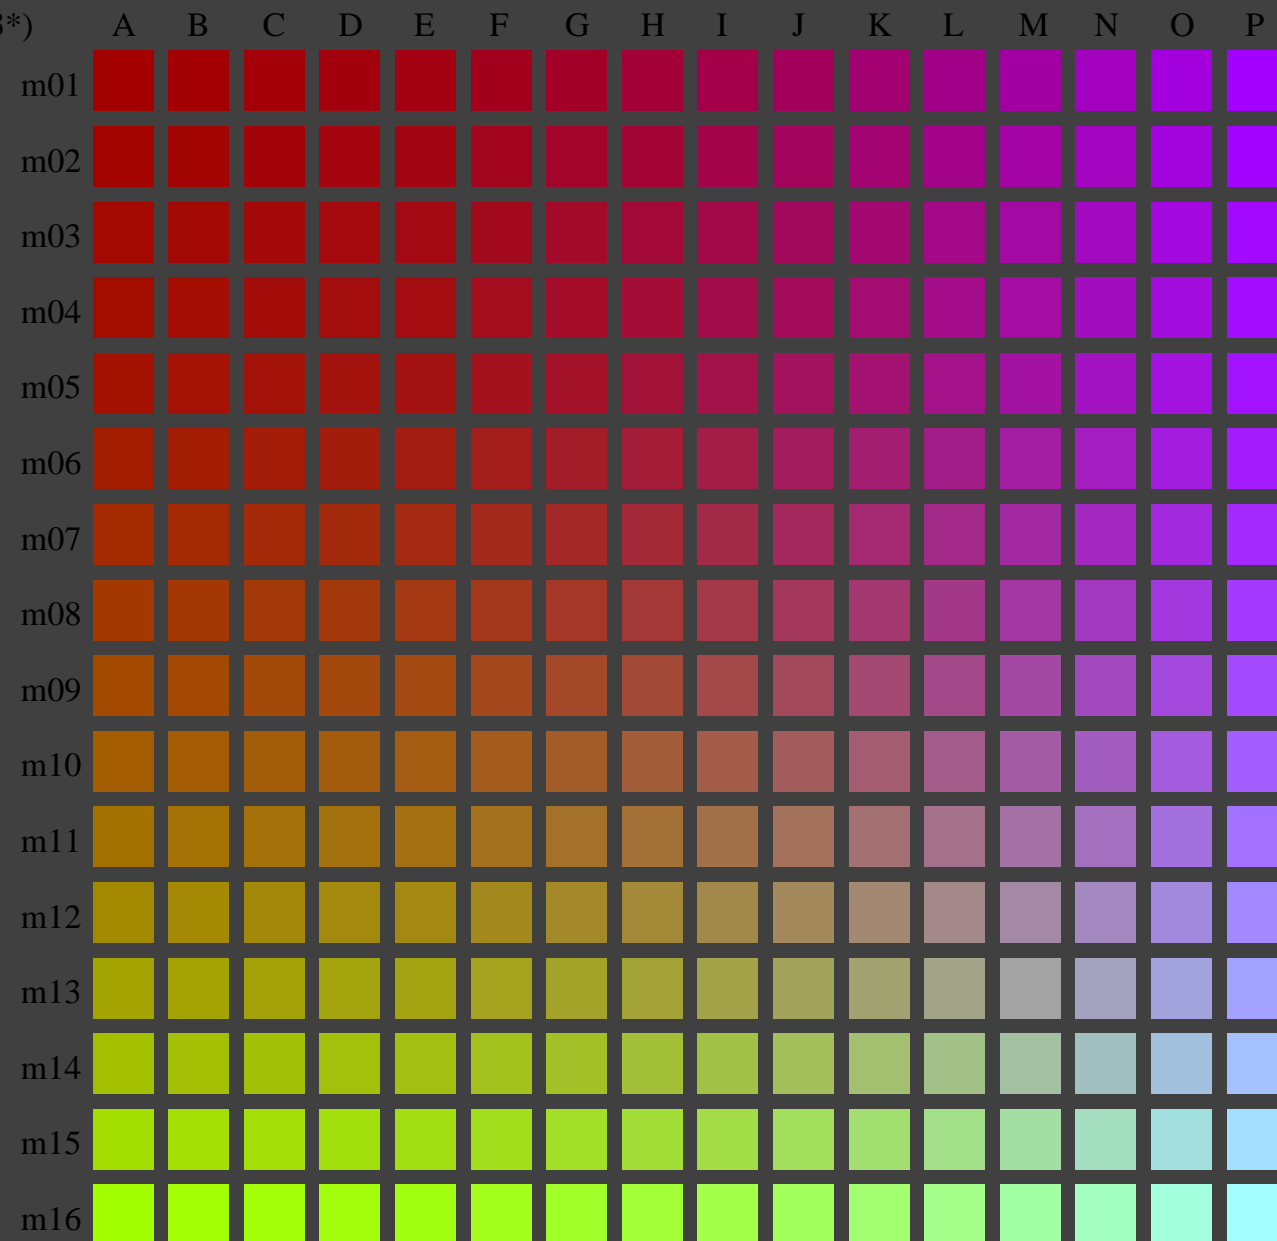

( $olv3^* = 0.8, 0, 1$ )

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>  
Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0CFP.PS/.PDF  
application for measurement of printer systems  
BAM material: code=rh4ta  
/LE33 Form: 13/16; Serie: 1/1, Page: 13 Page count: 13

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.8 = \text{const.}$


BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  setrgbcolor  
output:  $olv^*$  setrgbcolor /  $w^*$  setgray



( $olv3^* = 0.866, l3^*, v3^*$ )

( $olv3^* = 0.866, 0, 1$ )

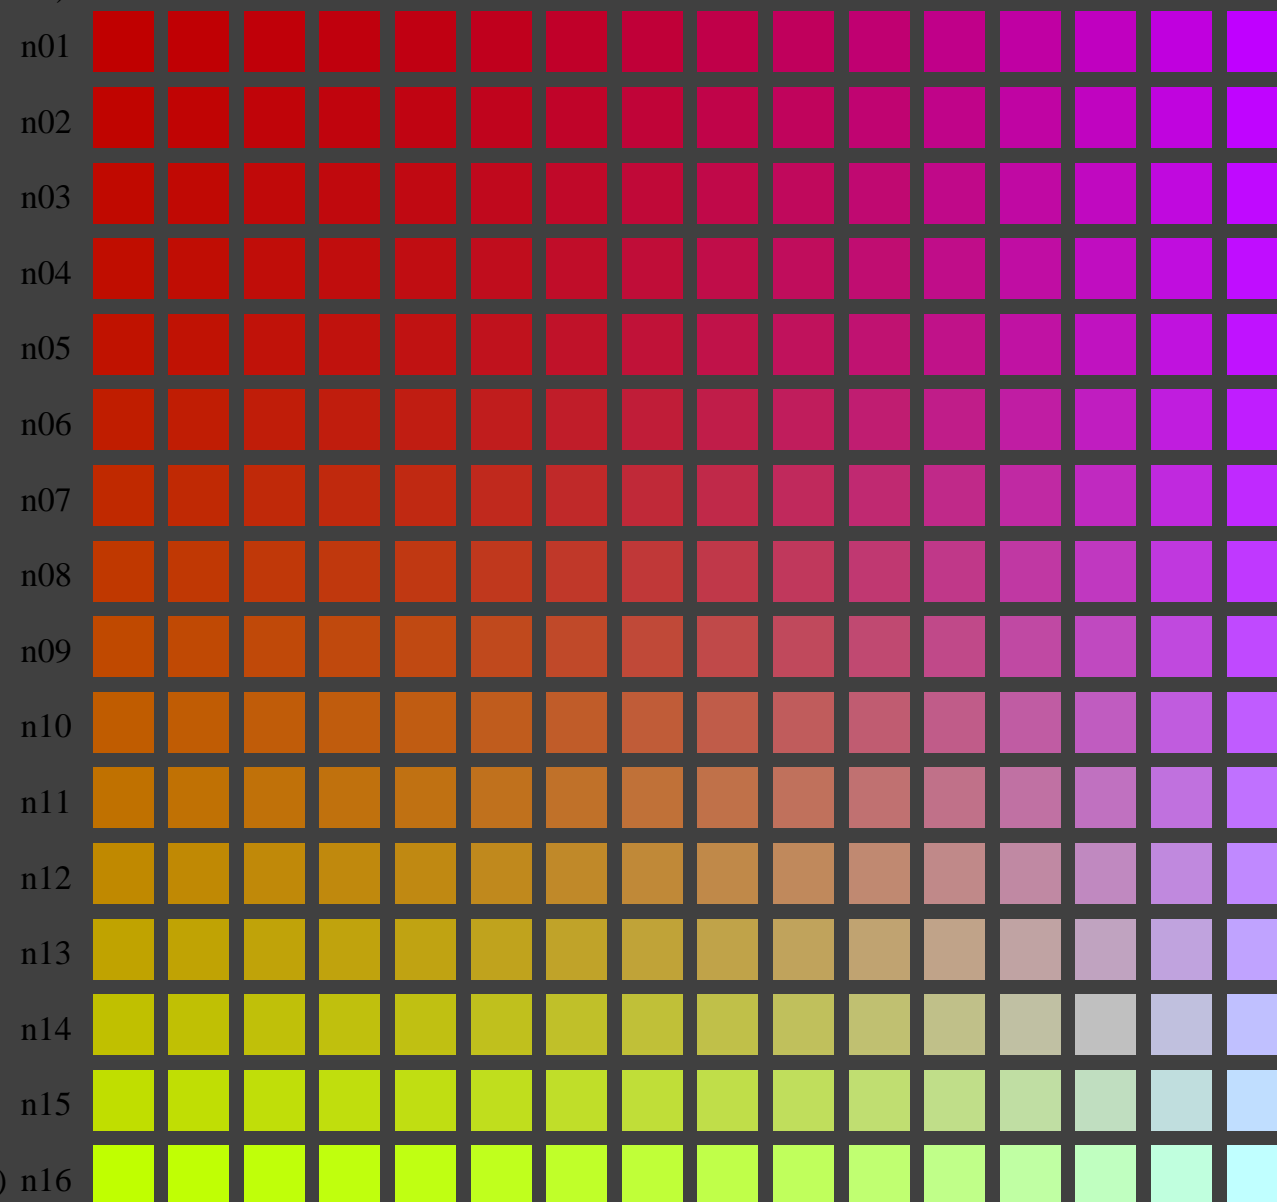

( $olv3^* = 0.866, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.866 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999


input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>  
Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0DFP.PS/.PDF  
application for measurement of printer systems  
BAM material: code=rh4ta  
/LE33 Form: 14/16; Serie: 1/1, Page: 14 Page count: 14

( $olv3^* = 0.933, l3^*, v3^*$ )

( $olv3^* = 0.933, 0, 1$ )

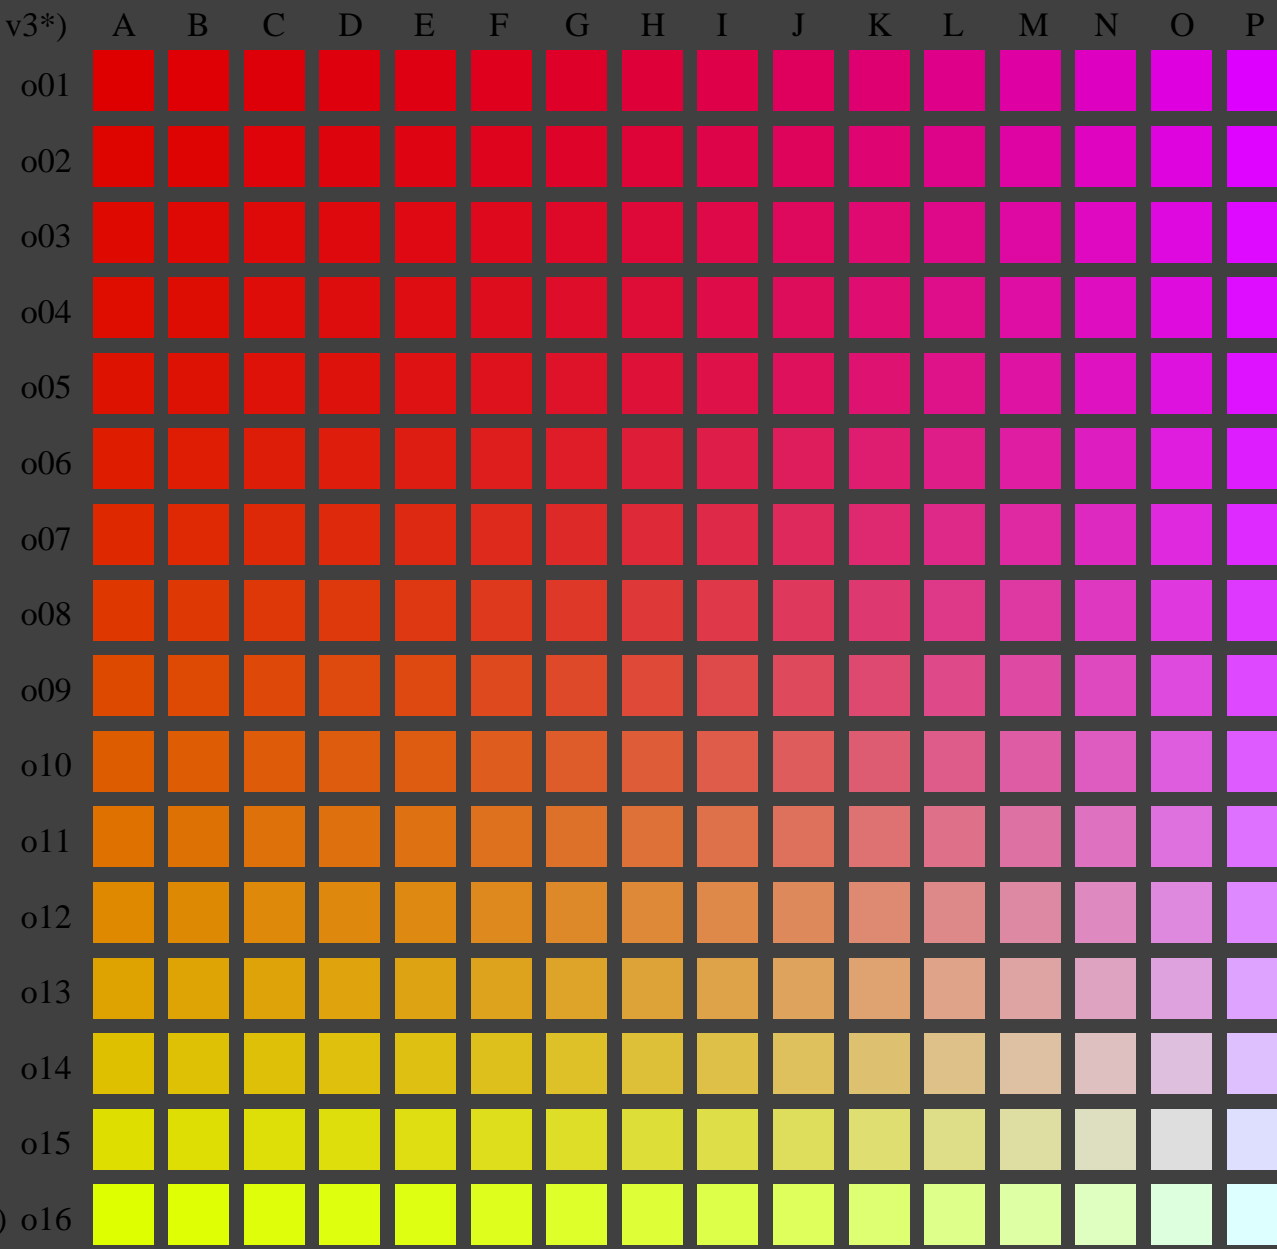

( $olv3^* = 0.933, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 0.933 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^* \text{ setrgbcolor}$   
output:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$


See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>  
Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0EFP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 15/16; Serie: 1/1, Page: 15 Page count: 15

( $olv3^* = 1.0, l3^*, v3^*$ )

( $olv3^* = 1.0, 0, 1$ )

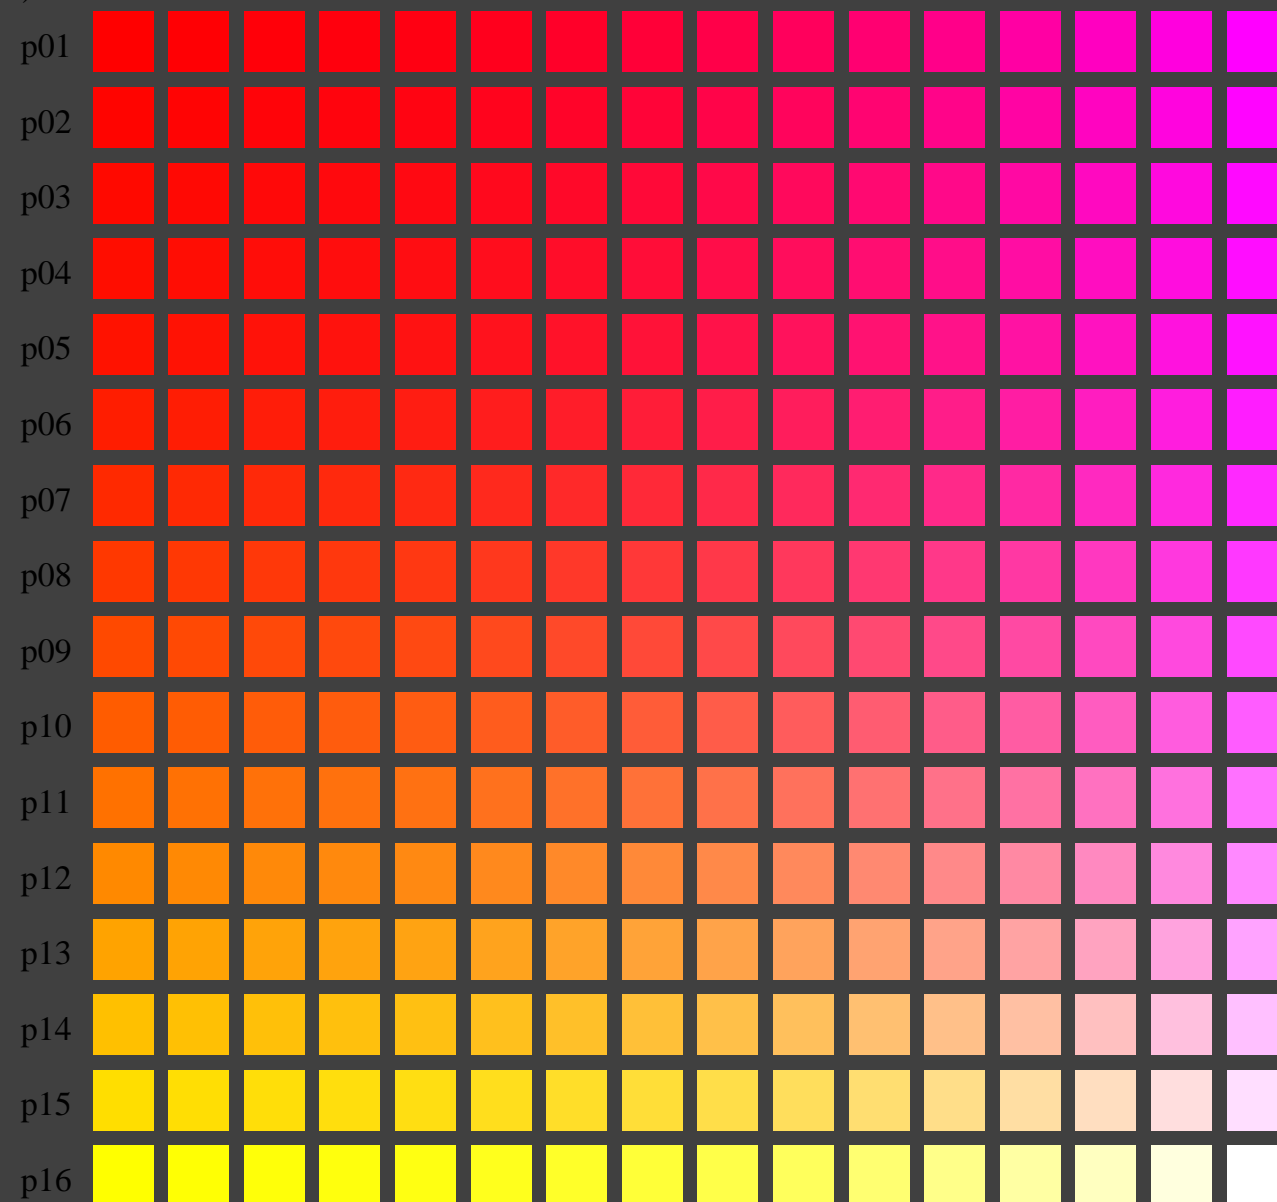

( $olv3^* = 1.0, 1, 0$ )

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates  $olv3^*$  of ISO/IEC 15775:1999 as input;  $r3^* = o3^* = 1.0 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00  
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input:  $olv3^*$  *setrgbcolor*  
output:  $olv^*$  *setrgbcolor* /  $w^*$  *setgray*

See for similar files: <http://www.ps.bam.de/LE33/>  
Technical information: <http://www.ps.bam.de>

Version 2.1, io=1,1; iORS; oORS, CIELAB

BAM registration: 20050501-LE33/10S/S33E0FFP.PS/.PDF  
application for measurement of printer systems

BAM material: code=rh4ta  
/LE33 Form: 16/16; Serie: 1/1, Page: 16 Page count: 16