
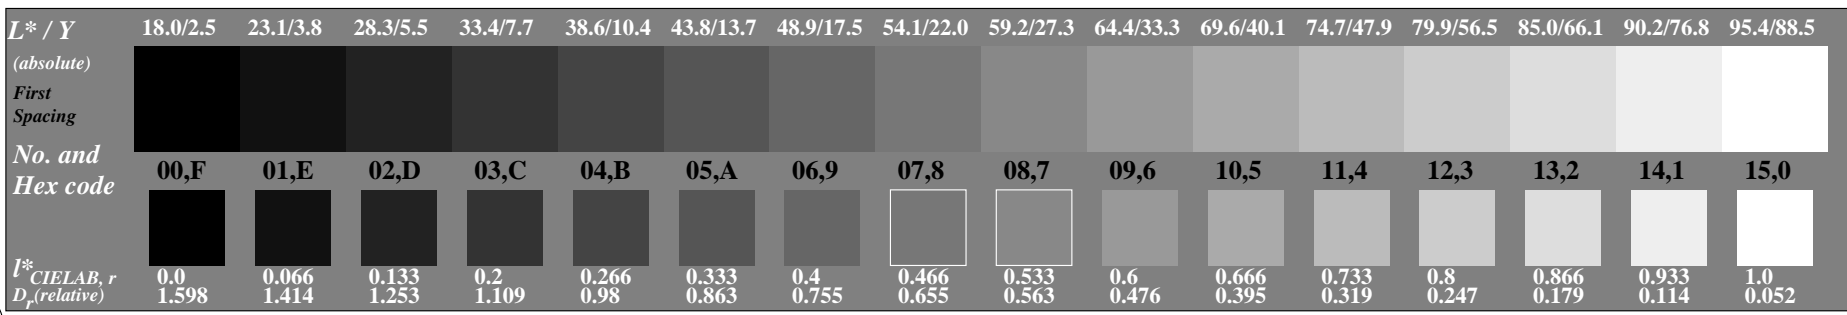
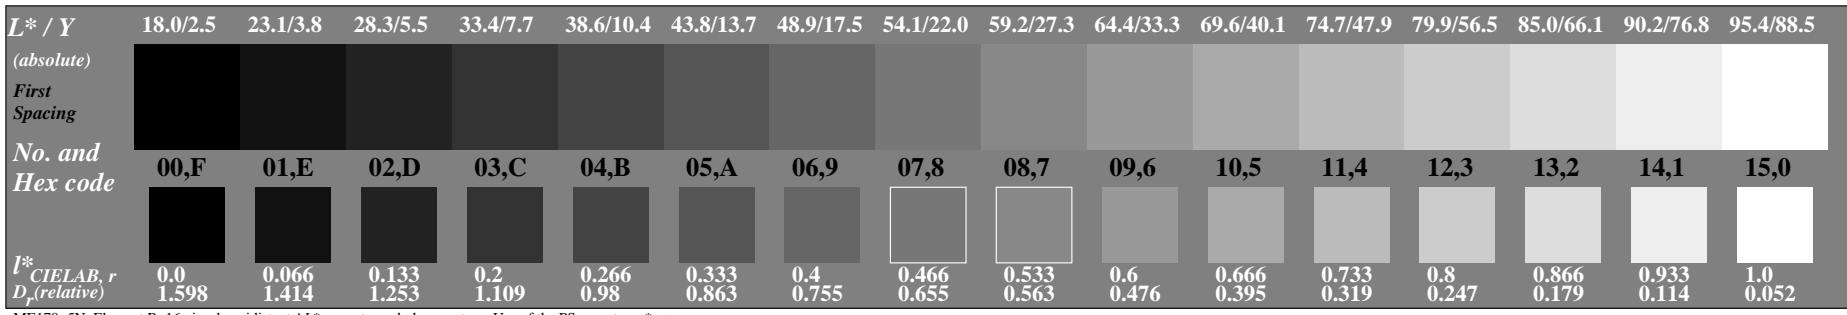


See for similar files: <http://www.ps.bam.de/ME17/>
 Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1.1

BAM registration: 20050501-ME17/10L/L17E00NP.PS/.PDF
 application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

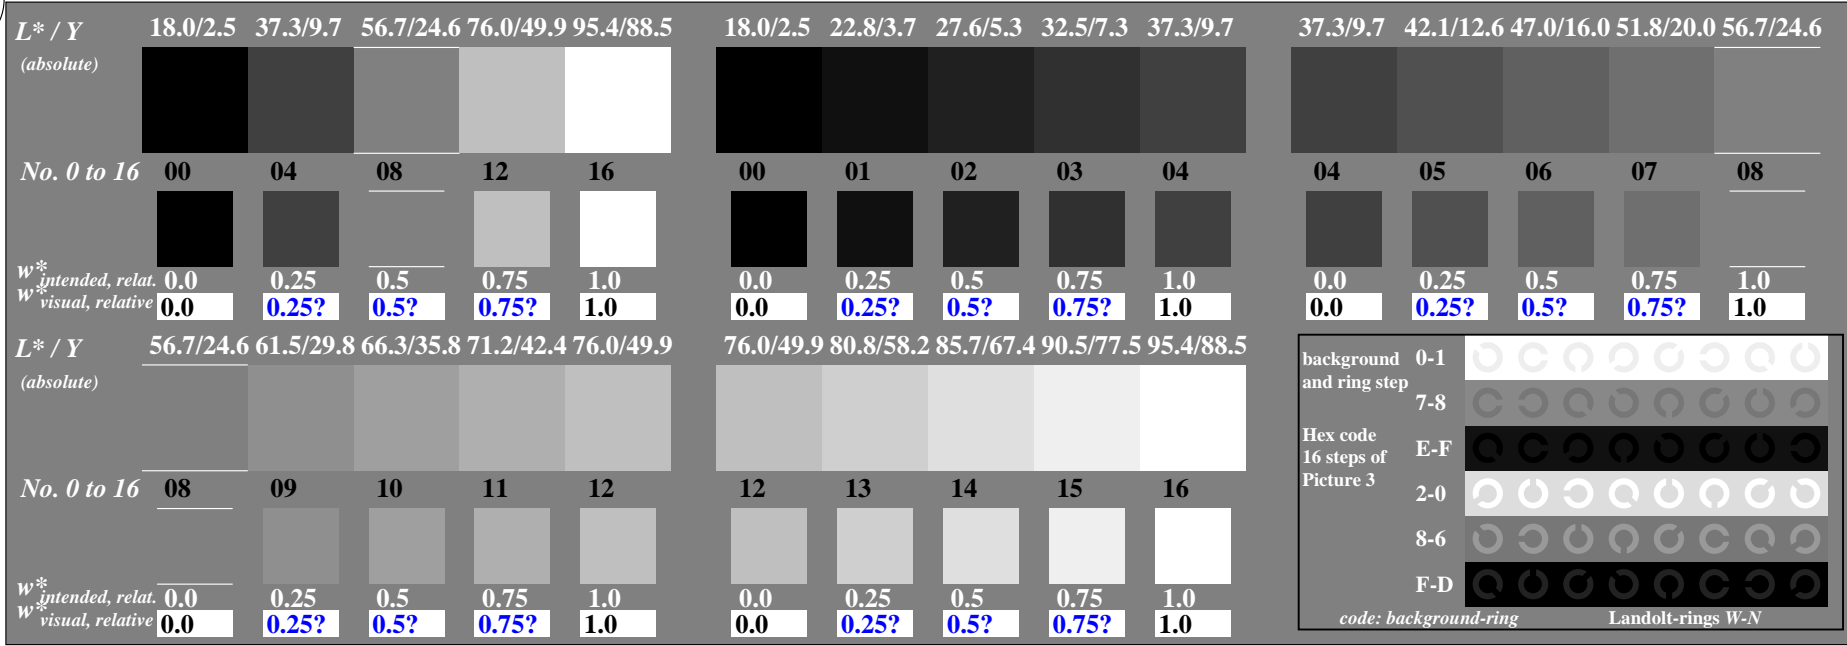

See for similar files: <http://www.ps.bam.de/ME17/>
 Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.0	0.01
2	23.16	0.0	0.07	0.0	0.04
3	28.32	0.0	0.13	0.0	0.02
4	33.48	0.0	0.2	0.0	0.02
5	38.64	0.0	0.27	0.0	0.04
6	43.8	0.0	0.33	0.0	0.01
7	48.96	0.0	0.4	0.0	0.04
8	54.12	0.0	0.47	0.0	0.02
9	59.28	0.0	0.53	0.0	0.02
10	64.44	0.0	0.6	0.0	0.04
11	69.6	0.0	0.67	0.0	0.01
12	74.76	0.0	0.73	0.0	0.04
13	79.92	0.0	0.8	0.0	0.02
14	85.08	0.0	0.87	0.0	0.02
15	90.24	0.0	0.93	0.0	0.04
16	95.4	0.0	1.0	0.0	0.01
17	18.0	0.0	0.0	0.0	0.01
18	37.35	0.0	0.25	0.0	0.03
19	56.7	0.0	0.5	0.0	0.01
20	76.05	0.0	0.75	0.0	0.03
21	95.4	0.0	1.0	0.0	0.01

Start output S1
 Specification according to
ISO/IEC 15775:1999 Annex G
 and **DIN 33866-1:2000 Annex C**

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

ME171-1N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.0	0.01
2	23.16	0.0	0.07	0.0	0.04
3	28.32	0.0	0.13	0.0	0.02
4	33.48	0.0	0.2	0.0	0.02
5	38.64	0.0	0.27	0.0	0.04
6	43.8	0.0	0.33	0.0	0.01
7	48.96	0.0	0.4	0.0	0.04
8	54.12	0.0	0.47	0.0	0.02
9	59.28	0.0	0.53	0.0	0.02
10	64.44	0.0	0.6	0.0	0.04
11	69.6	0.0	0.67	0.0	0.01
12	74.76	0.0	0.73	0.0	0.04
13	79.92	0.0	0.8	0.0	0.02
14	85.08	0.0	0.87	0.0	0.02
15	90.24	0.0	0.93	0.0	0.04
16	95.4	0.0	1.0	0.0	0.01
17	18.0	0.0	0.0	0.0	0.01
18	37.35	0.0	0.25	0.0	0.03
19	56.7	0.0	0.5	0.0	0.01
20	76.05	0.0	0.75	0.0	0.03
21	95.4	0.0	1.0	0.0	0.01


Intended output S2
 Specification according to
ISO/IEC 15775:1999 Annex G
 and **DIN 33866-1:2000 Annex C**

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.0$


Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

ME171-3N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

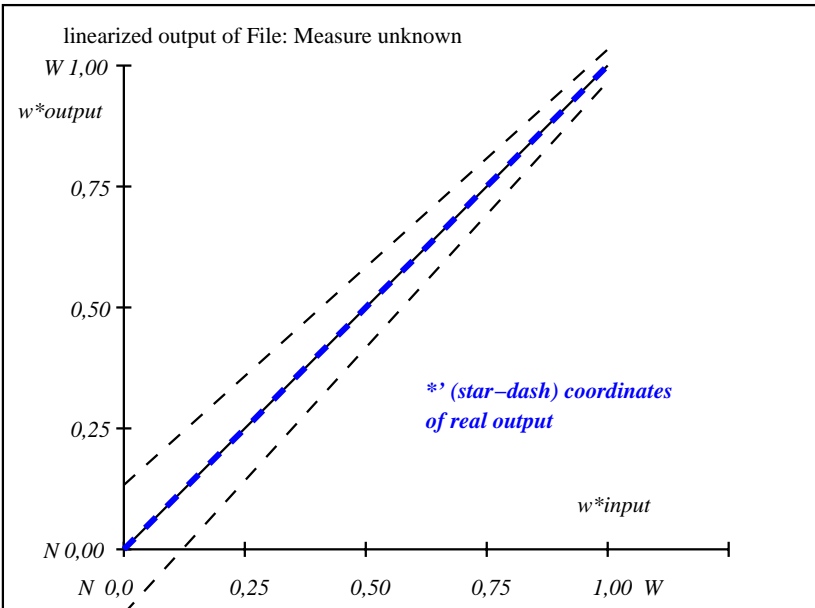

ME171-5N, File: Measure unknown; Device: Device unknown; Date: Date unknown

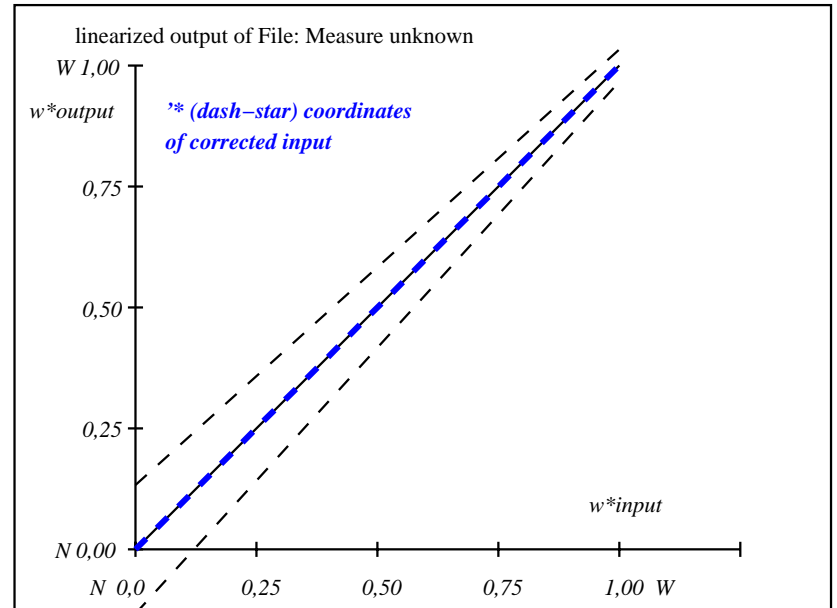

ME171-7N, File: Measure unknown; Device: Device unknown; Date: Date unknown

BAM registration: 20050501-ME17/10L/L17E01NP.PS/.PDF
 application for displays (Yr=2.5) and printers




BAM material: code=rh4ta

See for similar files: <http://www.ps.bam.de/ME17/>
 Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1.1

BAM registration: 20050501-ME17/10L/L17E02NP.PS/.PDF
 application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

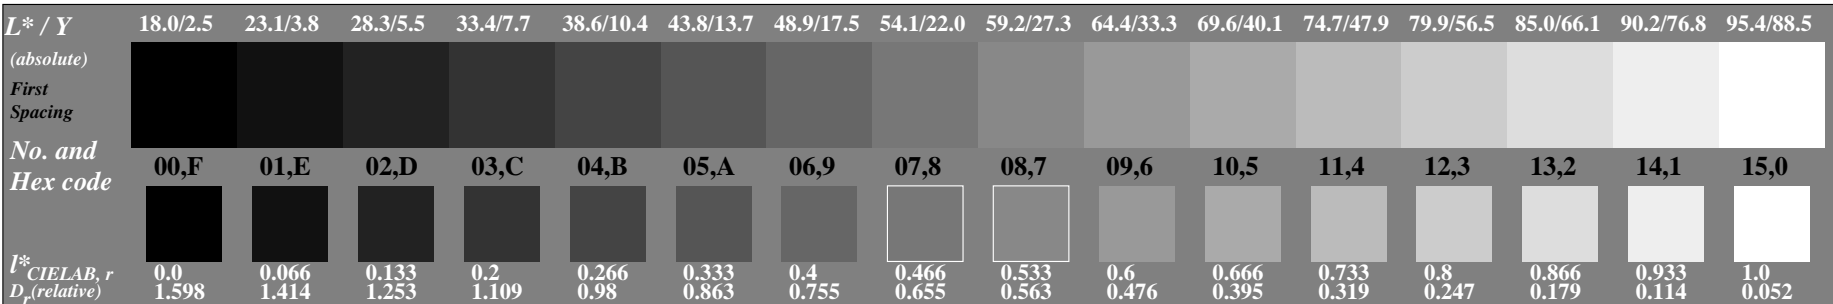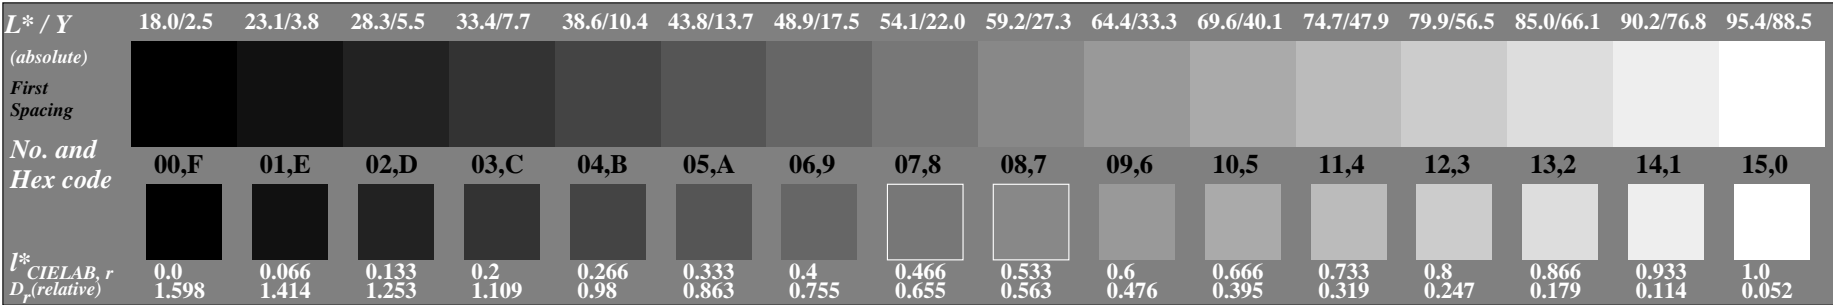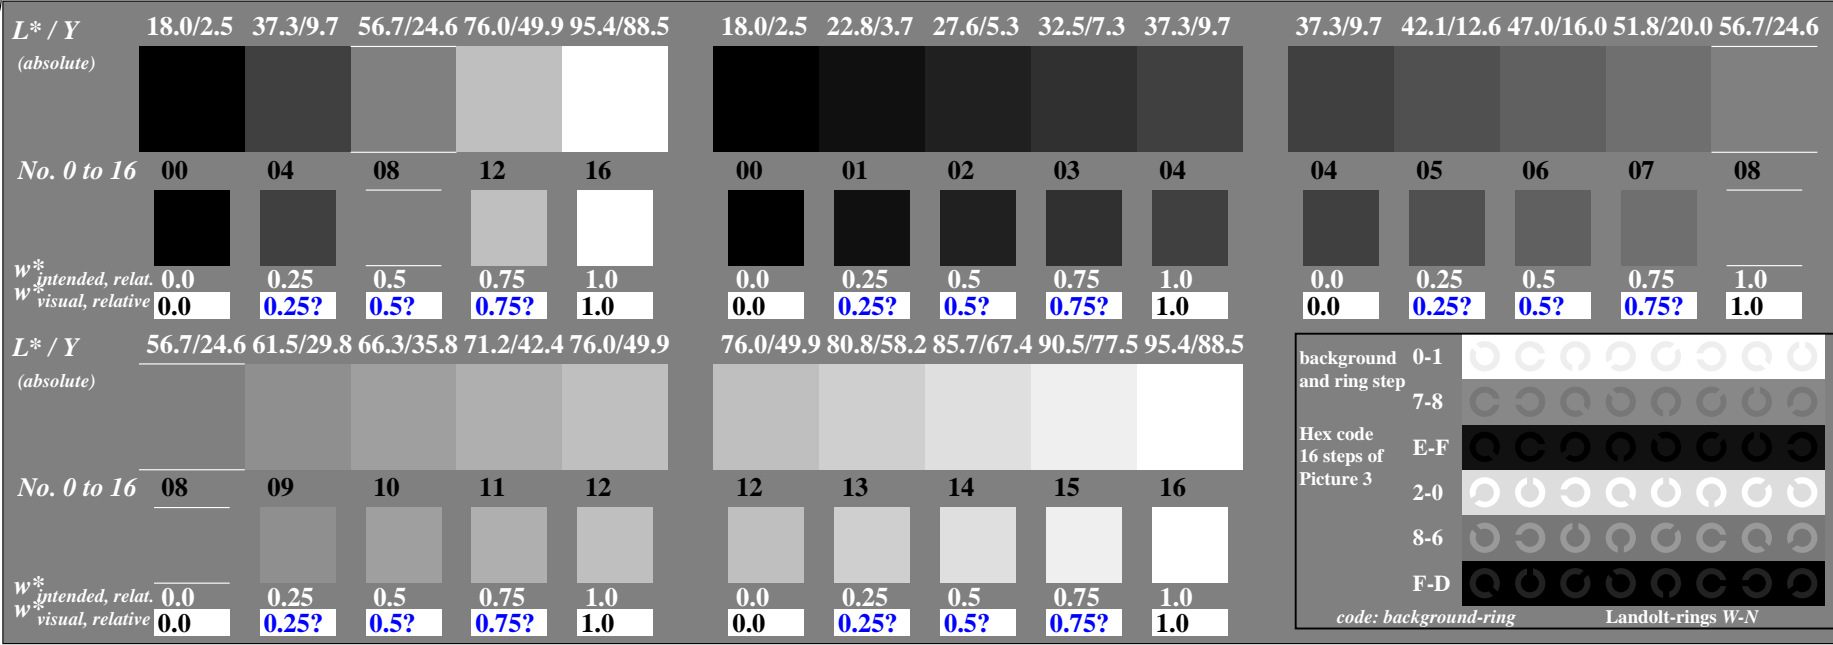

See for similar files: <http://www.ps.bam.de/ME17/>
 Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.01
2	23.16	0.0	0.07	23.2	0.0	0.04
3	28.32	0.0	0.13	28.3	0.0	0.02
4	33.48	0.0	0.2	33.5	0.0	0.02
5	38.64	0.0	0.27	38.6	0.0	0.04
6	43.8	0.0	0.33	43.8	0.0	0.01
7	48.96	0.0	0.4	49.0	0.0	0.04
8	54.12	0.0	0.47	54.1	0.0	0.02
9	59.28	0.0	0.53	59.3	0.0	0.02
10	64.44	0.0	0.6	64.4	0.0	0.04
11	69.6	0.0	0.67	69.6	0.0	0.01
12	74.76	0.0	0.73	74.8	0.0	0.04
13	79.92	0.0	0.8	79.9	0.0	0.02
14	85.08	0.0	0.87	85.1	0.0	0.02
15	90.24	0.0	0.93	90.2	0.0	0.04
16	95.4	0.0	1.0	95.4	0.0	0.01
17	18.0	0.0	0.0	18.0	0.0	0.01
18	37.35	0.0	0.25	37.32	0.0	0.03
19	56.7	0.0	0.5	56.7	0.0	0.01
20	76.05	0.0	0.75	76.08	0.0	0.03
21	95.4	0.0	1.0	95.4	0.0	0.01

Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

ME171-1N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*	Intended output S2
1	18.0	0.0	0.0	18.0	0.0	0.01
2	23.16	0.0	0.07	23.2	0.0	0.04
3	28.32	0.0	0.13	28.3	0.0	0.02
4	33.48	0.0	0.2	33.5	0.0	0.02
5	38.64	0.0	0.27	38.6	0.0	0.04
6	43.8	0.0	0.33	43.8	0.0	0.01
7	48.96	0.0	0.4	49.0	0.0	0.04
8	54.12	0.0	0.47	54.1	0.0	0.02
9	59.28	0.0	0.53	59.3	0.0	0.02
10	64.44	0.0	0.6	64.4	0.0	0.04
11	69.6	0.0	0.67	69.6	0.0	0.01
12	74.76	0.0	0.73	74.8	0.0	0.04
13	79.92	0.0	0.8	79.9	0.0	0.02
14	85.08	0.0	0.87	85.1	0.0	0.02
15	90.24	0.0	0.93	90.2	0.0	0.04
16	95.4	0.0	1.0	95.4	0.0	0.01
17	18.0	0.0	0.0	18.0	0.0	0.01
18	37.35	0.0	0.25	37.32	0.0	0.03
19	56.7	0.0	0.5	56.7	0.0	0.01
20	76.05	0.0	0.75	76.08	0.0	0.03
21	95.4	0.0	1.0	95.4	0.0	0.01



Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

ME171-3N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

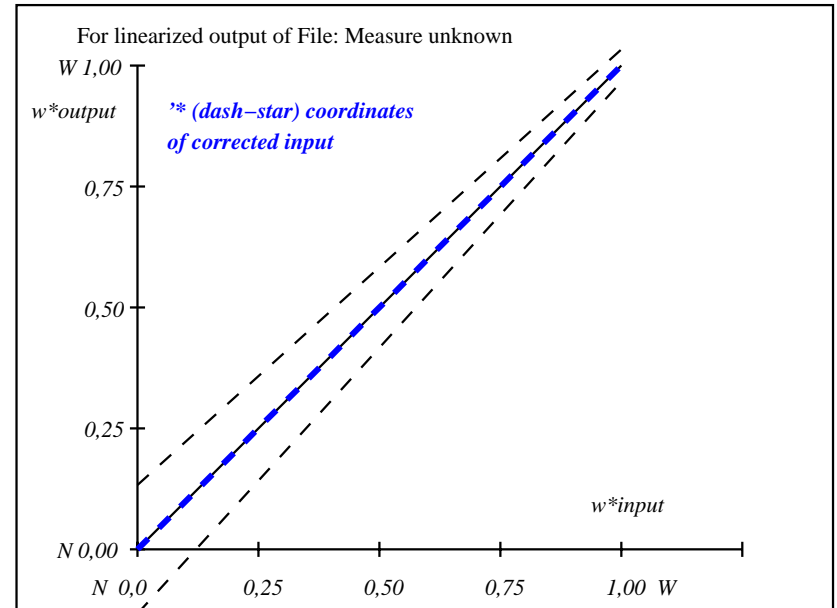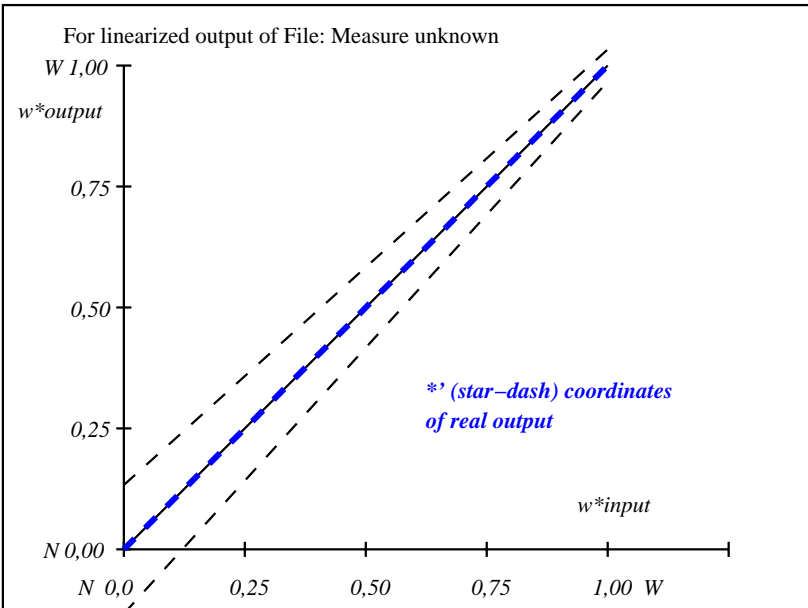

BAM registration: 20050501-ME17/10L/L17E03NP.PS/.PDF
 application for displays (Yr=2.5) and printers

BAM material: code=rh4ta