



See for similar files: <http://www.ps.bam.de/XE77/>  
 Technical information: <http://www.ps.bam.de>


BAM registration: 20061001-XE77/10L/L77E00NP.PS/.PDF BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems  
 /XE77/ Form: 1/10, Seite: 1/1, Page: 1 Page count: 1

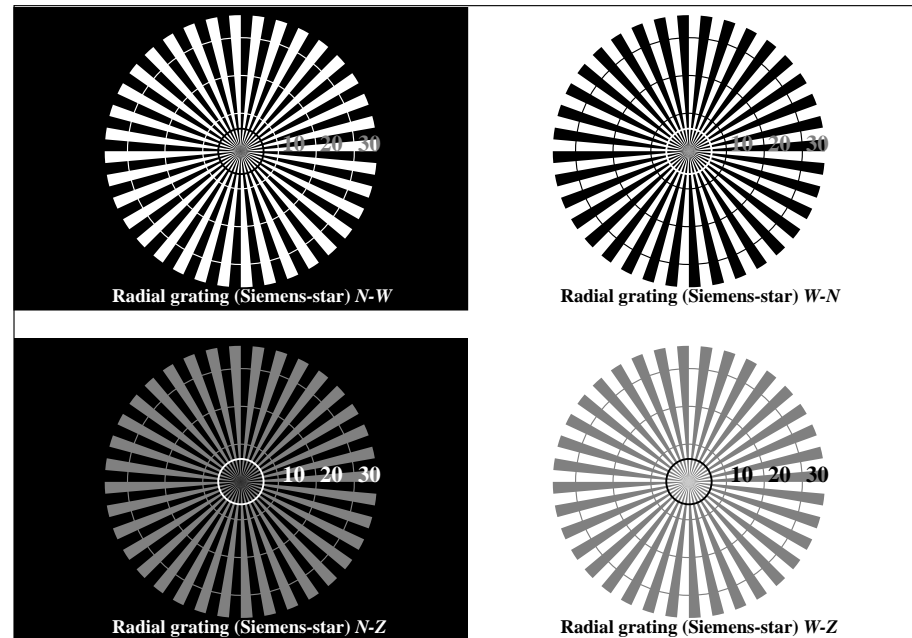


XE770-3, Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *w\*lin 1.0 exp setgray*

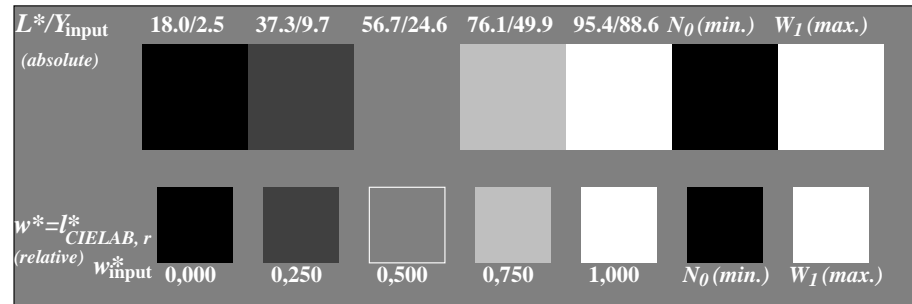


XE770-5, Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: *w\*lin 1.0 exp setgray*

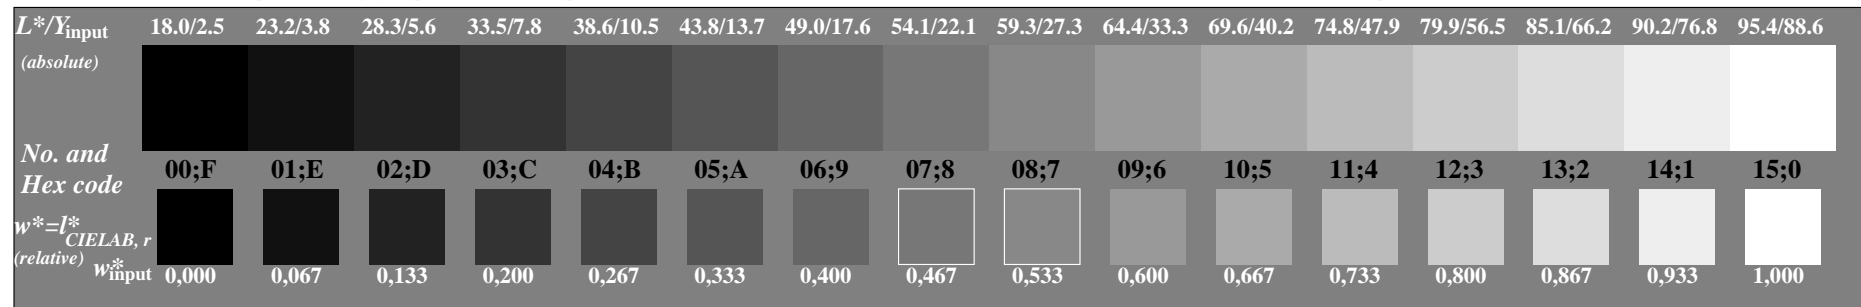


XE770-7, Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *w\*lin 1.0 exp setgray*

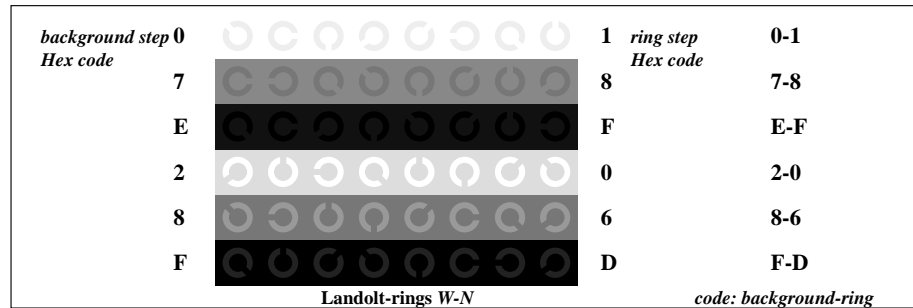

XE771-1, Picture C4: Landolt-rings W-N; PS operator: *w\*lin 1.0 exp setgray*

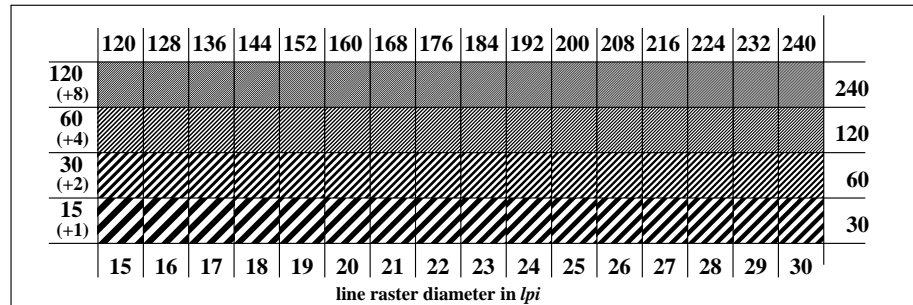

XE771-3, Picture C5: Line raster under 45 (or 135); PS operator: *w\*lin 1.0 exp setgray*

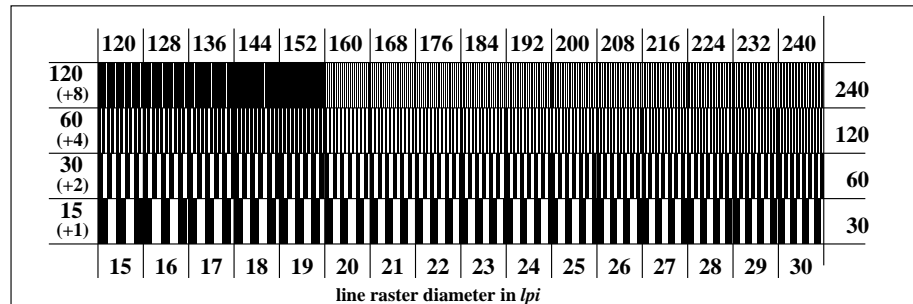

XE771-5, Picture C6: Line raster under 90 (or 0); PS operator: *w\*lin 1.0 exp setgray*



BAM-test chart XE77; FRS06 & FRS06 ISO/IEC 15775 and ISO/IEC TR 24705; input: *w\* setgray*  
 Fig. C1 to C6 of ISO/IEC-test chart 3; ISO/IEC TR 24705; output: no change compared to input