



XE780-3, Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0* setcmycolor*

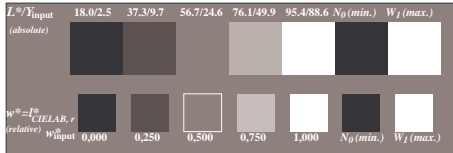


XE780-5, Picture C2: 5 visual equidistant L^* -grey steps + $N_0 + W_1$; PS operator: *omy0* setcmycolor*

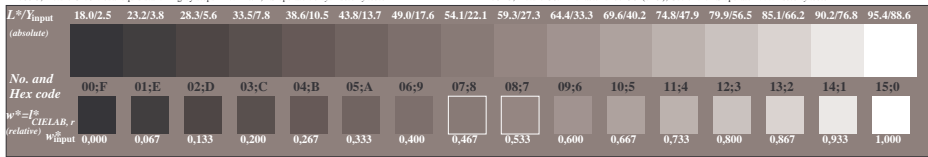


XE780-7, Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmycolor*


BAM-test chart XE78; FRS06 & FRS06 ISO/IEC 15775 and input: *nnn0* setcmycolor*
 Fig. C1 to C6 of ISO/IEC-test chart 3; ISO/IEC TR 24705; output: no change compared to input

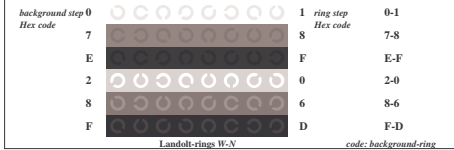

XE781-1, Picture C4: Landolt-rings W-N; PS operator: *nnn0* setcmycolor*

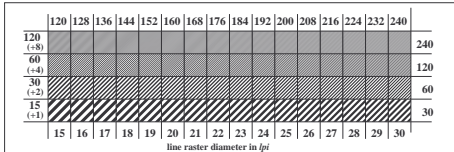

XE781-3, Picture C5: Line raster under 45 (or 135); PS operator: *nnn0* setcmycolor*

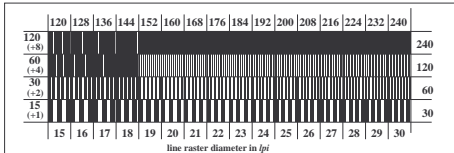

XE781-5, Picture C6: Line raster under 90 (or 0); Use of the PS operator *nnn0* setcmycolor*