

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	84.3	-4.1	110.2	92	84.3	-4.1	110.2	92
	2	84.8	-3.8	103.3	92	85.7	-5.9	98.1	93
	3	85.3	-3.6	96.4	92	86.8	-7.5	85.9	95
	4	85.8	-3.3	89.5	92	87.5	-8.3	77.2	96
	5	86.3	-3.0	82.6	92	88.2	-8.6	67.4	97
	6	86.9	-2.8	75.8	92	88.5	-8.6	61.7	98
	7	87.4	-2.5	68.9	92	89.0	-8.5	54.3	99
	8	87.9	-2.3	62.0	92	89.5	-8.1	46.9	100
	9	88.4	-2.0	55.1	92	90.1	-7.8	40.1	101
	10	88.9	-1.7	48.2	92	90.5	-6.9	33.3	102
	11	89.5	-1.5	41.3	92	91.0	-6.0	25.6	103
	12	90.0	-1.2	34.4	92	91.5	-4.7	18.6	104
	13	90.5	-1.0	27.6	92	91.9	-3.2	12.0	105
	14	91.0	-0.7	20.7	92	92.2	-1.8	6.5	106
	15	91.5	-0.4	13.8	92	92.5	-0.6	2.0	109
	16	92.1	-0.2	6.9	92	92.6	0.0	0.1	90
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0	0
Y	18	84.3	-4.1	110.2	92	84.3	-4.1	110.2	92
	19	86.3	-3.0	82.6	92	88.2	-8.6	67.4	97
	20	88.4	-2.0	55.1	92	90.1	-7.8	40.1	101
	21	90.5	-1.0	27.6	92	91.9	-3.2	12.0	105
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0	0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.58 - 84.27$
Regularity
 $g^* = 18.5$
Lightness gamut relative to offset
 $f^* = 10.7$
Yellow - White
rgb: Y - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 12.1$
 $\Delta E^*_{CIELAB} = 12.2$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 9.6$
 $\Delta E^*_{CIELAB} = 9.7$
Mean colour reproduction index: $R^*_{ab,m} = 47$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.9	-16.9	112.4	99	90.9	-16.9	112.4	99
	2	91.2	-15.8	105.4	99	90.8	-16.9	112.7	99
	3	91.5	-14.8	98.4	99	90.8	-16.8	112.6	99
	4	91.7	-13.7	91.3	99	90.9	-16.8	111.9	99
	5	92.0	-12.7	84.3	99	91.0	-17.0	108.7	99
	6	92.3	-11.6	77.3	99	91.1	-17.1	105.1	99
	7	92.6	-10.6	70.3	99	91.1	-17.2	99.2	100
	8	92.9	-9.5	63.2	99	91.5	-16.9	89.7	101
	9	93.2	-8.5	56.2	99	91.9	-16.0	75.8	102
	10	93.4	-7.4	49.2	99	92.3	-15.1	66.4	103
	11	93.7	-6.3	42.2	99	92.6	-13.9	57.1	104
	12	94.0	-5.3	35.1	99	93.0	-12.7	48.1	105
	13	94.3	-4.2	28.1	99	93.3	-11.5	41.2	106
	14	94.6	-3.2	21.1	99	93.9	-8.9	29.4	107
	15	94.9	-2.1	14.1	99	94.4	-6.2	19.0	108
	16	95.1	-1.1	7.0	99	95.0	-3.2	9.0	110
W	17	95.4	0.0	0.0	180	95.4	0.0	0.0	180
Y	18	90.9	-16.9	112.4	99	90.9	-16.9	112.4	99
	19	92.0	-12.7	84.3	99	91.0	-17.0	108.7	99
	20	93.2	-8.5	56.2	99	91.9	-16.0	75.8	102
	21	94.3	-4.2	28.1	99	93.3	-11.5	41.2	106
W	22	95.4	0.0	0.0	180	95.4	0.0	0.0	180

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.43 - 90.9$
Regularity
 $g^* = 3.8$
Lightness gamut relative to offset
 $f^* = 5.9$
Yellow - White
rgb: Y - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 15.2$
 $\Delta E^*_{CIELAB} = 15.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 12.2$
 $\Delta E^*_{CIELAB} = 12.2$
Mean colour reproduction index: $R^*_{ab,m} = 33$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

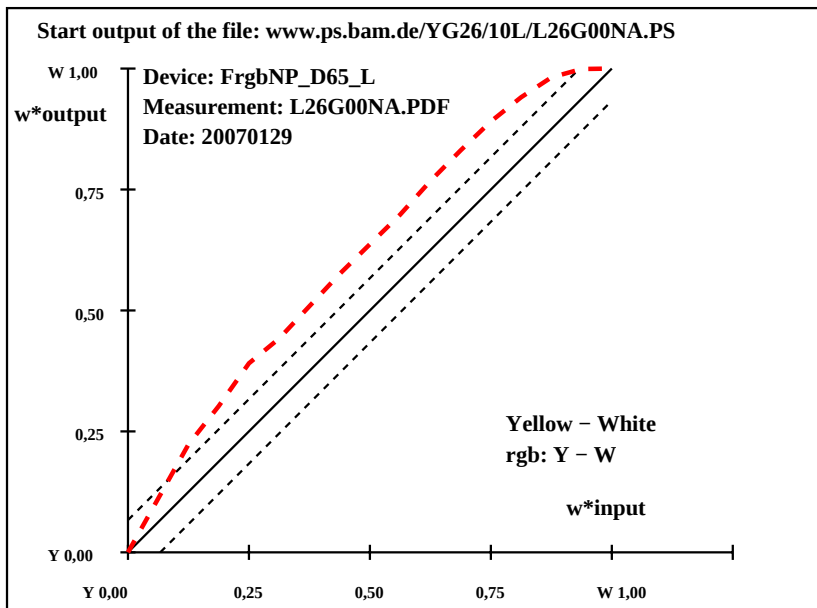

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

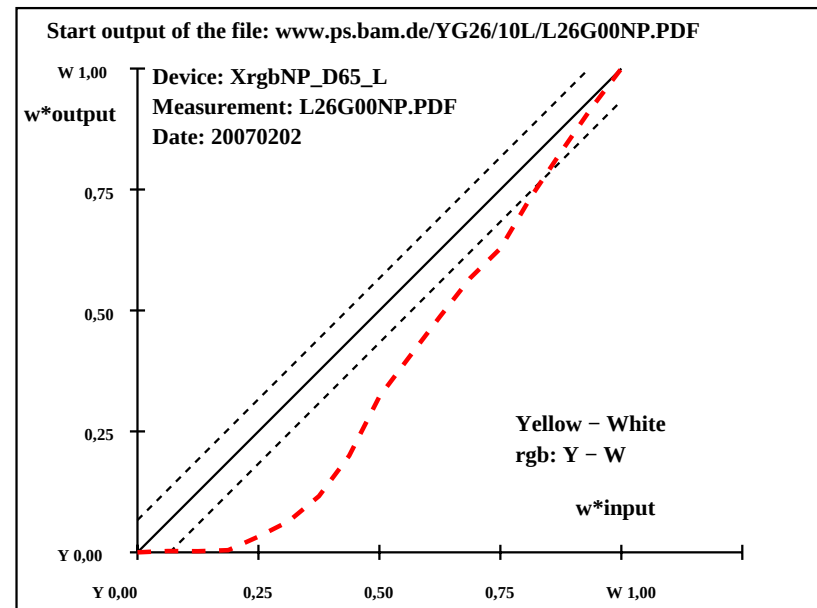

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202