

Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G												
T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH*	ΔE*				
R	1	22.5	32.1	14.9	25	24.2	35.8	24.5	34	1.7	3.7	9.6
	2	24.2	27.8	24.8	42	47.6	-2.3	55.8	92	23.4	-30.1	31.0
	3	30.0	20.0	32.7	59	40.4	9.2	45.9	79	10.4	-10.7	13.2
	4	36.7	11.0	41.8	75	31.9	23.1	34.8	56	-4.7	12.1	-6.9
J	5	46.3	-1.8	54.9	92	54.9	-14.0	66.1	102	8.6	-12.1	11.2
	6	37.6	-14.6	41.6	109	50.9	-23.6	59.8	112	13.3	-8.9	18.2
	7	31.2	-23.8	31.7	127	46.5	-32.8	53.0	122	15.3	-8.9	21.3
	8	26.7	-29.5	21.1	145	41.8	-42.0	45.4	133	15.1	-12.4	24.3
G	9	28.3	-24.1	7.9	162	36.2	-49.6	37.9	143	7.9	-25.4	30.0
	10	29.7	-19.5	-3.2	190	38.9	-41.3	5.4	173	9.2	-21.7	8.7
C	11	30.7	-15.9	-12.0	217	40.8	-28.6	-15.6	209	10.1	-12.6	-3.5
	12	28.3	-8.5	-17.9	245	28.3	-1.5	-29.7	267	0.0	7.0	-11.7
B	13	23.8	0.7	-21.2	272	11.9	34.7	-43.9	308	-11.8	34.0	-22.6
	14	16.7	15.5	-26.4	300	18.8	42.6	-38.8	318	2.1	27.1	-12.3
M	15	19.8	35.2	-21.4	329	26.0	52.6	-29.9	330	6.3	17.4	-8.4
	16	23.1	36.0	-1.9	357	24.5	43.6	-10.0	347	1.3	7.6	-8.0
R	17	22.5	32.1	14.9	25	23.0	35.3	23.8	34	0.4	3.2	8.9
R	18	22.5	32.1	14.9	25	24.2	35.8	24.5	34	1.7	3.7	9.6
J	19	46.3	-1.8	54.9	92	54.9	-14.0	66.1	102	8.6	-12.1	11.2
G	20	28.3	-24.1	7.9	162	36.2	-49.6	37.9	143	7.9	-25.4	30.0
B	21	23.8	0.7	-21.2	272	11.9	34.7	-43.9	308	-11.8	34.0	-22.6
R	22	22.5	32.1	14.9	25	23.0	35.3	23.8	34	0.4	3.2	8.9

(Red-Yellow-Green-Blue)n
rgb: (R-J-G-B-R)n

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 21.3$
 $\Delta E^*_{CIELAB} = 23.8$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 21.4$
 $\Delta E^*_{CIELAB} = 24.2$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G												
T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH*	ΔE*				
R	1	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8
	2	36.1	26.4	23.6	42	36.9	30.7	31.1	45	0.8	4.3	7.5
	3	40.5	18.8	30.7	58	41.3	20.1	38.2	62	0.8	1.3	7.5
	4	45.5	10.2	38.7	75	51.7	0.1	54.2	90	6.2	-10.0	15.5
J	5	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1
	6	49.6	-15.8	45.0	110	55.0	-21.3	57.0	111	5.4	-5.4	12.0
	7	42.1	-24.2	32.3	127	45.6	-37.7	39.7	134	3.5	-13.4	7.4
	8	36.1	-31.0	22.2	145	40.7	-47.2	30.7	147	4.6	-16.1	8.5
G	9	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6
	10	35.0	-21.1	-3.4	190	33.8	-38.0	16.0	157	-1.1	-16.8	19.5
C	11	35.5	-16.0	-12.1	217	37.0	-19.8	-26.7	233	1.4	-3.7	-14.5
	12	36.1	-10.4	-21.8	245	32.2	-4.0	-35.3	263	-3.9	6.4	-13.4
B	13	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5
	14	31.1	10.8	-18.4	300	26.0	15.0	-40.0	291	-4.9	4.2	-21.5
M	15	32.2	20.5	-12.4	329	30.4	41.8	-20.6	334	-1.7	21.3	-8.1
	16	33.9	35.4	-1.9	357	31.8	40.2	1.2	2	-2.0	4.8	3.2
R	17	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0
R	18	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8
J	19	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1
G	20	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6
B	21	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5
R	22	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0

(Red-Yellow-Green-Blue)n
rgb: (R-J-G-B-R)n


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 15.3$
 $\Delta E^*_{CIELAB} = 16.6$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 14.3$
 $\Delta E^*_{CIELAB} = 17.6$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

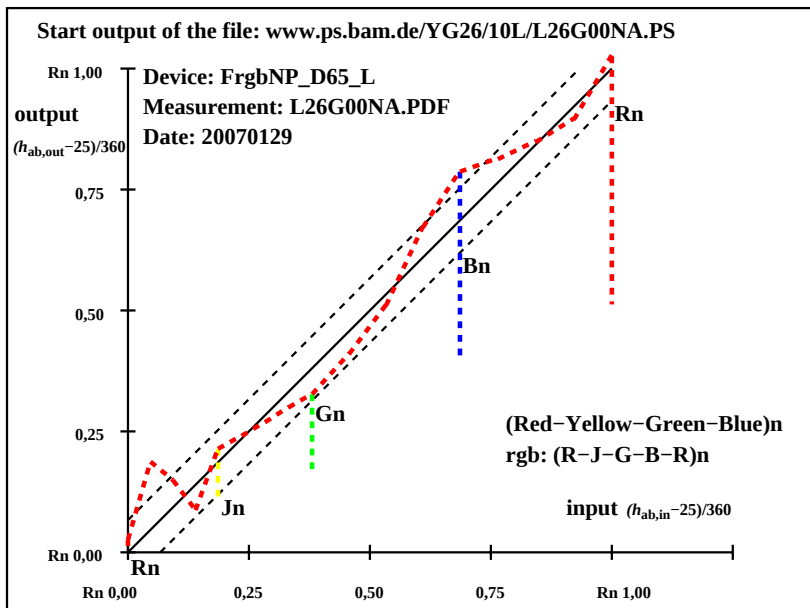

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

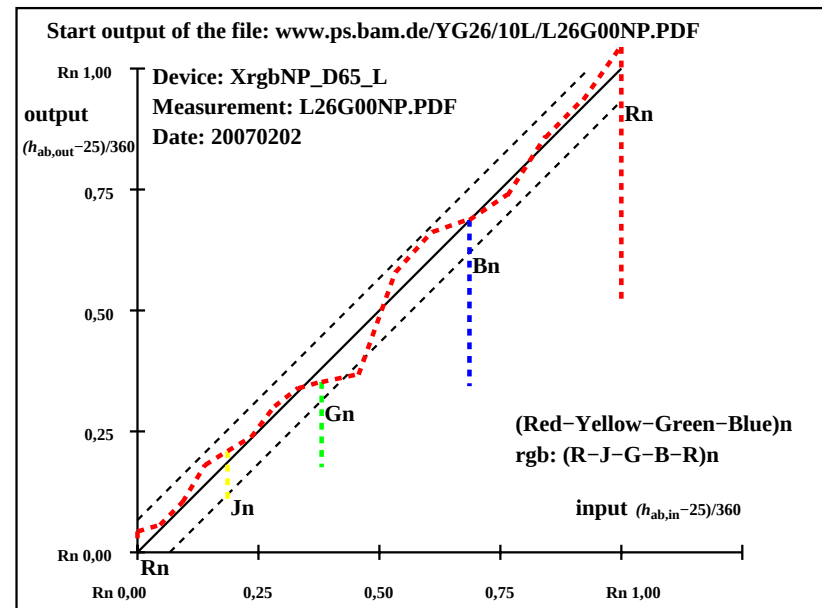

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202