

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*
N	1	9.1	0.0	0.2	90	9.1	0.0
	2	14.4	0.0	0.2	90	14.6	0.3
	3	19.6	0.0	0.2	90	21.7	-0.4
	4	24.8	0.0	0.2	90	28.4	-1.8
	5	30.0	0.0	0.2	90	35.5	-2.1
	6	35.3	0.0	0.1	90	41.3	-2.6
	7	40.5	0.0	0.1	90	46.8	-2.6
	8	45.7	0.0	0.1	90	52.9	-3.7
Z	9	51.0	0.0	0.1	90	58.3	-3.7
	10	56.2	0.0	0.1	90	63.8	-3.2
	11	61.4	0.0	0.1	90	69.8	-1.8
	12	66.7	0.0	0.1	90	75.6	-0.8
	13	71.9	0.0	0.1	90	81.6	0.0
	14	77.1	0.0	0.0	90	87.1	0.0
	15	82.3	0.0	0.0	90	92.1	-0.6
	16	87.6	0.0	0.0	90	92.9	0.0
W	17	92.8	0.0	0.0	0	92.8	0.0
N	18	9.1	0.0	0.2	90	9.1	0.0
	19	30.0	0.0	0.2	90	35.5	-2.1
Z	20	51.0	0.0	0.1	90	58.3	-3.7
	21	71.9	0.0	0.1	90	81.6	0.0
W	22	92.8	0.0	0.0	0	92.8	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.81 - 9.12$
Regularity
 $g^* = 42.5$
Lightness gamut relative to offset
 $f^* = 108.1$
Black - White
cmY0: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.1$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 1.7$
 $\Delta E^*_{CIELAB} = 4.9$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*
N	1	26.9	0.0	0.0	0	26.9	0.0
	2	31.2	0.0	0.0	0	29.2	-0.6
	3	35.5	0.0	0.0	0	31.4	-1.5
	4	39.8	0.0	0.0	0	34.1	-1.7
	5	44.1	0.0	0.0	0	36.2	-1.9
	6	48.3	0.0	0.0	0	38.8	-1.7
	7	52.6	0.0	0.0	0	42.6	-1.3
	8	56.9	0.0	0.0	0	47.3	-2.5
Z	9	61.2	0.0	0.0	0	51.9	-1.7
	10	65.5	0.0	0.0	0	56.7	-1.3
	11	69.7	0.0	0.0	0	61.3	-0.7
	12	74.0	0.0	0.0	0	65.4	-0.8
	13	78.3	0.0	0.0	0	70.0	-0.3
	14	82.6	0.0	0.0	0	75.3	-0.1
	15	86.9	0.0	0.0	0	80.8	-1.2
	16	91.1	0.0	0.0	0	85.1	0.3
W	17	95.4	0.0	0.0	0	95.4	0.0
N	18	26.9	0.0	0.0	0	26.9	0.0
	19	44.1	0.0	0.0	0	36.2	-1.9
Z	20	61.2	0.0	0.0	0	51.9	-1.7
	21	78.3	0.0	0.0	0	70.0	-0.3
W	22	95.4	0.0	0.0	0	95.4	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.41 - 26.94$
Regularity
 $g^* = 36.6$
Lightness gamut relative to offset
 $f^* = 88.5$
Black - White
cmY0: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.9$
 $\Delta E^*_{CIELAB} = 7.7$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.1$
 $\Delta E^*_{CIELAB} = 6.0$
Mean colour reproduction index: $R^*_{ab,m} = 66$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

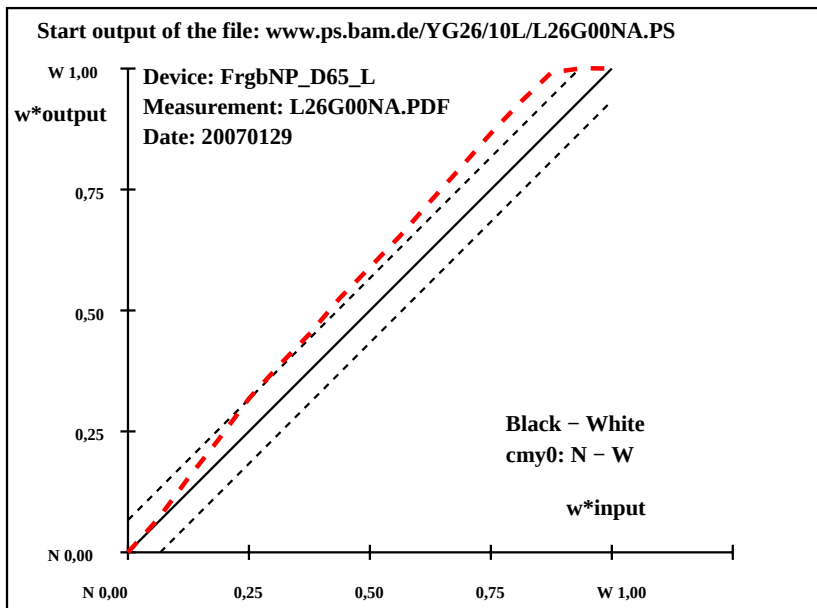

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

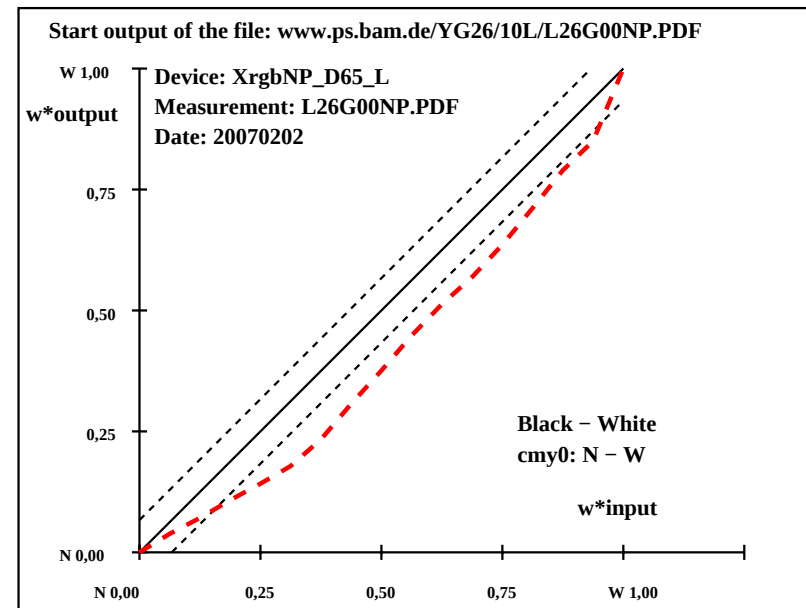

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202