


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH* ΔE*	Start output S1								
R	1	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0	10.3	10.3	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G	
	2	50.5	52.8	47.1	42	47.0	58.3	45.9	38	-3.4	5.5	-1.1	5.6	6.6		
	3	59.3	37.6	61.3	58	56.4	41.7	62.8	56	-2.8	4.1	1.5	4.4	5.2		
	4	69.2	20.4	77.4	75	75.9	7.2	90.6	85	6.7	-13.1	13.2	18.6	19.8		
J	5	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0		
	6	77.6	-31.8	90.0	110	76.6	-31.4	88.0	110	-0.9	0.4	-1.9	2.0	2.2		
	7	62.6	-48.6	64.6	127	55.6	-54.4	52.3	136	-6.9	-5.7	-12.2	13.6	15.3		
	8	50.5	-62.0	44.3	145	48.6	-63.3	41.1	147	-1.8	-1.2	-3.1	3.5	3.9		
G	9	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3	Red-Yellow-Green-Blue rgb: R-J-G-B-R	
	10	48.4	-42.2	-7.0	190	48.2	-64.4	35.9	151	0.0	-22.1	43.0	48.4	48.4		
C	11	49.4	-32.2	-24.2	217	52.1	-16.3	-52.3	253	2.6	15.9	-28.0	32.3	32.4		Mean CIELAB difference (17 steps)
	12	50.6	-20.8	-43.7	245	46.0	-7.1	-50.1	262	-4.5	13.7	-6.3	15.1	15.8		
B	13	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0	Mean CIELAB difference (5 steps)	
	14	40.5	21.6	-36.9	300	33.5	19.1	-43.3	294	-6.9	-2.4	-6.3	6.8	9.8		
M	15	42.7	41.0	-25.0	329	46.2	71.5	-6.1	355	3.5	30.5	18.9	35.9	36.1		ΔH* _{CIELAB} = 14.6 ΔE* _{CIELAB} = 15.7
	16	46.1	70.7	-3.9	357	46.0	67.5	7.0	6	0.0	-3.1	11.0	11.5	11.5		
R	17	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4		
	18	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0	10.3	10.3		
J	19	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0		Mean CIELAB difference (5 steps)
G	20	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3		
	21	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0		
B	22	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4		
	23	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4		


YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref		hab,ref		LAB*a,out		hab,out		LAB*a,out-ref		ΔH* ΔE*		Start output S1	
R	1	46.5	61.0	28.4	25	48.0	58.0	45.8	38	1.5	-2.9	17.4	17.6	17.7	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	48.5	56.3	50.2	42	55.5	43.9	55.7	52	7.0	-12.3	5.5	13.5	15.2	
	3	58.2	39.6	64.6	58	65.4	25.9	70.2	70	7.2	-13.6	5.6	14.8	16.4	
	4	68.8	21.1	80.3	75	77.5	4.3	90.4	87	8.7	-16.7	10.1	19.6	21.5	
J	5	83.0	-3.4	101.4	92	90.8	-17.0	112.2	99	7.8	-13.5	10.8	17.3	19.0	
	6	77.8	-31.2	88.3	110	77.8	-26.2	88.0	107	0.0	5.0	-0.2	5.0	5.0	
	7	64.0	-46.6	61.9	127	66.4	-33.3	62.8	118	2.4	13.3	0.9	13.3	13.5	
G	8	53.5	-58.4	41.7	145	59.1	-46.7	45.4	136	5.6	11.7	3.7	12.3	13.5	
	9	50.3	-54.5	17.7	162	50.5	-60.9	32.9	152	0.3	-6.3	15.2	16.5	16.5	
	10	52.5	-40.0	-6.6	190	53.3	-43.5	-7.3	190	0.8	-3.4	-0.6	3.6	3.7	
C	11	54.0	-30.4	-22.9	217	57.2	-20.4	-40.0	243	3.3	10.0	-17.0	19.8	20.1	Red–Yellow–Green–Blue cmy0: R–J–G–B–R
	12	55.6	-19.6	-41.1	245	44.0	-5.1	-34.8	262	-11.6	14.5	6.3	15.8	19.6	
B	13	40.2	1.3	-38.4	272	27.6	19.1	-35.6	298	-12.6	17.8	2.8	18.0	22.0	
	14	25.8	20.8	-35.5	300	36.4	42.4	-24.9	329	10.6	21.6	10.6	24.1	26.3	
M	15	34.2	38.0	-23.2	329	47.8	61.3	-5.5	355	13.5	23.3	17.7	29.3	32.2	Mean CIELAB difference (17 steps)
	16	46.9	62.5	-3.4	357	48.0	60.4	18.5	17	1.1	-2.0	22.0	22.2	22.2	
R	17	46.5	61.0	28.4	25	47.1	59.6	44.4	37	0.6	-1.3	16.0	16.0	16.0	ΔH* _{CIELAB} = 15.4 ΔE* _{CIELAB} = 17.7
	18	46.5	61.0	28.4	25	48.0	58.0	45.8	38	1.5	-2.9	17.4	17.6	17.7	
J	19	83.0	-3.4	101.4	92	90.8	-17.0	112.2	99	7.8	-13.5	10.8	17.3	19.0	
G	20	50.3	-54.5	17.7	162	50.5	-60.9	32.9	152	0.3	-6.3	15.2	16.5	16.5	
B	21	40.2	1.3	-38.4	272	27.6	19.1	-35.6	298	-12.6	17.8	2.8	18.0	22.0	Mean CIELAB difference (5 steps) ΔH* _{CIELAB} = 13.9 ΔE* _{CIELAB} = 18.3
	22	46.5	61.0	28.4	25	47.1	59.6	44.4	37	0.6	-1.3	16.0	16.0	16.0	

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

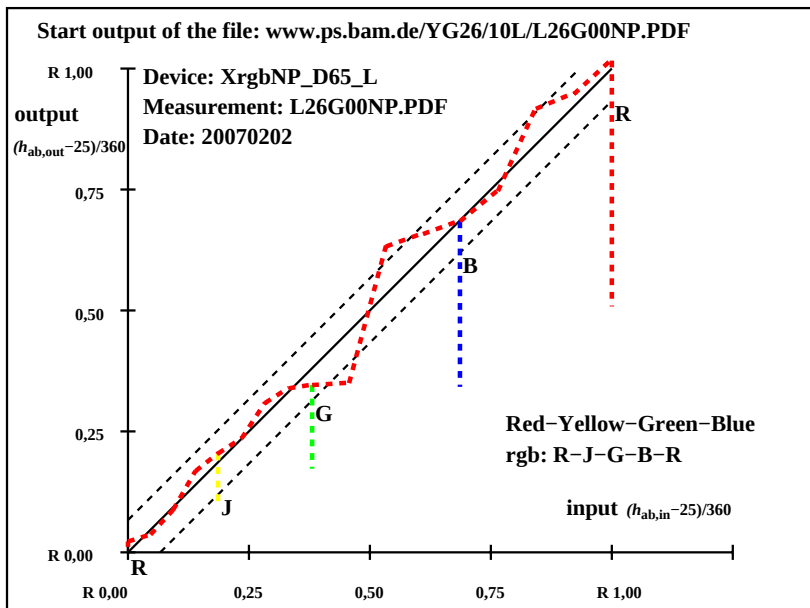

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

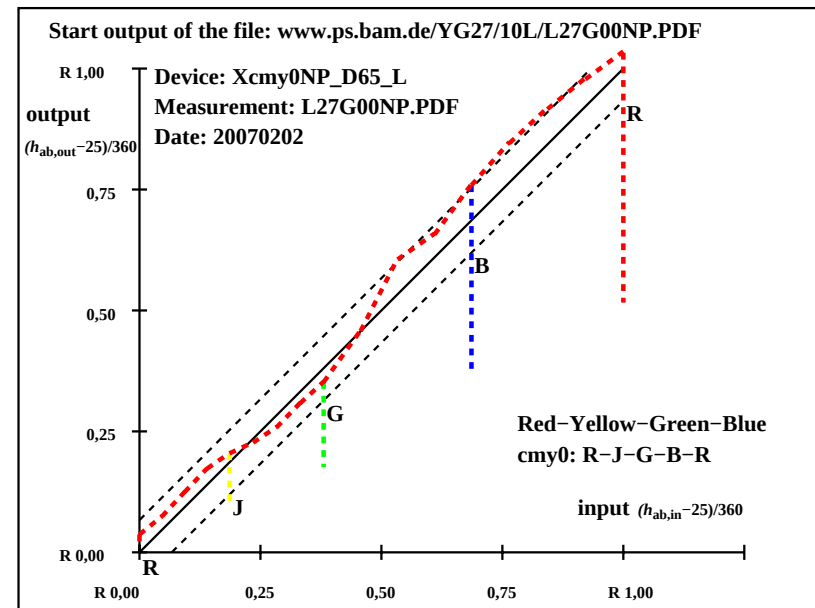

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202