

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH* ΔE*	Start output S1					
R	1	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8	15.1	15.2	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G	
	2	36.1	26.4	23.6	42	36.9	30.7	31.1	45	0.8	4.3	7.5	8.7	8.7		
	3	40.5	18.8	30.7	58	41.3	20.1	38.2	62	0.8	1.3	7.5	7.6	7.7		
	4	45.5	10.2	38.7	75	51.7	0.1	54.2	90	6.2	-10.0	15.5	18.5	19.5		
J	5	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1	19.1	20.4	(Red-Yellow-Green-Blue)n rgb: (R-J-G-B-R)n	
	6	49.6	-15.8	45.0	110	55.0	-21.3	57.0	111	5.4	-5.4	12.0	13.2	14.2		
	7	42.1	-24.2	32.3	127	45.6	-37.7	39.7	134	3.5	-13.4	7.4	15.4	15.7		
	8	36.1	-31.0	22.2	145	40.7	-47.2	30.7	147	4.6	-16.1	8.5	18.3	18.9		
G	9	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6	27.7	28.0	Mean CIELAB difference (17 steps) ΔH* _{CIELAB} = 15.3 ΔE* _{CIELAB} = 16.6	
	10	35.0	-21.1	-3.4	190	33.8	-38.0	16.0	157	-1.1	-16.8	19.5	25.9	25.9		
C'	11	35.5	-16.0	-12.1	217	37.0	-19.8	-26.7	233	1.4	-3.7	-14.5	15.1	15.2		Mean CIELAB difference (5 steps) ΔH* _{CIELAB} = 14.3 ΔE* _{CIELAB} = 17.6
	12	36.1	-10.4	-21.8	245	32.2	-4.0	-35.3	263	-3.9	6.4	-13.4	14.9	15.4		
B	13	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5	9.6	9.8		
	14	31.1	10.8	-18.4	300	26.0	15.0	-40.0	291	-4.9	4.2	-21.5	22.0	22.6		
M	15	32.2	20.5	-12.4	329	30.4	41.8	-20.6	334	-1.7	21.3	-8.1	22.8	22.9		
	16	33.9	35.4	-1.9	357	31.8	40.2	1.2	2	-2.0	4.8	3.2	5.8	6.2		
R	17	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0	15.2	15.4		
	18	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8	15.1	15.2		
J	19	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1	19.1	20.4		
G	20	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6	27.7	28.0		
B	21	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5	9.6	9.8		
	22	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0	15.2	15.4		

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202


T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH^*		ΔE^*		Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
R	1	36.7	30.5	14.2	25	39.2	34.5	20.8	31	2.4	4.0	6.6	7.7	
	2	37.7	28.1	25.1	42	42.0	25.1	27.0	47	4.3	-2.9	1.9	3.6	5.6
	3	42.5	19.8	32.3	58	45.8	14.1	34.7	68	3.2	-5.6	2.4	6.2	7.0
	4	47.9	10.6	40.1	75	50.3	2.2	42.4	87	2.4	-8.3	2.3	8.7	9.0
J	5	55.0	-1.7	50.7	92	53.5	-8.0	48.6	99	-1.4	-6.2	-2.0	6.7	6.8
	6	52.4	-15.5	44.1	110	49.7	-15.8	40.0	112	-2.5	-0.2	-4.0	4.1	4.9
	7	45.5	-23.2	31.0	127	46.5	-22.8	32.1	126	1.0	0.4	1.1	1.2	1.6
	8	40.2	-29.1	20.9	145	43.1	-29.3	24.1	141	2.9	-0.1	3.2	3.2	4.3
G	9	38.6	-27.2	8.9	162	40.3	-35.3	15.4	156	1.7	-8.0	6.5	10.4	10.6
	10	39.7	-19.9	-3.3	190	40.6	-30.5	0.0	180	0.9	-10.5	3.4	11.1	11.1
C	11	40.5	-15.1	-11.4	217	41.5	-24.3	-10.5	203	1.0	-9.1	0.9	9.2	9.3
	12	41.3	-9.7	-20.5	245	34.2	-8.9	-15.0	239	-7.0	0.8	5.5	5.6	9.0
B	13	33.6	0.7	-19.1	272	27.3	9.4	-19.1	296	-6.2	8.7	0.0	8.7	10.7
	14	26.4	10.4	-17.7	300	30.8	21.9	-14.1	327	4.4	11.5	3.6	12.1	12.8
M	15	30.6	19.0	-11.5	329	36.8	36.5	-3.1	355	6.2	17.5	8.4	19.4	20.4
	16	36.9	31.3	-1.7	357	36.5	35.4	6.7	11	-0.3	4.1	8.5	9.4	9.4
	17	36.7	30.5	14.2	25	37.0	34.9	18.3	28	0.2	4.4	4.1	6.0	6.0
	18	36.7	30.5	14.2	25	39.2	34.5	20.8	31	2.4	4.0	6.6	7.7	8.1
J	19	55.0	-1.7	50.7	92	53.5	-8.0	48.6	99	-1.4	-6.2	-2.0	6.7	6.8
G	20	38.6	-27.2	8.9	162	40.3	-35.3	15.4	156	1.7	-8.0	6.5	10.4	10.6
	21	33.6	0.7	-19.1	272	27.3	9.4	-19.1	296	-6.2	8.7	0.0	8.7	10.7
R	22	36.7	30.5	14.2	25	37.0	34.9	18.3	28	0.2	4.4	4.1	6.0	6.0

(Red-Yellow-Green-Blue)n
cmy0: (R-J-G-B-R)n


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.5$
 $\Delta E^*_{CIELAB} = 8.6$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.7$
 $\Delta E^*_{CIELAB} = 8.6$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

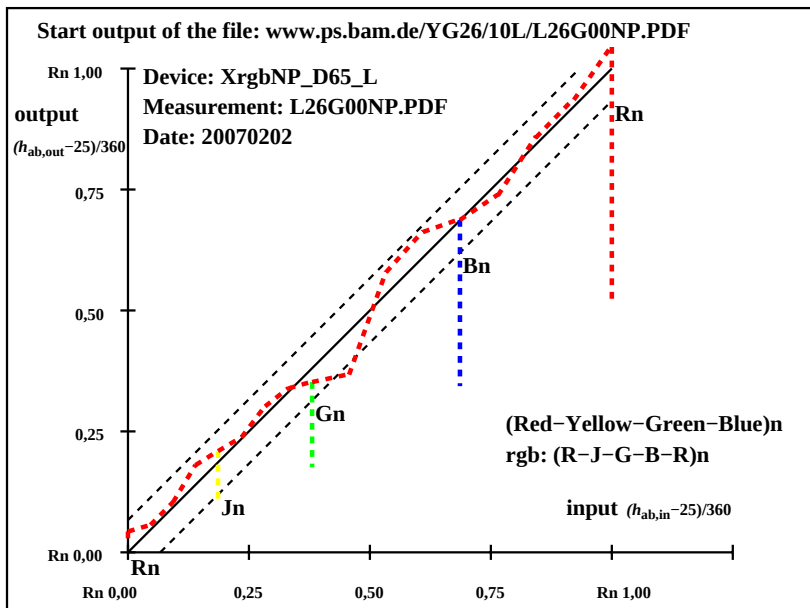

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

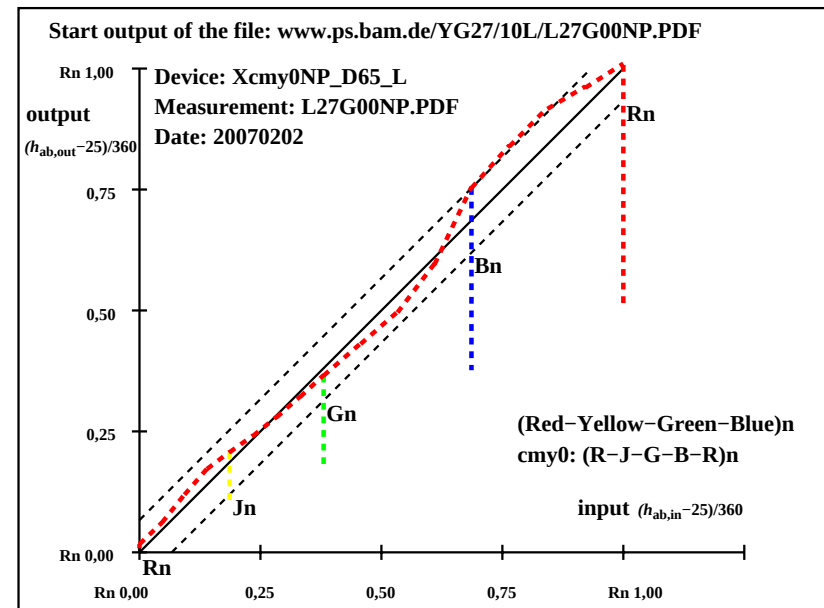

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202