


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start-Ausgabe S1							
O	1	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	49.4	56.3	37.9	34	46.3	60.2	39.3	33	-3.0	4.0	1.4	4.2	5.2	ISO/IEC 15775 Anhang G
	3	52.4	52.5	35.4	34	46.2	60.6	37.3	32	-6.2	8.1	1.9	8.3	10.4	und DIN 33866-1 Anhang G
	4	55.5	48.8	32.8	34	47.1	60.0	34.0	30	-8.3	11.3	1.2	11.3	14.1	relative CIELAB Daten für "aus"
	5	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7	ΔL* = 95.41 - 46.31
	6	61.7	41.3	27.8	34	50.7	55.6	26.0	25	-10.8	14.3	-1.7	14.5	18.1	Gleichmäßigkeit
	7	64.7	37.5	25.3	34	53.3	51.8	22.8	24	-11.3	14.3	-2.4	14.5	18.5	g* = 11.8
	8	67.8	33.8	22.7	34	56.9	46.7	20.7	24	-10.8	13.0	-1.9	13.1	17.1	
	9	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1	Helligkeitsumfang relativ zu Offset
	10	73.9	26.3	17.7	34	64.9	34.8	17.4	27	-8.9	8.5	-0.2	8.6	12.4	f* = 63.4
	11	77.0	22.5	15.2	34	70.6	27.0	14.4	28	-6.3	4.5	-0.7	4.6	7.9	
	12	80.1	18.8	12.6	34	75.6	21.2	10.6	27	-4.4	2.5	-1.9	3.2	5.5	Orangerot – Weiß
	13	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6	rgb: O – W
	14	86.2	11.3	7.6	34	84.1	11.4	6.3	29	-2.0	0.1	-1.2	1.3	2.4	
	15	89.3	7.5	5.0	34	88.4	6.7	4.0	31	-0.8	-0.7	-0.9	1.3	1.6	Mittlerer CIELAB-Abstand (17 Stufen)
	16	92.3	3.8	2.5	34	90.0	3.2	1.9	31	-2.3	-0.4	-0.5	0.8	2.5	ΔH*CIELAB = 6.6
W	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 8.9
O	18	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0	
	19	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7	
	20	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1	Mittlerer CIELAB-Abstand (5 Stufen)
	21	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6	ΔH*CIELAB = 5.3
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 7.1
Mittlerer Farbwiedergabe-Index: R*_{ab,m} = 61															


YG310-3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out/c-ref		ΔH*	ΔE*	Start-Ausgabe S1				
O	1	46.3	60.1	47.0	38	46.3	60.1	47.0	38	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach	
	2	49.4	56.3	44.1	38	48.0	57.7	46.4	39	-1.3	1.4	2.3	2.7	3.0	ISO/IEC 15775 Anhang G	
	3	52.4	52.6	41.1	38	49.4	55.6	45.1	39	-3.0	3.0	4.0	5.0	5.9	und DIN 33866-1 Anhang G	
	4	55.5	48.8	38.2	38	51.6	52.3	41.3	38	-3.8	3.5	3.1	4.7	6.1	relative CIELAB Daten für "aus"	
	5	58.6	45.1	35.3	38	53.2	49.9	39.4	38	-5.2	4.8	4.2	6.4	8.3	ΔL* = 95.3 - 46.32	
	6	61.6	41.3	32.3	38	56.0	45.6	37.5	39	-5.5	4.3	5.2	6.7	8.8	Gleichmäßigkeit	
	7	64.7	37.6	29.4	38	58.5	41.5	36.2	41	-6.0	3.9	6.8	7.9	10.0	g* = 41.7	
	8	67.7	33.8	26.4	38	62.8	34.9	35.0	45	-4.9	1.1	8.6	8.6	10.0		
	9	70.8	30.1	23.5	38	66.3	28.5	33.0	49	-4.4	-1.4	9.5	9.6	10.6	Helligkeitsumfang relativ zu Offset	
	10	73.9	26.3	20.6	38	70.3	21.3	31.9	56	-3.5	-4.9	11.3	12.4	12.9	f* = 63.3	
11	76.9	22.5	17.6	38	72.5	15.9	30.7	63	-4.3	-6.5	13.1	14.7	15.3			
12	80.0	18.8	14.7	38	75.9	10.2	28.2	70	-4.0	-8.5	13.5	16.0	16.5	Orangerot – Weiß		
13	83.1	15.0	11.8	38	78.8	7.6	21.7	71	-4.2	-7.3	10.0	12.4	13.1	cmy0: O – W		
14	86.1	11.3	8.8	38	81.9	5.3	16.2	72	-4.2	-5.9	7.4	9.5	10.4			
15	89.2	7.5	5.9	38	85.2	2.6	12.2	78	-3.9	-4.8	6.3	8.0	8.9	Mittlerer CIELAB-Abstand (17 Stufen)		
16	92.2	3.8	2.9	38	88.3	2.8	5.5	63	-3.8	-0.9	2.6	2.7	4.8	ΔH*CIELAB = 7.5		
W	17	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 8.5	
O	18	46.3	60.1	47.0	38	46.3	60.1	47.0	38	0.0	0.0	0.0	0.0	0.0		
	19	58.6	45.1	35.3	38	53.2	49.9	39.4	38	-5.2	4.8	4.2	6.4	8.3		
	20	70.8	30.1	23.5	38	66.3	28.5	33.0	49	-4.4	-1.4	9.5	9.6	10.6	Mittlerer CIELAB-Abstand (5 Stufen)	
	21	83.1	15.0	11.8	38	78.8	7.6	21.7	71	-4.2	-7.3	10.0	12.4	13.1	ΔH*CIELAB = 5.7	
	22	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 6.4	
Mittlerer Farbwiedergabe-Index: R _{ab,m} = 63																

YG311-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

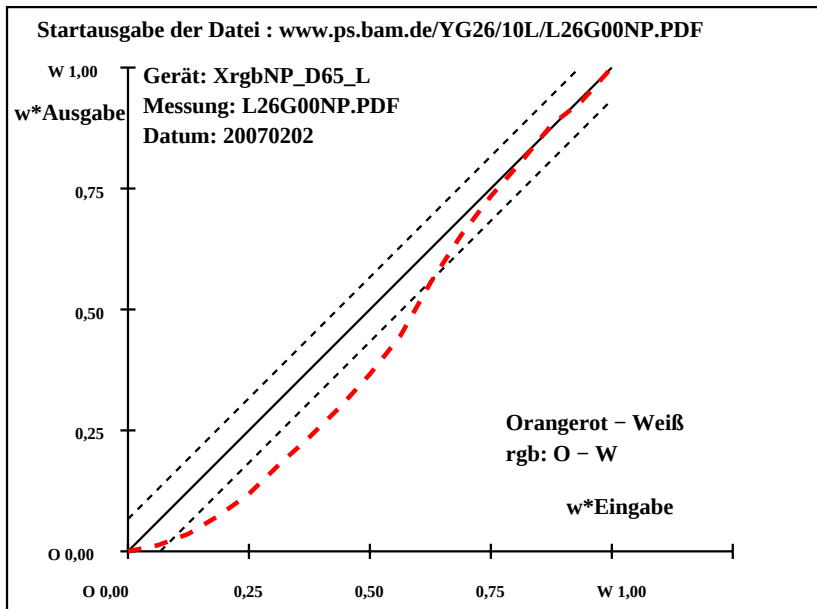

YG310-7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

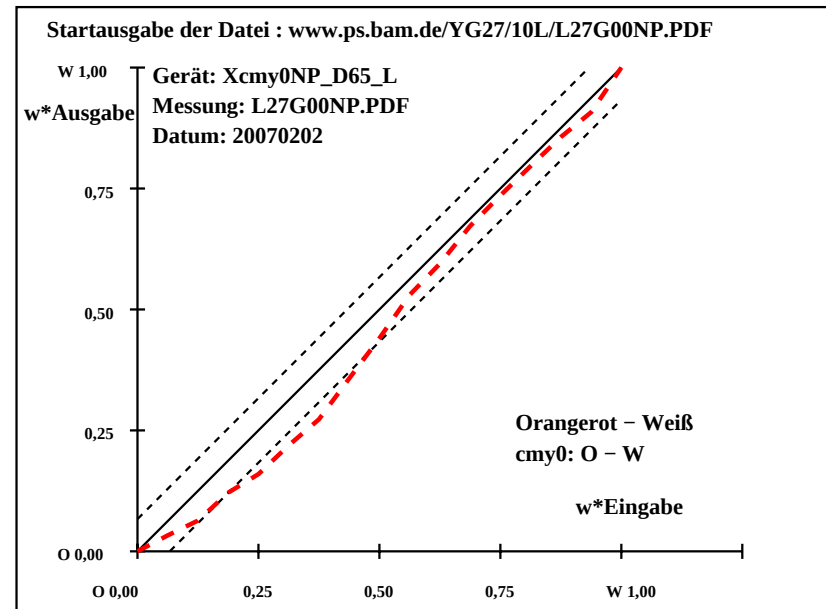

YG311-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202