


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start-Ausgabe S1				
N	1	22.6	0.2	7.1 88	22.6	0.2	7.1 88	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	27.2	0.2	6.7 88	25.1	0.3	7.2 88	-2.0	0.1	0.5	0.5	2.2	ISO/IEC 15775 Anhang G
	3	31.7	0.2	6.2 88	28.1	0.3	6.9 88	-3.5	0.1	0.7	0.7	3.7	und DIN 33866-1 Anhang G
	4	36.3	0.2	5.8 88	33.3	0.2	6.3 88	-2.9	0.0	0.5	0.5	3.0	relative CIELAB Daten für "aus"
	5	40.8	0.2	5.4 88	37.9	0.2	5.9 88	-2.8	0.1	0.5	0.5	3.0	$\Delta L^* = 95.42 - 22.63$
	6	45.4	0.1	4.9 88	43.2	0.1	5.3 89	-2.0	0.0	0.4	0.4	2.2	Gleichmäßigkeit
	7	49.9	0.1	4.5 88	47.2	0.1	4.8 89	-2.6	0.0	0.3	0.3	2.7	$g^* = 74.4$
	8	54.5	0.1	4.1 88	52.6	0.1	4.4 89	-1.8	0.0	0.3	0.3	1.9	
	9	59.0	0.1	3.7 88	58.4	0.0	3.9 90	-0.5	0.0	0.3	0.3	0.7	Helligkeitsumfang relativ zu Offset
	10	63.6	0.1	3.2 88	63.4	0.1	3.2 88	0.0	0.0	0.0	0.0	0.1	$f^* = 94.0$
Z	11	68.1	0.1	2.8 88	68.8	0.0	2.7 90	0.7	0.0	0.0	0.1	0.7	
	12	72.7	0.1	2.4 88	73.5	0.0	2.5 90	0.8	0.0	0.1	0.2	0.8	Schwarz – Weiß
	13	77.2	0.1	1.9 89	76.9	0.1	1.9 87	-0.3	0.1	0.0	0.1	0.4	000n: N – W
	14	81.8	0.0	1.5 89	81.7	0.0	1.6 90	0.0	0.0	0.1	0.1	0.1	
	15	86.3	0.0	1.1 89	85.4	0.0	1.0 90	-0.9	0.0	0.0	0.1	1.0	Mittlerer CIELAB-Abstand (17 Stufen)
	16	90.9	0.0	0.6 89	88.9	0.0	0.7 90	-1.9	0.0	0.1	0.1	2.0	$\Delta H^*_{CIELAB} = 0.2$
	17	95.4	0.0	0.2 90	95.4	0.0	0.2 90	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 1.4$
	18	22.6	0.2	7.1 88	22.6	0.2	7.1 88	0.0	0.0	0.0	0.0	0.0	
	19	40.8	0.2	5.4 88	37.9	0.2	5.9 88	-2.8	0.1	0.5	0.5	3.0	
	20	59.0	0.1	3.7 88	58.4	0.0	3.9 90	-0.5	0.0	0.3	0.3	0.7	Mittlerer CIELAB-Abstand (5 Stufen)
W	21	77.2	0.1	1.9 89	76.9	0.1	1.9 87	-0.3	0.1	0.0	0.1	0.4	$\Delta H^*_{CIELAB} = 0.2$
	22	95.4	0.0	0.2 90	95.4	0.0	0.2 90	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 0.8$
	Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 94$												


YG310-3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref		hab,ref		LAB*a,out		hab,out		LAB*a,out/c-ref		ΔH^*	ΔE^*	Start-Ausgabe S1	
N	1	22.6	0.2	7.1	88	22.6	0.2	7.1	88	0.0	0.0	0.0	0.0		Kennzeichnung nach
	2	27.2	0.2	6.7	88	25.1	0.3	7.2	88	-2.0	0.1	0.5	0.5	2.2	ISO/IEC 15775 Anhang G
	3	31.7	0.2	6.2	88	28.1	0.3	6.9	88	-3.5	0.1	0.7	0.7	3.7	und DIN 33866-1 Anhang G
	4	36.3	0.2	5.8	88	33.3	0.2	6.3	88	-2.9	0.0	0.5	0.5	3.0	relative CIELAB Daten für "aus"
	5	40.8	0.2	5.4	88	37.9	0.2	5.9	88	-2.8	0.1	0.5	0.5	3.0	$\Delta L^* = 95.42 - 22.63$
	6	45.4	0.1	4.9	88	43.2	0.1	5.3	89	-2.0	0.0	0.4	0.4	2.2	Gleichmäßigkeit
	7	49.9	0.1	4.5	88	47.2	0.1	4.8	89	-2.6	0.0	0.3	0.3	2.7	$g^* = 74.4$
	8	54.5	0.1	4.1	88	52.6	0.1	4.4	89	-1.8	0.0	0.3	0.3	1.9	
Z	9	59.0	0.1	3.7	88	58.4	0.0	3.9	90	-0.5	0.0	0.3	0.3	0.7	Helligkeitsumfang relativ zu Offset
	10	63.6	0.1	3.2	88	63.4	0.1	3.2	88	0.0	0.0	0.0	0.0	0.1	$f^* = 94.0$
	11	68.1	0.1	2.8	88	68.8	0.0	2.7	90	0.7	0.0	0.0	0.1	0.7	
	12	72.7	0.1	2.4	88	73.5	0.0	2.5	90	0.8	0.0	0.1	0.2	0.8	Schwarz – Weiß
	13	77.2	0.1	1.9	89	76.9	0.1	1.9	87	-0.3	0.1	0.0	0.1	0.4	000n: N – W
	14	81.8	0.0	1.5	89	81.7	0.0	1.6	90	0.0	0.0	0.1	0.1	0.1	
	15	86.3	0.0	1.1	89	85.4	0.0	1.0	90	-0.9	0.0	0.0	0.1	1.0	Mittlerer CIELAB-Abstand (17 Stufen)
	16	90.9	0.0	0.6	89	88.9	0.0	0.7	90	-1.9	0.0	0.1	0.1	2.0	$\Delta H^*_{CIELAB} = 0.2$
W	17	95.4	0.0	0.2	90	95.4	0.0	0.2	90	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 1.4$
N	18	22.6	0.2	7.1	88	22.6	0.2	7.1	88	0.0	0.0	0.0	0.0	0.0	
	19	40.8	0.2	5.4	88	37.9	0.2	5.9	88	-2.8	0.1	0.5	0.5	3.0	
Z	20	59.0	0.1	3.7	88	58.4	0.0	3.9	90	-0.5	0.0	0.3	0.3	0.7	Mittlerer CIELAB-Abstand (5 Stufen)
	21	77.2	0.1	1.9	89	76.9	0.1	1.9	87	-0.3	0.1	0.0	0.1	0.4	$\Delta H^*_{CIELAB} = 0.2$
W	22	95.4	0.0	0.2	90	95.4	0.0	0.2	90	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 0.8$
Mittlerer Farbwiedergabe-Index:														$R^*_{ab,m} = 94$	

YG311-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

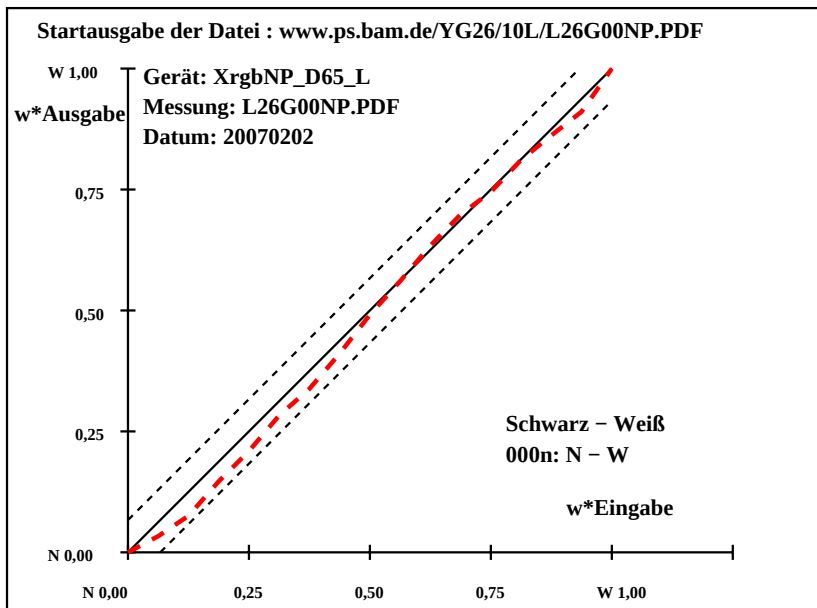

YG310-7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

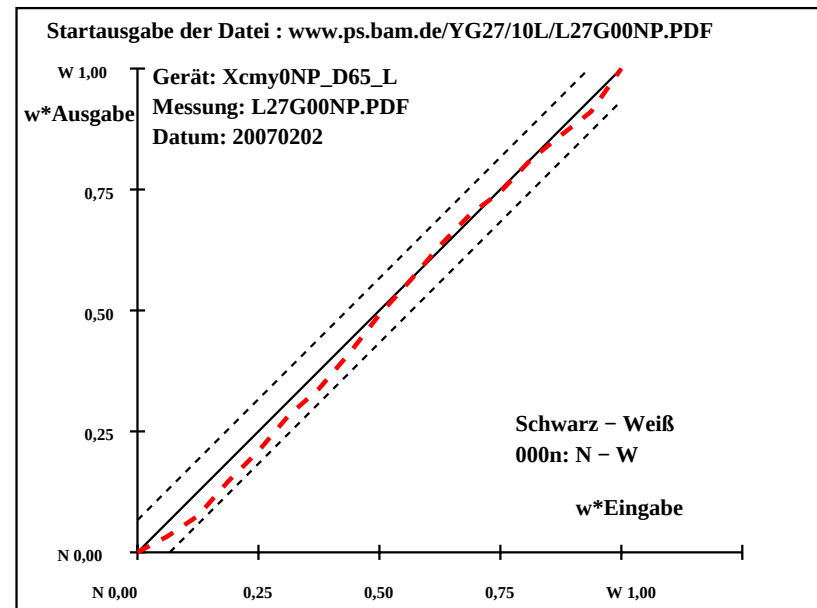

YG311-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202