


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start-Ausgabe S1							
O	1	48.3	64.0	50.4	38	48.3	64.0	50.4	38	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach	
	2	51.2	60.0	47.3	38	49.9	61.7	49.7	39	-1.2	1.7	2.5	3.0	3.3	ISO/IEC 15775 Anhang G	
	3	54.1	56.0	44.1	38	51.2	59.7	48.4	39	-2.9	3.7	4.3	5.7	6.4	und DIN 33866-1 Anhang G	
	4	57.1	52.0	41.0	38	53.2	56.4	44.4	38	-3.7	4.4	3.5	5.6	6.8	relative CIELAB Daten für "aus"	
	5	60.0	48.0	37.8	38	54.8	54.1	42.5	38	-5.1	6.1	4.7	7.7	9.3	$\Delta L^* = 95.23 - 48.25$	
	6	62.9	44.0	34.7	38	57.5	49.8	40.2	39	-5.4	5.8	5.5	8.0	9.7	Gleichmäßigkeit	
	7	65.9	40.0	31.5	38	59.9	45.7	38.8	40	-5.9	5.7	7.3	9.3	11.0	$g^* = 40.8$	
	8	68.8	36.0	28.4	38	63.9	39.2	37.2	44	-4.8	3.2	8.9	9.4	10.6		
	9	71.7	32.0	25.2	38	67.3	32.7	34.9	47	-4.3	0.7	9.7	9.7	10.7	Helligkeitsumfang relativ zu Offset	
	10	74.7	28.0	22.1	38	71.1	25.4	33.5	53	-3.4	-2.5	11.4	11.7	12.3	$f^* = 60.7$	
	11	77.6	24.0	18.9	38	73.2	19.8	31.9	58	-4.3	-4.1	13.0	13.7	14.4		
	12	80.5	20.0	15.8	38	76.4	13.8	29.1	65	-4.0	-6.1	13.4	14.7	15.3	Orangerot – Weiß	
	13	83.5	16.0	12.6	38	79.2	10.5	22.5	65	-4.2	-5.4	9.9	11.3	12.1	rgb: O – W	
	14	86.4	12.0	9.5	38	82.1	7.5	16.8	66	-4.2	-4.4	7.3	8.6	9.6		
	15	89.4	8.0	6.3	38	85.4	4.2	12.6	72	-3.9	-3.7	6.3	7.4	8.4	Mittlerer CIELAB-Abstand (17 Stufen)	
	16	92.3	4.0	3.2	38	88.4	3.7	5.7	57	-3.8	-0.2	2.5	2.6	4.7	$\Delta H^*_{CIELAB} = 7.6$	
	W	17	95.2	0.0	0.0	0	95.2	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 8.5$
O	18	48.3	64.0	50.4	38	48.3	64.0	50.4	38	0.0	0.0	0.0	0.0	0.0		
	19	60.0	48.0	37.8	38	54.8	54.1	42.5	38	-5.1	6.1	4.7	7.7	9.3		
	20	71.7	32.0	25.2	38	67.3	32.7	34.9	47	-4.3	0.7	9.7	9.7	10.7	Mittlerer CIELAB-Abstand (5 Stufen)	
	21	83.5	16.0	12.6	38	79.2	10.5	22.5	65	-4.2	-5.4	9.9	11.3	12.1	$\Delta H^*_{CIELAB} = 5.8$	
	22	95.2	0.0	0.0	0	95.2	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 6.4$	
Mittlerer Farbwiedergabe-Index:										$R^*_{ab,m} = 63$						


YG320-3N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref			hab,ref	LAB*a,out			hab,out	LAB*a,out/c-ref			ΔH^*	ΔE^*															
O	1	46.3	60.1	47.0	38	46.3	60.1	47.0	38	0.0	0.0	0.0	0.0	0.0	Start-Ausgabe S1														
	2	49.4	56.3	44.1	38	48.0	57.7	46.4	39	-1.3	1.4	2.3	2.7	3.0	Kennzeichnung nach														
	3	52.4	52.6	41.1	38	49.4	55.6	45.1	39	-3.0	3.0	4.0	5.0	5.9	ISO/IEC 15775 Anhang G														
	4	55.5	48.8	38.2	38	51.6	52.3	41.3	38	-3.8	3.5	3.1	4.7	6.1	und DIN 33866-1 Anhang G														
	5	58.6	45.1	35.3	38	53.2	49.9	39.4	38	-5.2	4.8	4.2	6.4	8.3	relative CIELAB Daten für "aus"														
	6	61.6	41.3	32.3	38	56.0	45.6	37.5	39	-5.5	4.3	5.2	6.7	8.8	$\Delta L^* = 95.3 - 46.32$														
	7	64.7	37.6	29.4	38	58.5	41.5	36.2	41	-6.0	3.9	6.8	7.9	10.0	Gleichmäßigkeit														
	8	67.7	33.8	26.4	38	62.8	34.9	35.0	45	-4.9	1.1	8.6	8.6	10.0	$g^* = 41.7$														
	9	70.8	30.1	23.5	38	66.3	28.5	33.0	49	-4.4	-1.4	9.5	9.6	10.6	Helligkeitsumfang relativ zu Offset														
	10	73.9	26.3	20.6	38	70.3	21.3	31.9	56	-3.5	-4.9	11.3	12.4	12.9	$f^* = 63.3$														
W	11	76.9	22.5	17.6	38	72.5	15.9	30.7	63	-4.3	-6.5	13.1	14.7	15.3	Orangerot – Weiß														
	12	80.0	18.8	14.7	38	75.9	10.2	28.2	70	-4.0	-8.5	13.5	16.0	16.5	cmy0: O – W														
	13	83.1	15.0	11.8	38	78.8	7.6	21.7	71	-4.2	-7.3	10.0	12.4	13.1	Mittlerer CIELAB-Abstand (17 Stufen)														
	14	86.1	11.3	8.8	38	81.9	5.3	16.2	72	-4.2	-5.9	7.4	9.5	10.4	$\Delta H^*_{CIELAB} = 7.5$														
	15	89.2	7.5	5.9	38	85.2	2.6	12.2	78	-3.9	-4.8	6.3	8.0	8.9	$\Delta E^*_{CIELAB} = 8.5$														
	16	92.2	3.8	2.9	38	88.3	2.8	5.5	63	-3.8	-0.9	2.6	2.7	4.8															
	17	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0															
	O	18	46.3	60.1	47.0	38	46.3	60.1	47.0	38	0.0	0.0	0.0	0.0	0.0														
		19	58.6	45.1	35.3	38	53.2	49.9	39.4	38	-5.2	4.8	4.2	6.4	8.3														
		20	70.8	30.1	23.5	38	66.3	28.5	33.0	49	-4.4	-1.4	9.5	9.6	10.6	Mittlerer CIELAB-Abstand (5 Stufen)													
21		83.1	15.0	11.8	38	78.8	7.6	21.7	71	-4.2	-7.3	10.0	12.4	13.1	$\Delta H^*_{CIELAB} = 5.7$														
22		95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 6.4$														
										Mittlerer Farbwiedergabe-Index:										$R^*_{ab,m} = 63$									

YG321-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

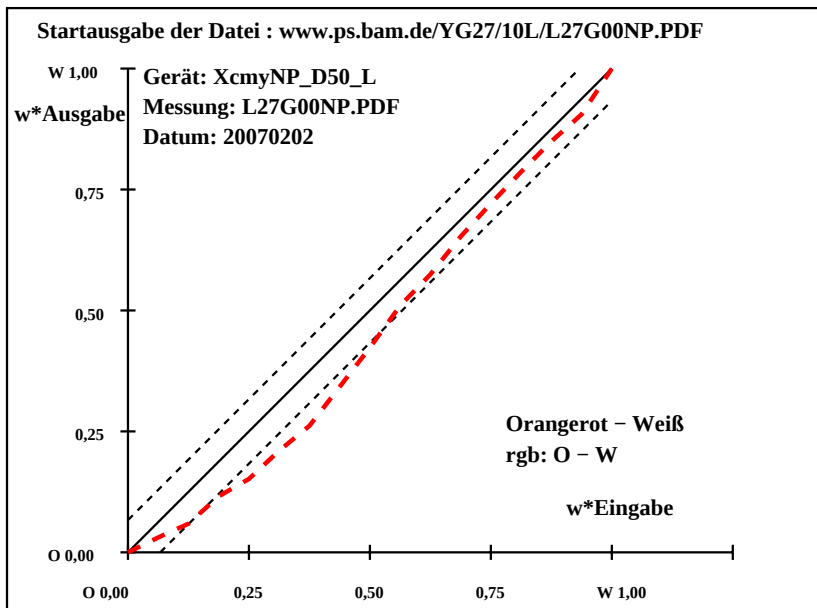

YG320-7N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

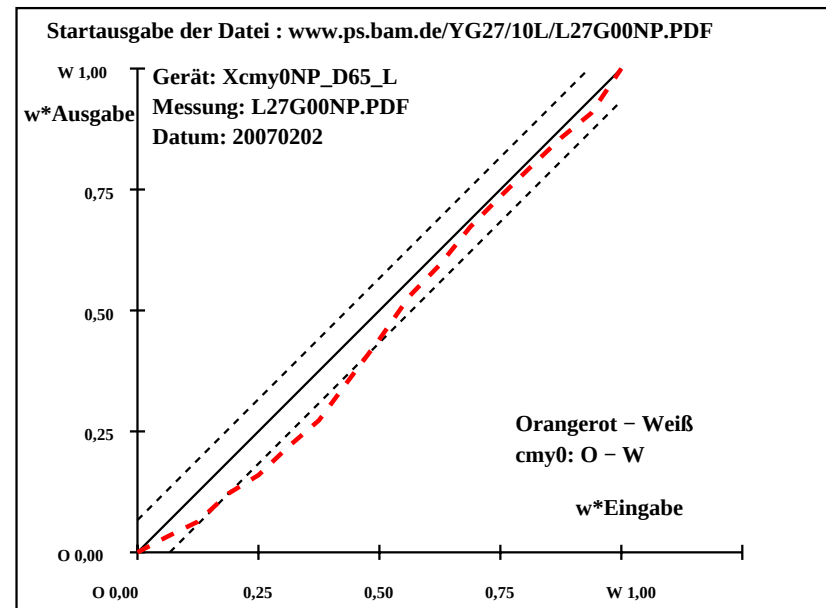

YG321-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202