



see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 1/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 1/24
F: 3D-linearization AE06/AE06LF0NX.PDF / .PS in file (F)

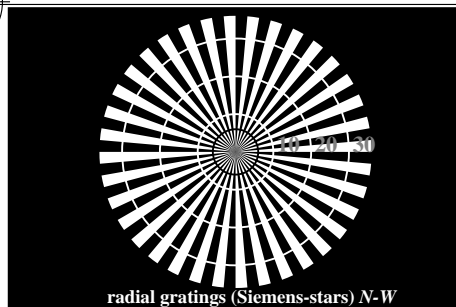


radial gratings (Siemens-stars) N-W

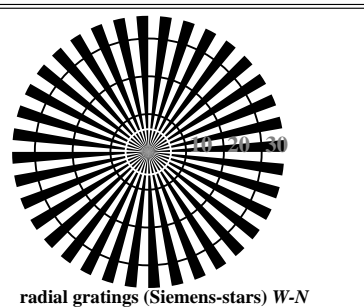

radial gratings (Siemens-stars) W-N

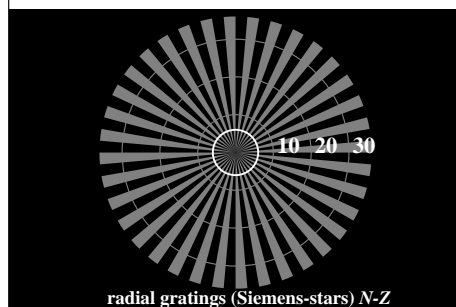

radial gratings (Siemens-stars) N-Z

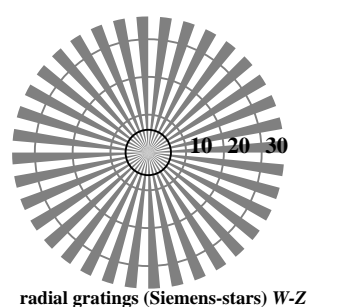

radial gratings (Siemens-stars) W-Z

AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended} (absolute)	18,0/2,5	37,3/9,7	56,7/24,6	76,0/49,8	95,4/88,5	N_0 (min.)	W_1 (max.)
$w^* = I^*_{\text{CIELAB}, r}$ (relative)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended} (absolute)	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,8	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
No. and Hex code	00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
$w^* = I^*_{\text{CIELAB}, r}$ (relative)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*



Test chart AE06 according to ISO 9241-306
achromatic test chart N

background step	0	1	ring step	0-1
Hex code	7	8	Hex code	7-8
E		F	E-F	
2		0	2-0	
8		6	8-6	
F		D	F-D	

Landolt-rings W-N

code: background - ring

AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi


AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*



TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=th4ta



see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 2/24
 technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT> /PS



<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 2/24
 F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)

Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}

Are the 5 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}

Are the 16 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

part 1, AE060-3de: 11001

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_1.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_1.PS **underline: Yes/No**

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: underline: monitor/data projector/printer

Device model, driver and version:.....

output with PDF/PS-file: underline: PDF/PS file


For output with PDF file AE06F0PX_CYN8_1.PDF
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN8_1.PS
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)


part 3, AE060-7de: 11001

Form A: Test chart AE06 according to ISO 9241-306
 achromatic test chart N



TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
 application for measurement or viewing of display and print output

TUB material: code=th4ta



Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

part 2, AE061-3de: 11001

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline: Yes/No**
 either according to DIN 6160:1996 with Anomaloskop of Nagel **underline: Yes/unknown**
 or with test charts using colour points according to Ishihara **underline: Yes/unknown**
 or tested with, please specify: **underline: Yes/unknown**

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline: Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_3.PS **underline: Yes/No**

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 **underline: Yes/No**

*Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN8_3.PS **underline: Yes/No**

picture A7_{de} or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline: Yes/No**
 If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
 Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer
 of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline: Yes/No**
 If No, please describe other method:

part 4, AE061-7de: 11001

input: *rgb/cmy0/000n/w set...*
 output: *->rgb_{de} setrgbcolor*

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 3/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE06F0NX.PDF> in file (F)

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	0,00	0,00	0,00	0,00	0,01
2	6,36	0,00	0,06	0,00	0,01
3	12,72	0,00	0,13	0,00	0,01
4	19,08	0,00	0,20	0,00	0,01
5	25,44	0,00	0,26	0,00	0,01
6	31,80	0,00	0,33	0,00	0,01
7	38,16	0,00	0,40	0,00	0,01
8	44,52	0,00	0,46	0,00	0,01
9	50,88	0,00	0,53	0,00	0,01
10	57,24	0,00	0,60	0,00	0,01
11	63,60	0,00	0,66	0,00	0,01
12	69,96	0,00	0,73	0,00	0,01
13	76,32	0,00	0,80	0,00	0,01
14	82,68	0,00	0,86	0,00	0,01
15	89,04	0,00	0,93	0,00	0,01
16	95,41	0,00	1,00	0,00	0,01
17	0,00	0,00	0,00	0,00	0,01
18	23,85	0,00	0,25	0,00	0,01
19	47,70	0,00	0,50	0,00	0,01
20	71,55	0,00	0,75	0,00	0,01
21	95,41	0,00	1,00	0,00	0,01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference
(16 steps)
ΔE*_{CIELAB} = 0,0

Mean lightness difference
(5 steps)
ΔL*_{CIELAB} = 0,0

Mean colour reproduction index: R*_{ab,m} = 99,9

part 1,

AE060-3de: 11002

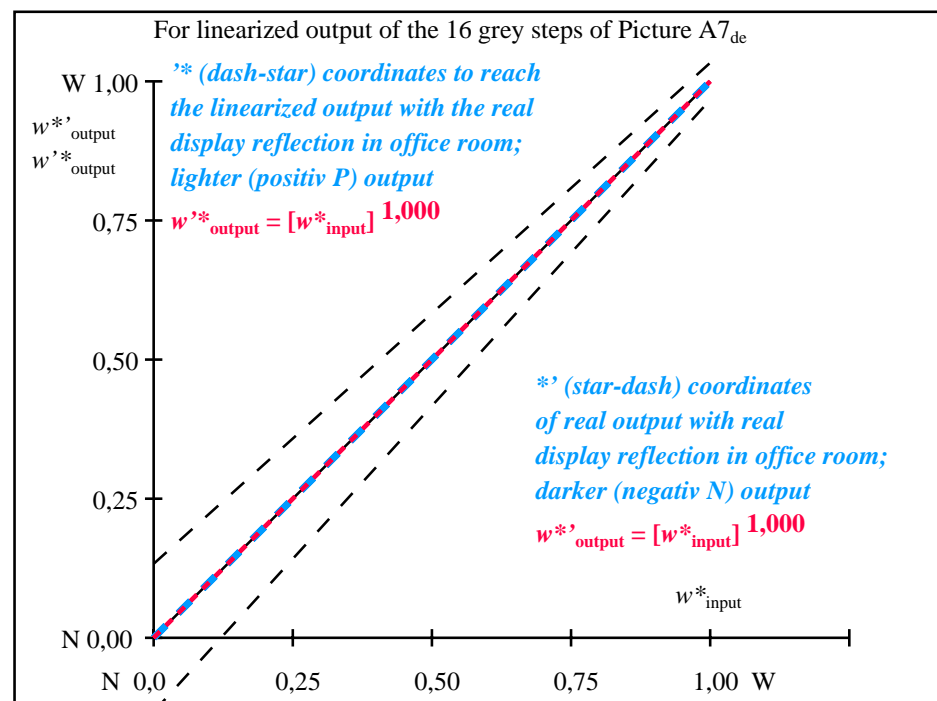

part 2,

AE061-3de: 11002

L*/Y _{intended} (absolute)	0,0/0,0	6,3/0,7	12,7/1,5	19,0/2,7	25,4/4,5	31,8/6,9	38,1/10,1	44,5/14,2	50,8/19,1	57,2/25,1	63,6/32,3	69,9/40,7	76,3/50,4	82,6/61,5	89,0/74,2	95,4/88,5
0 0 0 n* setcmyk gp=1,000 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
w* = l* CIELAB, r (relative)	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w* _{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w* _{output}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

part 3, picture A7_{de}: 16 visual equidistant L*-grey steps; PS operator: 0 0 0 n* setcmykcolor

AE060-7de: 11002


In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast Y_W: Y_N=88,9:0,31; Y_N-range 0,0 to <0,46

input: rgb/cmy0/000n/w set...
output: ->rgb_{de} setrgbcolor


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 4/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

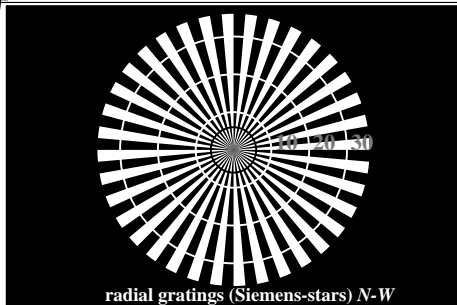


radial gratings (Siemens-stars) N-W



radial gratings (Siemens-stars) W-N

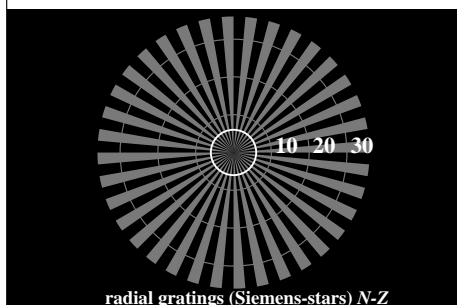


radial gratings (Siemens-stars) N-Z




radial gratings (Siemens-stars) W-Z

AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

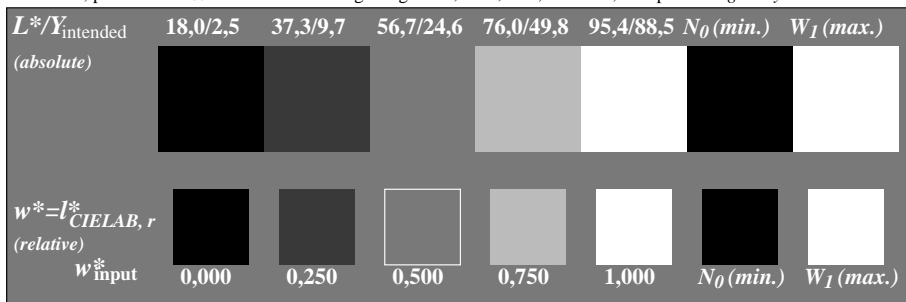


AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

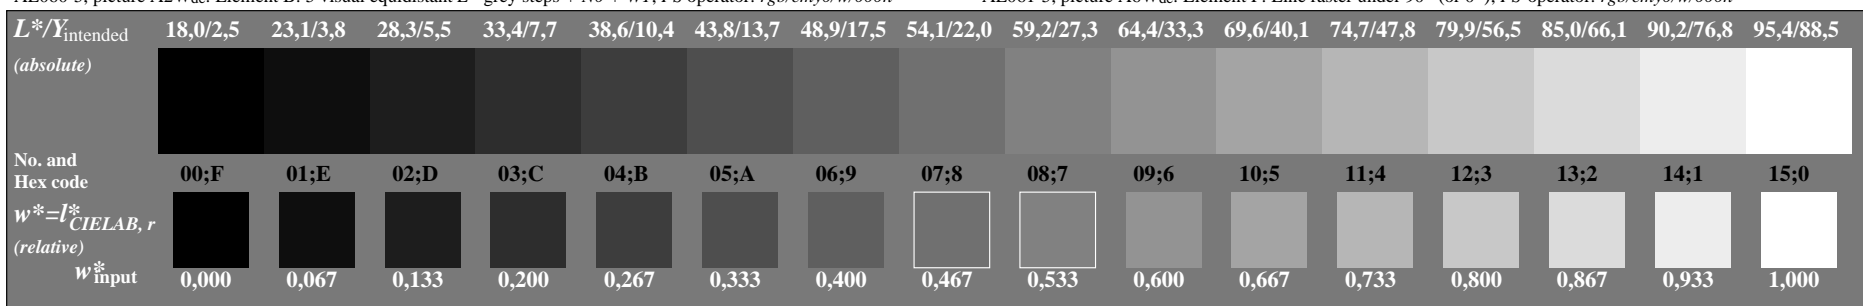


AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*




Test chart AE06 according to ISO 9241-306
achromatic test chart N

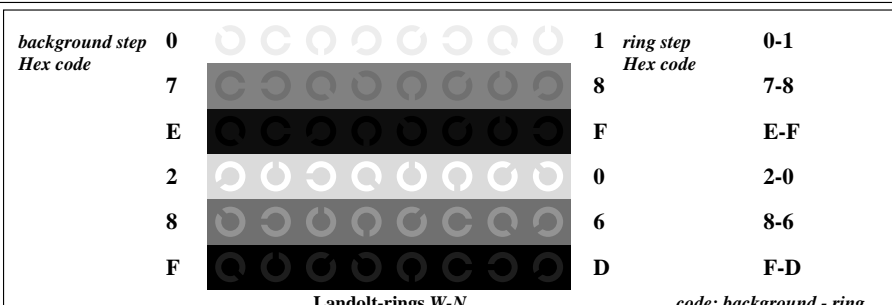


AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

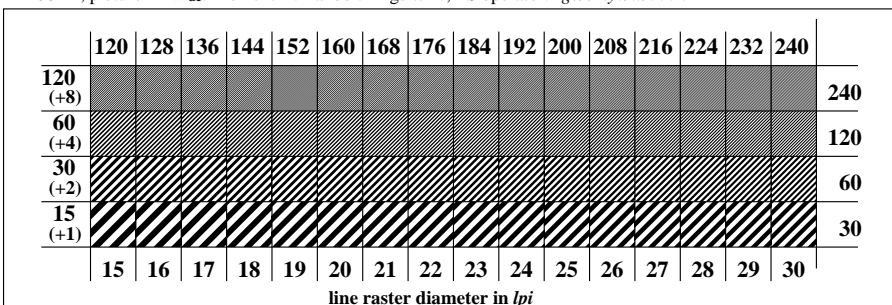

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

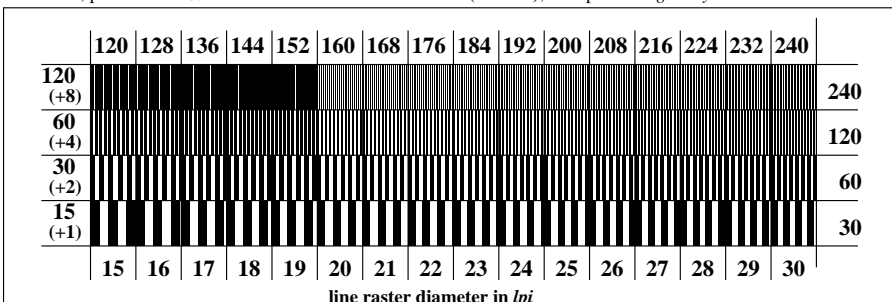


AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

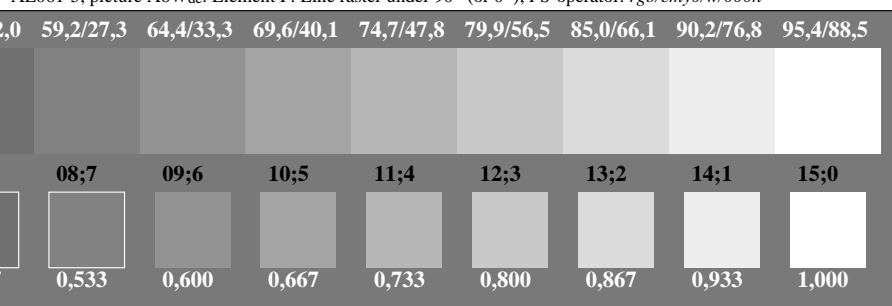


input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*






see similar files: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_1.PDF
 technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_1.PDF




<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 5/24
 F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)



TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
 application for measurement or viewing of display and print output

TUB material: code=th4ta



Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline **Yes/No**
Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}
 Are the 5 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}
 Are the 16 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

part 1, AE060-3de: 11081

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_1.PDF **underline: Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_1.PS **underline: Yes/No**

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: **underline: monitor/data projector/printer**
 Device model, driver and version:.....

output with PDF/PS-file: **underline: PDF/PS file**

For output with PDF file AE06F0PX_CYN7_1.PDF
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN7_1.PS
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

part 3, AE060-7de: 11081



Form A: Test chart AE06 according to ISO 9241-306
 achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline **Yes/No**
Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}
 Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}
 Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

Test of the radial grating under 90° according to picture A6W_{de}
 Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

part 2, AE061-3de: 11081

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline: Yes/No**
 either according to DIN 6160:1996 with Anomaloskop of Nagel **underline: Yes/unknown**
 or with test charts using colour points according to Ishihara **underline: Yes/unknown**
 or tested with, please specify: **underline: Yes/unknown**

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline: Yes/No**
PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_3.PDF **underline: Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_3.PS **underline: Yes/No**

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 **underline: Yes/No**
 Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_3.PDF **underline: Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN7_3.PS **underline: Yes/No**
picture A7_{de} **or underline: Yes/No**

colour measurement and specification for:
 CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline: Yes/No**
 If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
 Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer
 of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline: Yes/No**
 If No, please describe other method:

part 4, AE061-7de: 11081



input: *rgb/cmy0/000n/w set...*
 output: *->rgb_{de} setrgbcolor*

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT/.PS>
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	5,69 0,00 0,00	5,69 0,00 0,00	0,00 0,00 0,00	0,00 0,00 0,00	0,01
2	11,67 0,00 0,00	0,04 9,36 0,00	0,00 0,00 -2,00	0,00 0,00 2,30	
3	17,65 0,00 0,00	0,09 14,01 0,00	0,00 0,00 -3,00	0,00 0,00 3,63	
4	23,63 0,00 0,00	0,14 19,12 0,00	0,00 0,00 -4,00	0,00 0,00 4,51	
5	29,61 0,00 0,00	0,21 24,55 0,00	0,00 0,00 -5,00	0,00 0,00 5,06	
6	35,59 0,00 0,00	0,27 30,23 0,00	0,00 0,00 -5,00	0,00 0,00 5,36	
7	41,57 0,00 0,00	0,33 36,12 0,00	0,00 0,00 -5,00	0,00 0,00 5,45	
8	47,55 0,00 0,00	0,40 42,19 0,00	0,00 0,00 -5,00	0,00 0,00 5,36	
9	53,54 0,00 0,00	0,47 48,42 0,00	0,00 0,00 -5,00	0,00 0,00 5,11	
10	59,52 0,00 0,00	0,54 54,79 0,00	0,00 0,00 -4,00	0,00 0,00 4,72	
11	65,50 0,00 0,00	0,61 61,29 0,00	0,00 0,00 -4,00	0,00 0,00 4,20	
12	71,48 0,00 0,00	0,69 67,91 0,00	0,00 0,00 -3,00	0,00 0,00 3,57	
13	77,46 0,00 0,00	0,76 74,64 0,00	0,00 0,00 -2,00	0,00 0,00 2,82	
14	83,44 0,00 0,00	0,84 81,47 0,00	0,00 0,00 -1,00	0,00 0,00 1,97	
15	89,42 0,00 0,00	0,92 88,39 0,00	0,00 0,00 -1,00	0,00 0,00 1,03	
16	95,41 0,00 0,00	1,00 95,41 0,00	0,00 0,00 0,00	0,00 0,00 0,01	
17	5,69 0,00 0,00	5,69 0,00 0,00	0,00 0,00 0,00	0,00 0,00 0,01	
18	28,12 0,00 0,00	0,19 23,16 0,00	0,00 0,00 -4,00	0,00 0,00 4,95	
19	50,55 0,00 0,00	0,44 45,28 0,00	0,00 0,00 -5,00	0,00 0,00 5,26	
20	72,98 0,00 0,00	0,71 69,58 0,00	0,00 0,00 -3,00	0,00 0,00 3,39	
21	95,41 0,00 0,00	1,00 95,41 0,00	0,00 0,00 0,00	0,00 0,00 0,01	

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference
(16 steps)
 $\Delta E^*_{\text{CIELAB}} = 3,4$

Mean lightness difference
(5 steps)
 $\Delta L^*_{\text{CIELAB}} = 2,7$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 84,9$

part 1,

AE060-3de: 11082

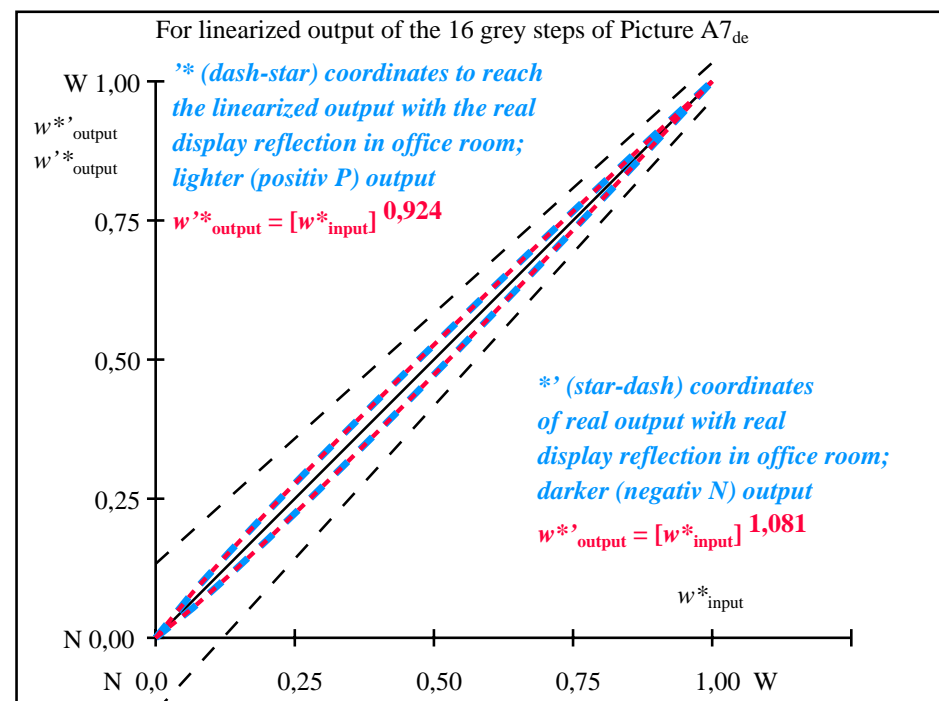

part 2,

AE061-3de: 11082

L^*/Y_{intended} (absolute)	5,6/0,6	11,6/1,3	17,6/2,4	23,6/3,9	29,6/6,0	35,5/8,8	41,5/12,2	47,5/16,4	53,5/21,5	59,5/27,5	65,5/34,6	71,4/42,8	77,4/52,3	83,4/63,0	89,4/75,0	95,4/88,5
0 0 0 n*																
setcmyk																
gN=1,081																
No. and																
Hex code																
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,053	0,112	0,175	0,239	0,304	0,371	0,439	0,506	0,575	0,645	0,714	0,785	0,857	0,927	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

AE060-7de: 11082


In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N -range 0,46 to <0,93

input: $rgb/cmy0/000n/w$ set...
output: $\rightarrow rgb_{\text{de}}$ setrgbcolor


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT> / .PS
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

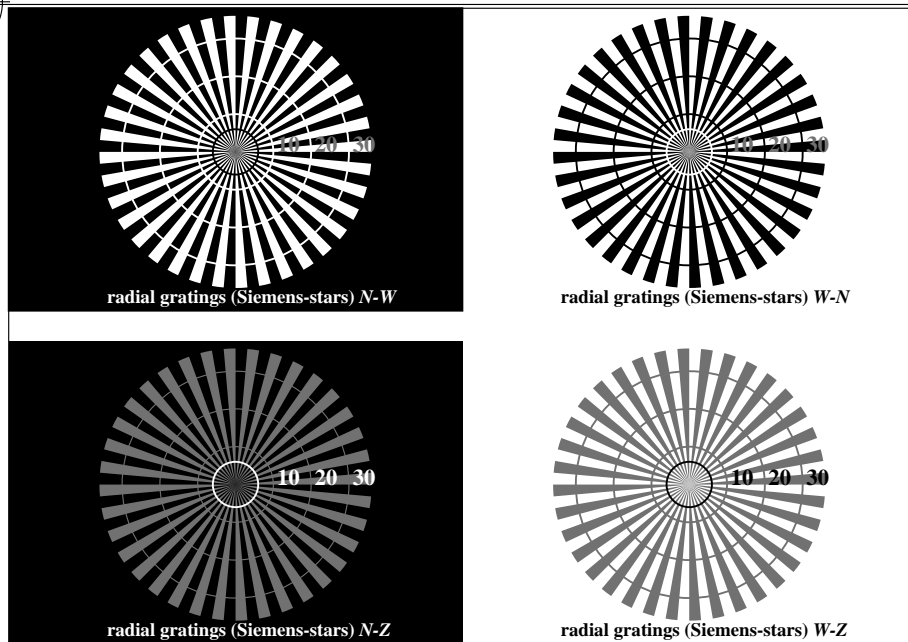


AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

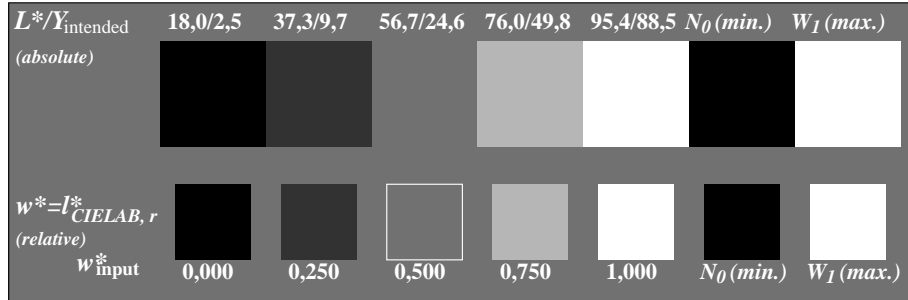

AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

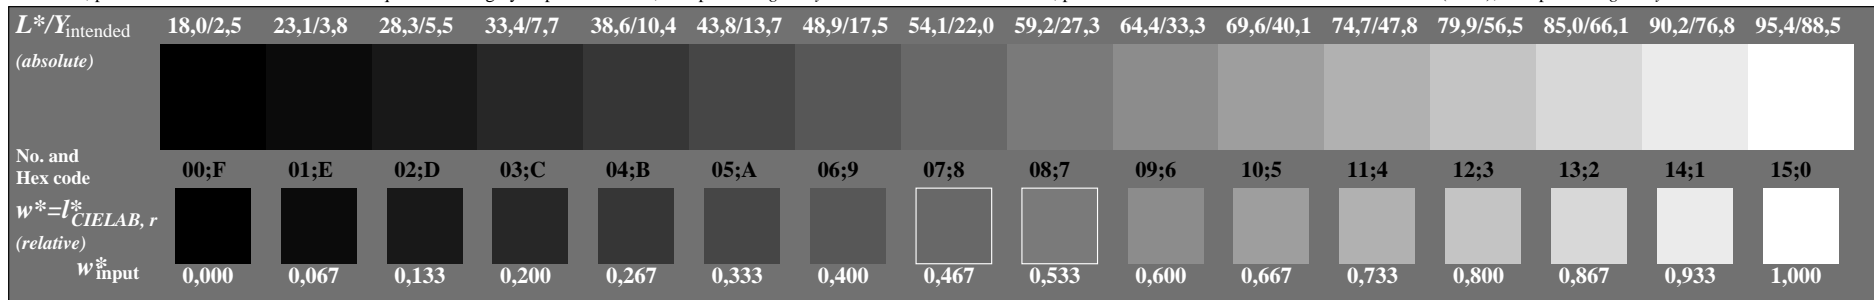

AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*




background step	0	1	ring step	0-1
Hex code	7	8	Hex code	7-8
	E		F	E-F
	2		0	2-0
	8		6	8-6
	F		D	F-D


Landolt-rings W-N

code: background - ring



AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

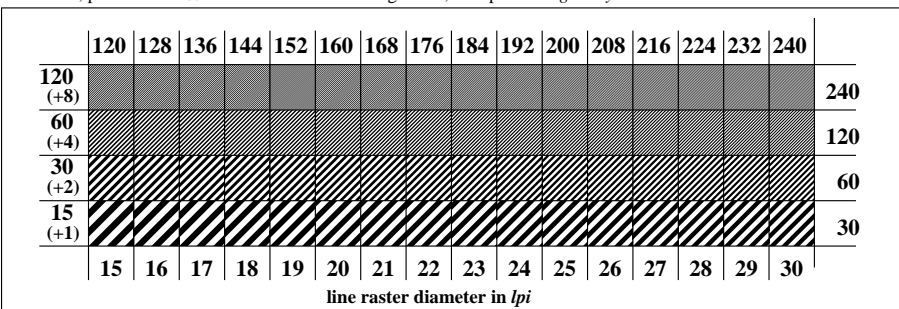


AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

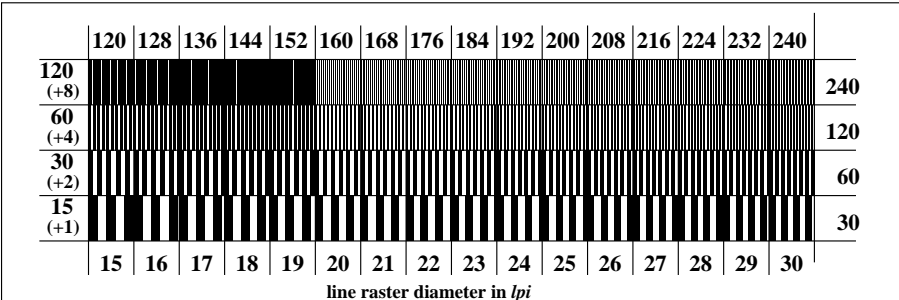


AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

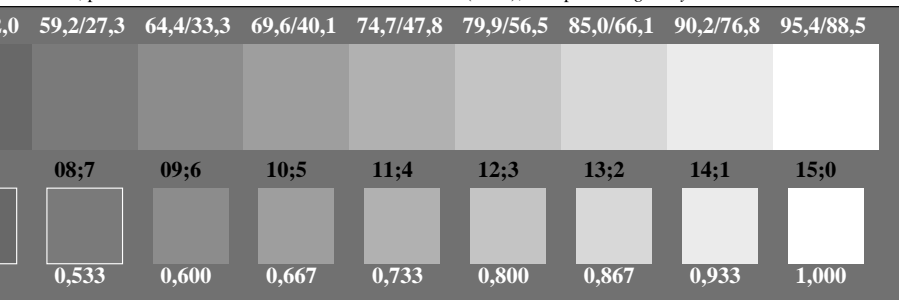




see similar files: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_1.PDF
 technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_1.PDF




<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 8/24
 F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)



TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
 application for measurement or viewing of display and print output

TUB material: code=th4ta



Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}

Are the 5 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}

Are the 16 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

part 1, AE060-3de: 110161

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_1.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_1.PS **underline: Yes/No**

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: **underline: monitor/data projector/printer**

Device model, driver and version:.....

output with PDF/PS-file: **underline: PDF/PS file**

For output with PDF file AE06F0PX_CYN6_1.PDF
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN6_1.PS
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

part 3, AE060-7de: 110161

Form A: Test chart AE06 according to ISO 9241-306
 achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

part 2, AE061-3de: 110161

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline: Yes/No**
 either according to DIN 6160:1996 with Anomaloskop of Nagel **underline: Yes/unknown**
 or with test charts using colour points according to Ishihara **underline: Yes/unknown**
 or tested with, please specify: **underline: Yes/unknown**

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline: Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_3.PS **underline: Yes/No**

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 **underline: Yes/No**

*Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN6_3.PS **underline: Yes/No**

picture A7_{de} **underline: Yes/No**

or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline: Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
 Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer
 of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline: Yes/No**

If No, please describe other method:

part 4, AE061-7de: 110161

input: *rgb/cmy0/000n/w set...*
 output: *->rgb_{de} setrgbcolor*



see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 9/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	10,99 0,00 0,00	10,99 0,00 0,00	10,99 0,00 0,00	0,00 0,00 0,00	0,01
2	16,62 0,00 0,00	13,11 0,00 0,00	13,11 0,00 0,00	-3, 0,00 0,00	3,50
3	22,24 0,00 0,00	16,44 0,00 0,00	16,44 0,00 0,00	-5, 0,00 0,00	5,80
4	27,87 0,00 0,00	20,45 0,00 0,00	20,45 0,00 0,00	-7, 0,00 0,00	7,42
5	33,50 0,00 0,00	24,98 0,00 0,00	24,98 0,00 0,00	-8, 0,00 0,00	8,52
6	39,13 0,00 0,00	29,94 0,00 0,00	29,94 0,00 0,00	-9, 0,00 0,00	9,19
7	44,75 0,00 0,00	35,27 0,00 0,00	35,27 0,00 0,00	-9, 0,00 0,00	9,48
8	50,38 0,00 0,00	40,93 0,00 0,00	40,93 0,00 0,00	-9, 0,00 0,00	9,45
9	56,01 0,00 0,00	46,89 0,00 0,00	46,89 0,00 0,00	-9, 0,00 0,00	9,11
10	61,64 0,00 0,00	53,13 0,00 0,00	53,13 0,00 0,00	-8, 0,00 0,00	8,50
11	67,27 0,00 0,00	59,62 0,00 0,00	59,62 0,00 0,00	-7, 0,00 0,00	7,64
12	72,89 0,00 0,00	66,35 0,00 0,00	66,35 0,00 0,00	-6, 0,00 0,00	6,54
13	78,52 0,00 0,00	73,31 0,00 0,00	73,31 0,00 0,00	-5, 0,00 0,00	5,21
14	84,15 0,00 0,00	80,48 0,00 0,00	80,48 0,00 0,00	-3, 0,00 0,00	3,67
15	89,78 0,00 0,00	87,84 0,00 0,00	87,84 0,00 0,00	-1, 0,00 0,00	1,93
16	95,41 0,00 0,00	95,41 0,00 0,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01
17	10,99 0,00 0,00	10,99 0,00 0,00	10,99 0,00 0,00	0,00 0,00 0,00	0,01
18	32,09 0,00 0,00	23,80 0,00 0,00	23,80 0,00 0,00	-8, 0,00 0,00	8,29
19	53,20 0,00 0,00	43,88 0,00 0,00	43,88 0,00 0,00	-9, 0,00 0,00	9,32
20	74,30 0,00 0,00	68,07 0,00 0,00	68,07 0,00 0,00	-6, 0,00 0,00	6,22
21	95,41 0,00 0,00	95,41 0,00 0,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference
(16 steps)
 $\Delta E^*_{CIELAB} = 6,0$

Mean lightness difference
(5 steps)
 $\Delta L^*_{CIELAB} = 4,7$

Mean colour reproduction index: $R^*_{ab,m} = 73,7$

part 1,

AE060-3de: 110162

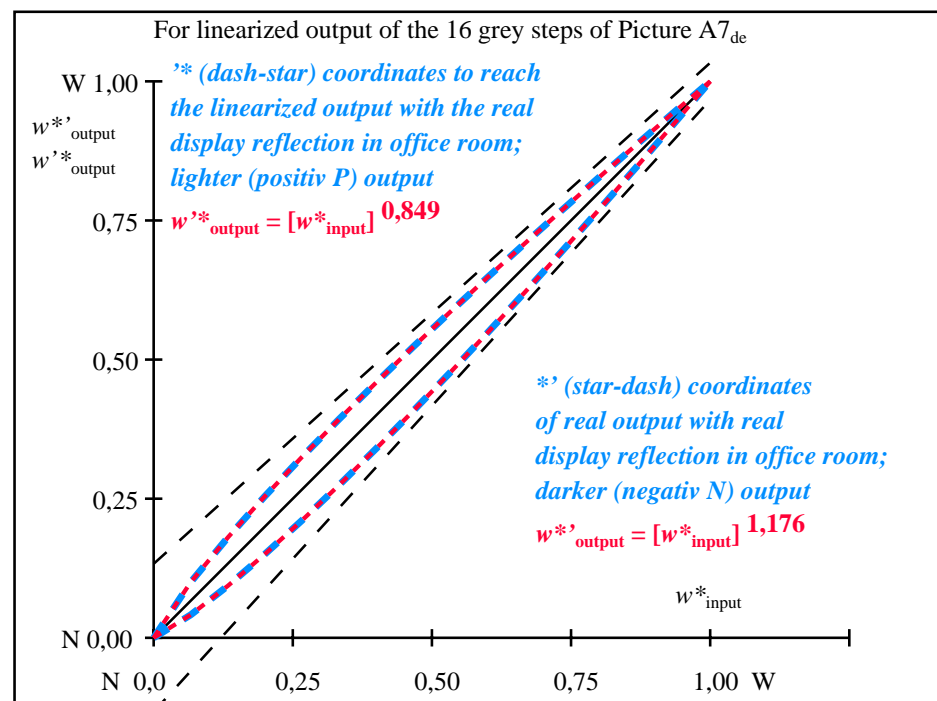

part 2,

AE061-3de: 110162

$L^*/Y^*_{intended}$ (absolute)	10,9/1,2	16,6/2,2	22,2/3,5	27,8/5,4	33,5/7,7	39,1/10,7	44,7/14,3	50,3/18,7	56,0/23,9	61,6/29,9	67,2/36,9	72,8/45,0	78,5/54,1	84,1/64,3	89,7/75,8	95,4/88,5
0 0 0 n* setcmyk																
gN=1,176																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,041	0,093	0,150	0,211	0,274	0,340	0,408	0,476	0,548	0,620	0,693	0,769	0,845	0,921	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


AE060-7de: 110162

In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N -range 0,93 to <1,87


input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 10/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

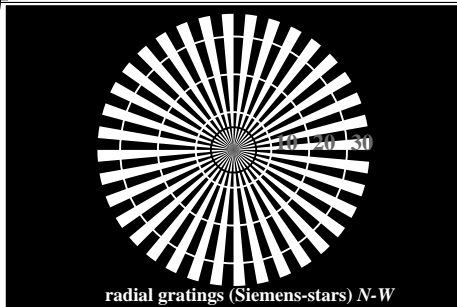


radial gratings (Siemens-stars) N-W

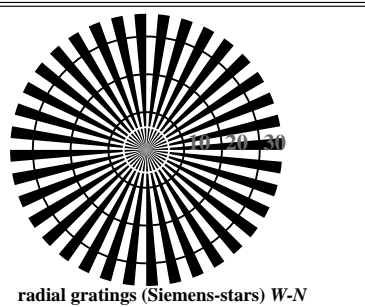

radial gratings (Siemens-stars) W-N

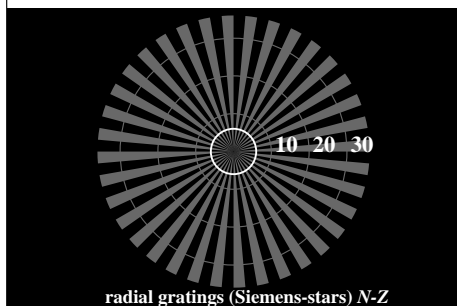


radial gratings (Siemens-stars) N-Z

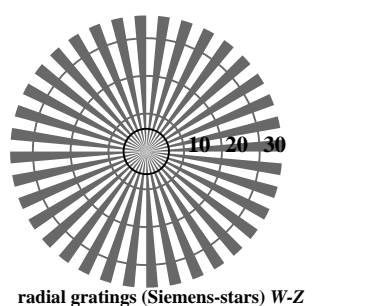


radial gratings (Siemens-stars) W-Z

AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

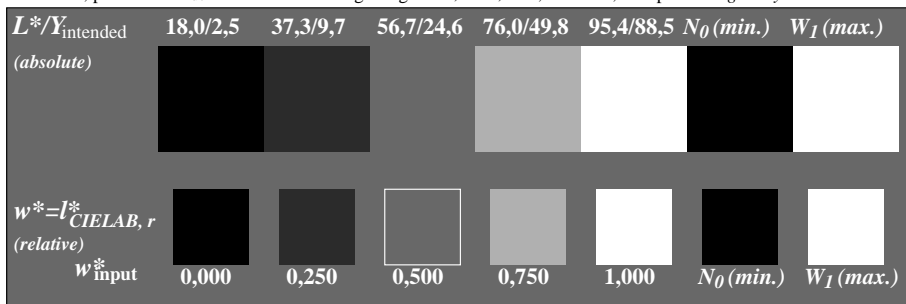


AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

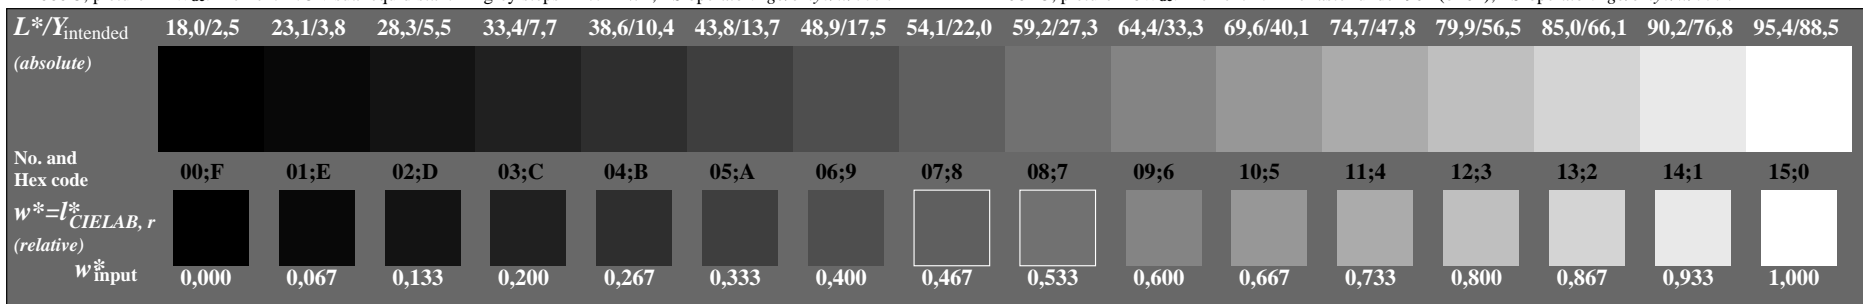

AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*




Test chart AE06 according to ISO 9241-306
achromatic test chart N

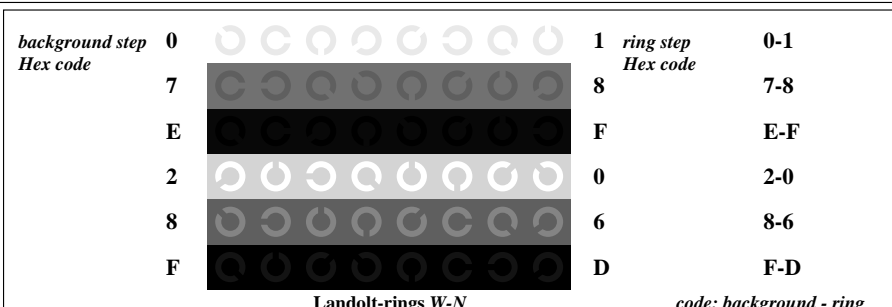

Landolt-rings W-N


code: background - ring

AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

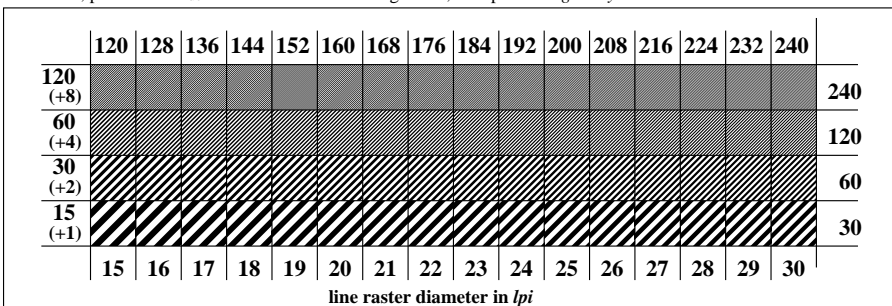


line raster diameter in lpi

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

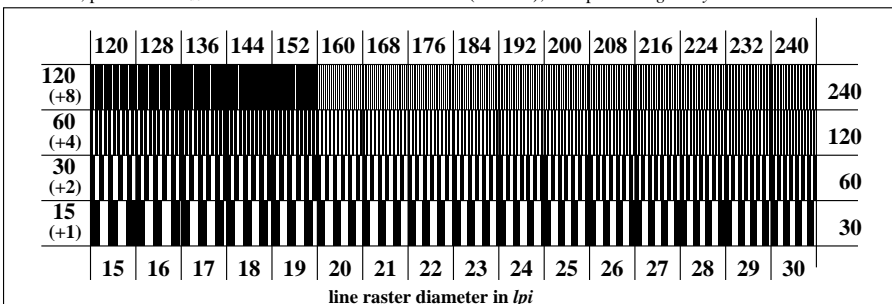

line raster diameter in lpi

AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

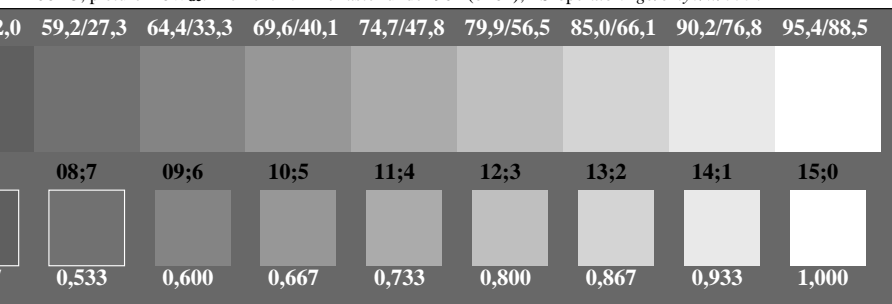

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*



see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT> / .PS
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 11/24
F: 3D-linearization AE06/AE06LF0NX.PDF / .PS in file (F)

Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}
Are the 5 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 5 steps:

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 16 steps:

part 1, AE060-3de: 110241

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_1.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_1.PS underline: Yes/No

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: underline: monitor/data projector/printer

Device model, driver and version:.....

output with PDF/PS-file: underline: PDF/PS file

For output with PDF file AE06F0PX_CYN5_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN5_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

.....
.....
.....

part 3, AE060-7de: 110241

Form A: Test chart AE06 according to ISO 9241-306
achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? Yes/No
Visual testing: for radial diameter from 15 to 60 lpi Yes/No
Test with magnifying glass (e.g. 6x) - from 15 to lpi

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? Yes/No
Visual testing: for radial diameter from 15 to 60 lpi Yes/No
Test with magnifying glass (e.g. 6x) - from 15 to lpi

part 2, AE061-3de: 110241

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline: Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline: Yes/unknown
or with test charts using colour points according to Ishihara underline: Yes/unknown
or tested with, please specify: underline: Yes/unknown

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) underline: Yes/No

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_3.PS underline: Yes/No

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline: Yes/No

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN5_3.PS or underline: Yes/No

picture A7_{de} underline: Yes/No
or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline: Yes/No

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer

of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF underline: Yes/No

If No, please describe other method:

part 4, AE061-7de: 110241

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*

TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 12/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE06F0NX.PDF> in file (F)

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	18,00 0,00 0,00	0,00	18,00 0,00 0,00	0,00 0,00 0,00	0,01
2	23,16 0,00 0,00	0,01	19,20 0,00 0,00	-3, 0,00 0,00	3,96
3	28,32 0,00 0,00	0,04	21,48 0,00 0,00	-6, 0,00 0,00	6,84
4	33,48 0,00 0,00	0,08	24,50 0,00 0,00	-8, 0,00 0,00	8,98
5	38,64 0,00 0,00	0,13	28,11 0,00 0,00	-10, 0,00 0,00	10,53
6	43,80 0,00 0,00	0,18	32,26 0,00 0,00	-11, 0,00 0,00	11,54
7	48,96 0,00 0,00	0,24	36,88 0,00 0,00	-12, 0,00 0,00	12,08
8	54,12 0,00 0,00	0,30	41,94 0,00 0,00	-12, 0,00 0,00	12,18
9	59,28 0,00 0,00	0,37	47,40 0,00 0,00	-11, 0,00 0,00	11,88
10	64,44 0,00 0,00	0,45	53,25 0,00 0,00	-11, 0,00 0,00	11,19
11	69,60 0,00 0,00	0,53	59,46 0,00 0,00	-10, 0,00 0,00	10,14
12	74,76 0,00 0,00	0,62	66,01 0,00 0,00	-8, 0,00 0,00	8,75
13	79,92 0,00 0,00	0,70	72,90 0,00 0,00	-7, 0,00 0,00	7,02
14	85,08 0,00 0,00	0,80	80,10 0,00 0,00	-4, 0,00 0,00	4,98
15	90,24 0,00 0,00	0,89	87,60 0,00 0,00	-2, 0,00 0,00	2,64
16	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01
17	18,00 0,00 0,00	0,00	18,00 0,00 0,00	0,00 0,00 0,00	0,01
18	37,35 0,00 0,00	0,11	27,16 0,00 0,00	-10, 0,00 0,00	10,19
19	56,70 0,00 0,00	0,34	44,62 0,00 0,00	-12, 0,00 0,00	12,08
20	76,05 0,00 0,00	0,64	67,70 0,00 0,00	-8, 0,00 0,00	8,35
21	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference
(16 steps)
ΔE*_{CIELAB} = 7,6

Mean lightness difference
(5 steps)
ΔL*_{CIELAB} = 6,1

Mean colour reproduction index: R*_{ab,m} = 66,3

part 1,

AE060-3de: 110242

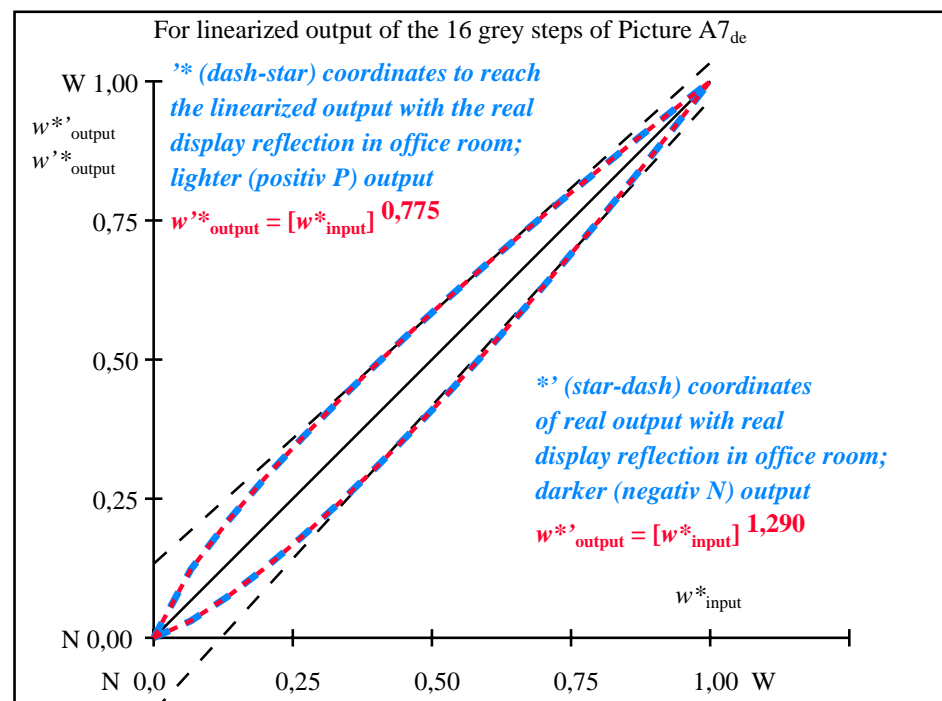

part 2,

AE061-3de: 110242

L*/Y _{intended} (absolute)	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,9	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
0 0 0 n* setcmyk																
gN=1,290																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
w* = l* CIELAB, r (relative)																
w* _{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w* _{output}	0,000	0,030	0,074	0,125	0,181	0,241	0,306	0,374	0,444	0,517	0,593	0,669	0,749	0,831	0,914	1,000

part 3, picture A7_{de}: 16 visual equidistant L*-grey steps; PS operator: 0 0 0 n* setcmykcolor

AE060-7de: 110242


In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast Y_W:Y_N=88,9:2,5; Y_N-range 1,87 to <3,75

input: rgb/cmy0/000n/w set...
output: ->rgb_{de} setrgbcolor


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 13/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

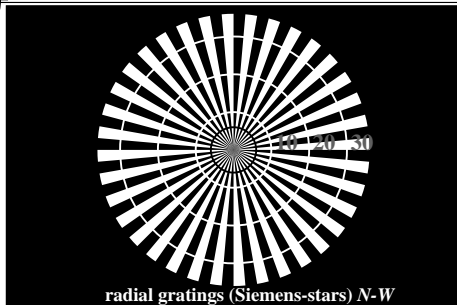


radial gratings (Siemens-stars) N-W



radial gratings (Siemens-stars) W-N

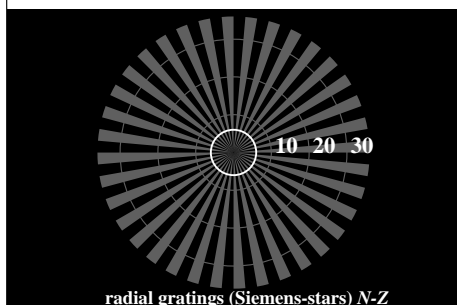

radial gratings (Siemens-stars) N-Z



radial gratings (Siemens-stars) W-Z

AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended} (absolute)	18,0/2,5	37,3/9,7	56,7/24,6	76,0/49,8	95,4/88,5	N_0 (min.)	W_1 (max.)
$w^* = I^*_{\text{CIELAB}, r}$ (relative)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended} (absolute)	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,8	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
No. and Hex code	00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
$w^* = I^*_{\text{CIELAB}, r}$ (relative)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*



Test chart AE06 according to ISO 9241-306
achromatic test chart N

background step	0	1	ring step	0-1
Hex code	7	8	Hex code	7-8
E		F		E-F
2		0		2-0
8		6		8-6
F		D		F-D

Landolt-rings W-N

code: background - ring

AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


line raster diameter in lpi

AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*


	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*






see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 14/24
 technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_1.PDF




<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 14/24
 F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)



TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
 application for measurement or viewing of display and print output

TUB material: code=th4ta



Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? **Yes/No**
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}

Are the 5 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}

Are the 16 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? Steps

part 1, AE060-3de: 110321

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_1.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_1.PS **underline: Yes/No**

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: **underline: monitor/data projector/printer**

Device model, driver and version:.....

output with PDF/PS-file: **underline: PDF/PS file**

For output with PDF file AE06F0PX_CYN4_1.PDF
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN4_1.PS
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

part 3, AE060-7de: 110321

Form A: Test chart AE06 according to ISO 9241-306
 achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? **Yes/No**
 Visual testing: for radial diameter from 15 to 60 lpi lpi
 Test with magnifying glass (e.g. 6x) - from 15 to

part 2, AE061-3de: 110321

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline: Yes/No**
 either according to DIN 6160:1996 with Anomaloskop of Nagel **underline: Yes/unknown**
 or with test charts using colour points according to Ishihara **underline: Yes/unknown**
 or tested with, please specify: **underline: Yes/unknown**

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline: Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_3.PS **underline: Yes/No**

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 **underline: Yes/No**

*Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_3.PDF **underline: Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN4_3.PS **underline: Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline: Yes/No**
 If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
 Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer
 of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline: Yes/No**
 If No, please describe other method:

part 4, AE061-7de: 110321

input: *rgb/cmy0/000n/w set...*
 output: *->rgb_{de} setrgbcolor*



see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT> / .PS
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=rh4ta

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*	Start output S1
1	26,84 0,00 0,00	0,00	26,84 0,00 0,00	0,00 0,00 0,00	0,01	Specification according to
2	31,41 0,00 0,00	0,00	27,49 0,00 0,00	-3, 0,00 0,00	3,92	ISO/IEC 15775 Annex G
3	35,98 0,00 0,00	0,03	28,99 0,00 0,00	-6, 0,00 0,00	6,99	and DIN 33866-1 Annex G
4	40,56 0,00 0,00	0,06	31,15 0,00 0,00	-9, 0,00 0,00	9,40	
5	45,13 0,00 0,00	0,10	33,90 0,00 0,00	-11, 0,00 0,00	11,22	
6	49,70 0,00 0,00	0,15	37,21 0,00 0,00	-12, 0,00 0,00	12,49	
7	54,27 0,00 0,00	0,20	41,02 0,00 0,00	-13, 0,00 0,00	13,24	
8	58,84 0,00 0,00	0,26	45,33 0,00 0,00	-13, 0,00 0,00	13,51	
9	63,41 0,00 0,00	0,33	50,10 0,00 0,00	-13, 0,00 0,00	13,31	
10	67,98 0,00 0,00	0,41	55,32 0,00 0,00	-12, 0,00 0,00	12,65	
11	72,55 0,00 0,00	0,49	60,98 0,00 0,00	-11, 0,00 0,00	11,57	
12	77,12 0,00 0,00	0,58	67,06 0,00 0,00	-10, 0,00 0,00	10,06	
13	81,69 0,00 0,00	0,68	73,55 0,00 0,00	-8, 0,00 0,00	8,14	
14	86,26 0,00 0,00	0,78	80,45 0,00 0,00	-5, 0,00 0,00	5,81	Mean lightness difference
15	90,83 0,00 0,00	0,88	87,73 0,00 0,00	-3, 0,00 0,00	3,10	(16 steps)
16	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01	ΔE* _{CIELAB} = 8,4
17	26,84 0,00 0,00	0,00	26,84 0,00 0,00	0,00 0,00 0,00	0,01	
18	43,98 0,00 0,00	0,09	33,16 0,00 0,00	-10, 0,00 0,00	10,82	
19	61,12 0,00 0,00	0,30	47,66 0,00 0,00	-13, 0,00 0,00	13,46	Mean lightness difference
20	78,26 0,00 0,00	0,60	68,64 0,00 0,00	-9, 0,00 0,00	9,62	(5 steps)
21	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01	ΔL* _{CIELAB} = 6,7

Mean colour reproduction index: $R^*_{ab,m} = 62,8$

part 1,

AE060-3de: 110322

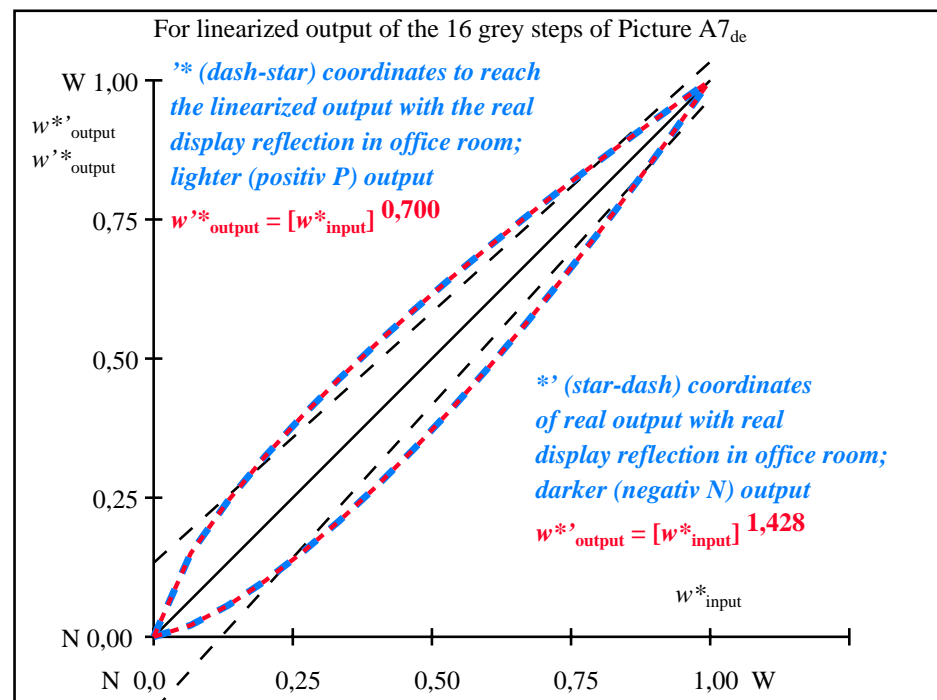

part 2,

AE061-3de: 110322

$L^*/Y_{intended}$ (absolute)	26,8/5,0	31,4/6,8	35,9/9,0	40,5/11,5	45,1/14,6	49,7/18,1	54,2/22,2	58,8/26,8	63,4/32,0	67,9/37,9	72,5/44,4	77,1/51,7	81,6/59,7	86,2/68,5	90,8/78,1	95,4/88,5
0 0 0 n* setcmyk																
gN=1,428																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,021	0,056	0,100	0,151	0,207	0,270	0,336	0,407	0,482	0,560	0,641	0,727	0,815	0,905	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


AE060-7de: 110322

In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N -range 3,75 to <7,5


input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 16/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

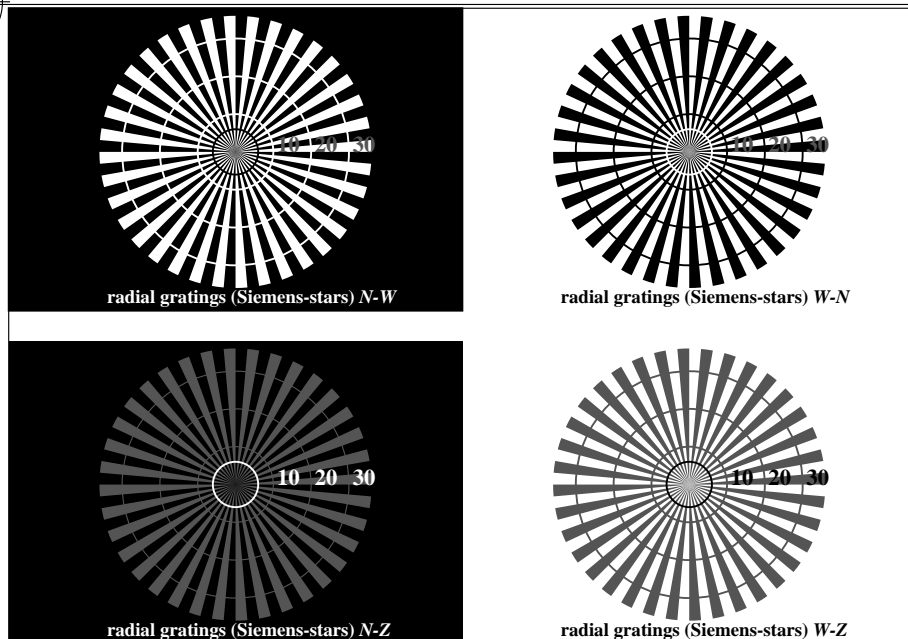


AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

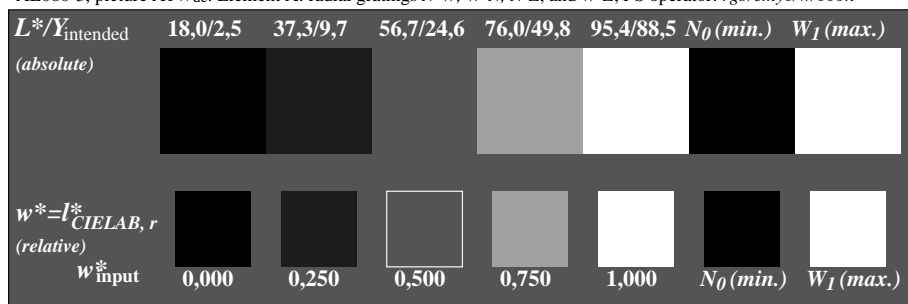


AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

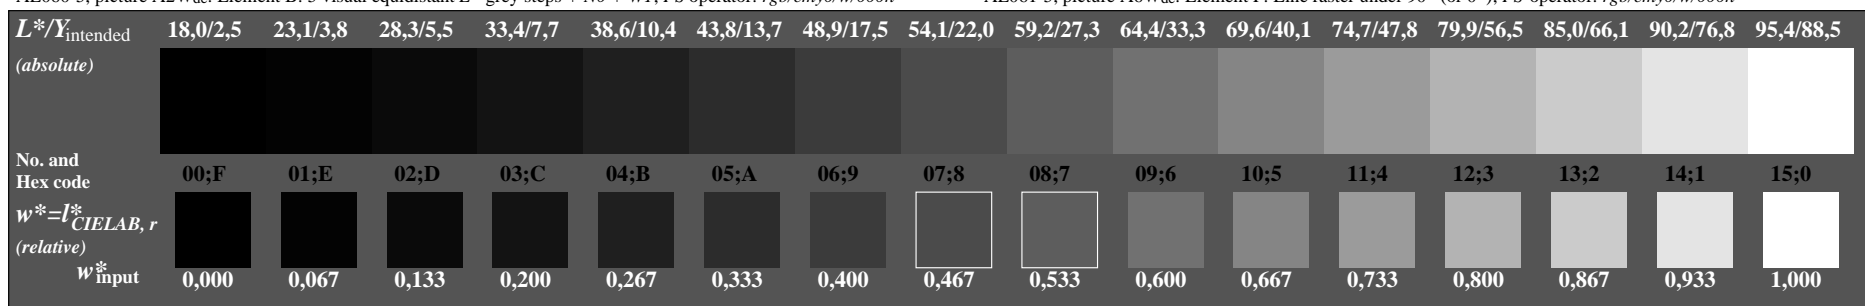


AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*




Test chart AE06 according to ISO 9241-306
achromatic test chart N

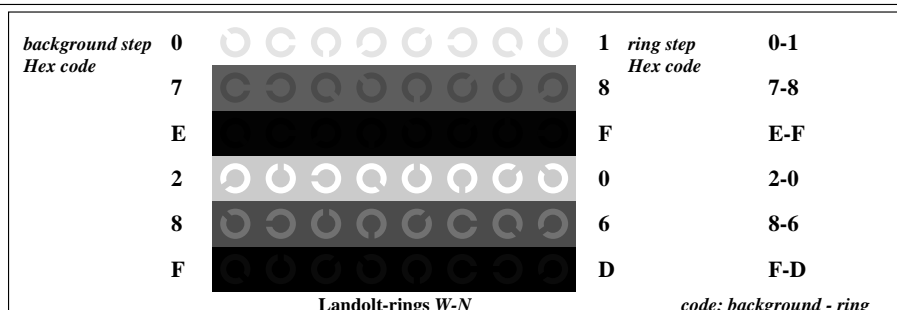


AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

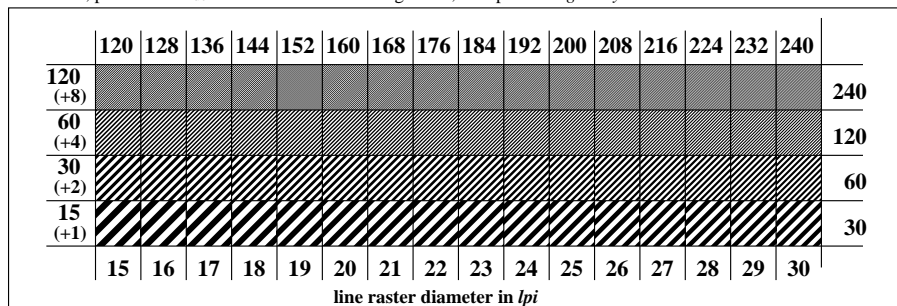

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

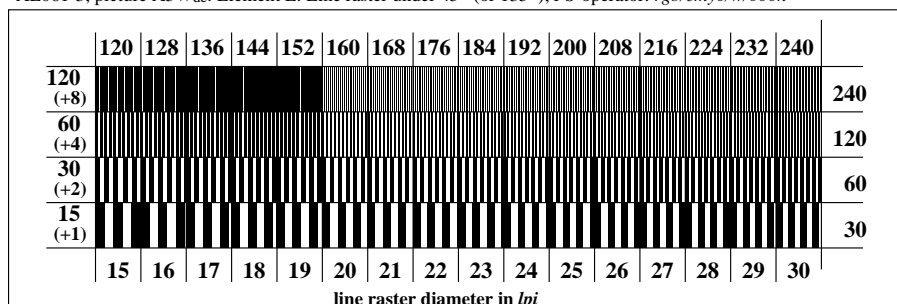

AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

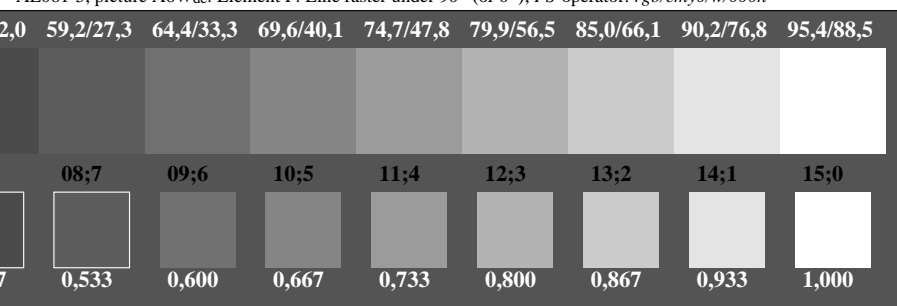

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*



see similar files: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_1.PDF
technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_1.PDF

<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 17/24
F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)

Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}
Are the 5 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 5 steps:

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 16 steps:

part 1, AE060-3de: 110401

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_1.PDF underline: Yes/No
PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_1.PS underline: Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: underline: monitor/data projector/printer

Device model, driver and version:.....

output with PDF/PS-file: underline: PDF/PS file

For output with PDF file AE06F0PX_CYN3_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN3_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

.....
.....
.....

part 3, AE060-7de: 110401

Form A: Test chart AE06 according to ISO 9241-306
achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring

0 - 1 Yes/No
7 - 8 Yes/No
E - F Yes/No
2 - 0 Yes/No
8 - 6 Yes/No
F - D Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen?

Visual testing: for radial diameter from 15 to 60 lpi

Test with magnifying glass (e.g. 6x) - from 15 to lpi

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen?

Visual testing: for radial diameter from 15 to 60 lpi

Test with magnifying glass (e.g. 6x) - from 15 to lpi

part 2, AE061-3de: 110401

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test:
either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline: Yes/No
underline: Yes/unknown
underline: Yes/unknown
underline: Yes/unknown

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_3.PS underline: Yes/No

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline: Yes/No

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_3.PDF

picture A7_{de} underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN3_3.PS

picture A7_{de} or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline: Yes/No

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer

of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF

underline: Yes/No

If No, please describe other method:

part 4, AE061-7de: 110401

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*

TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
application for measurement or viewing of display and print output

TUB material: code=th4ta


see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 18/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

i	LAB [*] _{ref}	L [*] _{out}	LAB [*] _{out}	LAB [*] _{out-ref}	ΔE [*]	Start output S1
1	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01	Specification according to
2	41,81 0,00 0,00	0,00	38,32 0,00 0,00	-3, 0,00 0,00	3,49	ISO/IEC 15775 Annex G
3	45,64 0,00 0,00	0,02	39,23 0,00 0,00	-6, 0,00 0,00	6,40	and DIN 33866-1 Annex G
4	49,47 0,00 0,00	0,04	40,68 0,00 0,00	-8, 0,00 0,00	8,78	
5	53,29 0,00 0,00	0,08	42,64 0,00 0,00	-10, 0,00 0,00	10,65	
6	57,12 0,00 0,00	0,12	45,10 0,00 0,00	-12, 0,00 0,00	12,02	
7	60,95 0,00 0,00	0,17	48,05 0,00 0,00	-12, 0,00 0,00	12,90	
8	64,78 0,00 0,00	0,23	51,48 0,00 0,00	-13, 0,00 0,00	13,30	
9	68,61 0,00 0,00	0,30	55,37 0,00 0,00	-13, 0,00 0,00	13,23	
10	72,44 0,00 0,00	0,37	59,74 0,00 0,00	-12, 0,00 0,00	12,69	
11	76,26 0,00 0,00	0,46	64,56 0,00 0,00	-11, 0,00 0,00	11,70	
12	80,09 0,00 0,00	0,55	69,83 0,00 0,00	-10, 0,00 0,00	10,25	
13	83,92 0,00 0,00	0,65	75,56 0,00 0,00	-8, 0,00 0,00	8,35	
14	87,75 0,00 0,00	0,76	81,73 0,00 0,00	-6, 0,00 0,00	6,01	Mean lightness difference
15	91,58 0,00 0,00	0,87	88,35 0,00 0,00	-3, 0,00 0,00	3,22	(16 steps)
16	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01	ΔE [*] _{CIELAB} = 8,3
17	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01	
18	52,34 0,00 0,00	0,07	42,10 0,00 0,00	-10, 0,00 0,00	10,23	Mean lightness difference
19	66,69 0,00 0,00	0,26	53,37 0,00 0,00	-13, 0,00 0,00	13,32	(5 steps)
20	81,05 0,00 0,00	0,57	71,22 0,00 0,00	-9, 0,00 0,00	9,82	ΔL [*] _{CIELAB} = 6,6
21	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01	

Mean colour reproduction index: $R^*_{ab,m} = 63,5$

part 1,

AE060-3de: 110402

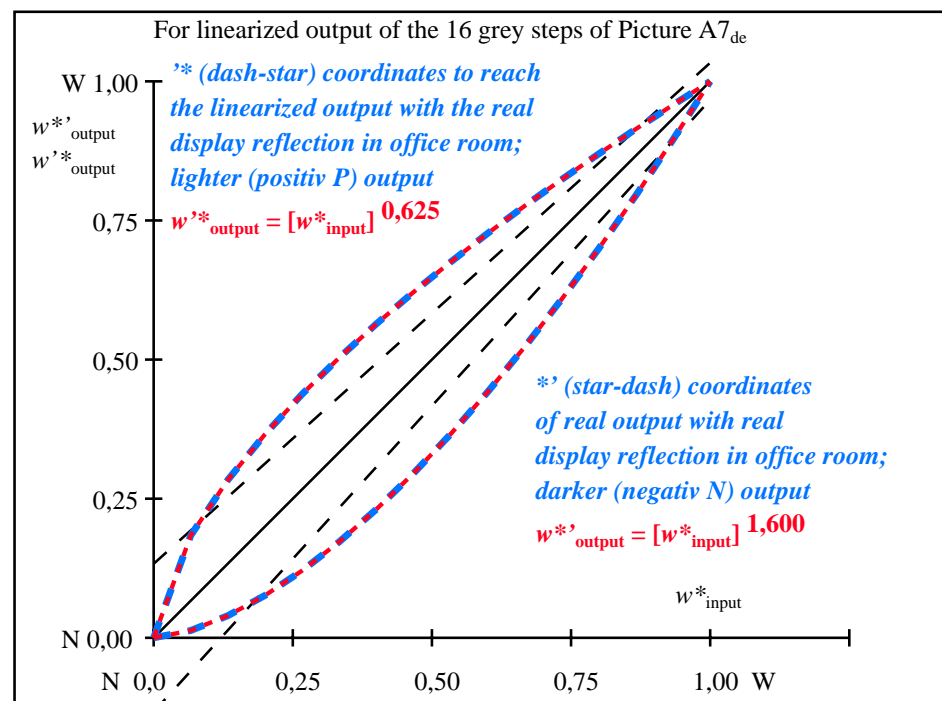

AE061-3de: 110402

L [*] /Y _{intended} (absolute)	37,9/10,0	41,8/12,3	45,6/15,0	49,4/17,9	53,2/21,3	57,1/25,0	60,9/29,1	64,7/33,7	68,6/38,8	72,4/44,3	76,2/50,3	80,0/56,8	83,9/63,9	87,7/71,5	91,5/79,7	95,4/88,5
0 0 0 n [*] setcmyk																
gN=1,600																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
w [*] =l [*] CIELAB, r (relative)																
w [*] _{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w [*] _{output}	0,000	0,013	0,039	0,076	0,120	0,172	0,230	0,295	0,365	0,441	0,523	0,608	0,699	0,795	0,894	1,000

part 3, picture A7_{de}: 16 visual equidistant L^{*}-grey steps; PS operator: 0 0 0 n^{*} setcmykcolor


AE060-7de: 110402

In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N -range 7,5 to <15


input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*

TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta


see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> / .PS; 3D-linearization, page 19/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

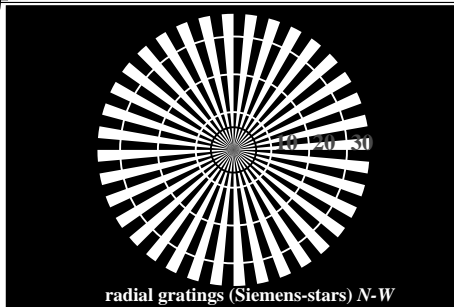


radial gratings (Siemens-stars) N-W



radial gratings (Siemens-stars) W-N

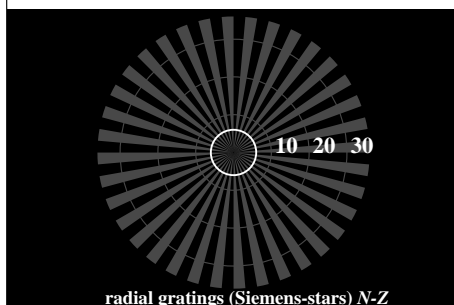

radial gratings (Siemens-stars) N-Z



radial gratings (Siemens-stars) W-Z

AE060-3, picture A1W_{de}: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended}	18,0/2,5	37,3/9,7	56,7/24,6	76,0/49,8	95,4/88,5	N_0 (min.)	W_1 (max.)
(absolute)							
$w^* = I^*_{\text{CIELAB}, r}$							
(relative)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

AE060-5, picture A2W_{de}: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

L^*/Y_{intended}	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,8	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
(absolute)																
No. and Hex code	00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
$w^* = I^*_{\text{CIELAB}, r}$																
(relative)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

AE060-7, picture A3W_{de}: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*



Test chart AE06 according to ISO 9241-306
achromatic test chart N

background step	0	1	ring step	0-1
Hex code	7	8	Hex code	7-8
E				
2				
8				
F				
Landolt-rings W-N				code: background - ring

AE061-1, picture A4W_{de}: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
line raster diameter in lpi																	

AE061-3, picture A5W_{de}: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
line raster diameter in lpi																	


AE061-5, picture A6W_{de}: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
line raster diameter in lpi																	


input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*



TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta



see similar files: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_1.PDF
 technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_1.PDF



<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 20/24
 F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)

Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}

Are the 5 steps on the upper rows distinguishable? Yes/No
 If No: How many steps can be distinguished? Steps

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}

Are the 16 steps on the upper rows distinguishable? Yes/No
 If No: How many steps can be distinguished? Steps

part 1, AE060-3de: 110481

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_1.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_1.PS underline: Yes/No

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: underline: monitor/data projector/printer

Device model, driver and version:.....

output with PDF/PS-file: underline: PDF/PS file


For output with PDF file AE06F0PX_CYN2_1.PDF
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN2_1.PS
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)


part 3, AE060-7de: 110481

Form A: Test chart AE06 according to ISO 9241-306
 achromatic test chart N



TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
 application for measurement or viewing of display and print output

TUB material: code=th4ta



Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No

Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}

Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring	Yes/No
0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? Yes/No

Visual testing: for radial diameter from 15 to 60 lpi lpi

Test with magnifying glass (e.g. 6x) - from 15 to

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? Yes/No

Visual testing: for radial diameter from 15 to 60 lpi lpi

Test with magnifying glass (e.g. 6x) - from 15 to

part 2, AE061-3de: 110481

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline: Yes/No
 either according to DIN 6160:1996 with Anomaloskop of Nagel underline: Yes/unknown
 or with test charts using colour points according to Ishihara underline: Yes/unknown
 or tested with, please specify: underline: Yes/unknown

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) underline: Yes/No

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_3.PS underline: Yes/No

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 underline: Yes/No

Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN2_3.PS or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline: Yes/No

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
 Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer
 of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF underline: Yes/No

If No, please describe other method:

part 4, AE061-7de: 110481

input: *rgb/cmy0/000n/w set...*
 output: *->rgb_{de} setrgbcolor*

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0FA.TXT> / .PS
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=rha4ta

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	52,01 0,00 0,00	52,01 0,00 0,00	52,01 0,00 0,00	0,00 0,00 0,00	0,01
2	54,91 0,00 0,00	52,17 0,00 0,00	52,17 0,00 0,00	-2, 0,00 0,00	2,73
3	57,80 0,00 0,00	52,67 0,00 0,00	52,67 0,00 0,00	-5, 0,00 0,00	5,12
4	60,69 0,00 0,00	53,54 0,00 0,00	53,54 0,00 0,00	-7, 0,00 0,00	7,15
5	63,58 0,00 0,00	54,79 0,00 0,00	54,79 0,00 0,00	-8, 0,00 0,00	8,79
6	66,48 0,00 0,00	56,43 0,00 0,00	56,43 0,00 0,00	-10, 0,00 0,00	10,04
7	69,37 0,00 0,00	58,46 0,00 0,00	58,46 0,00 0,00	-10, 0,00 0,00	10,90
8	72,26 0,00 0,00	60,90 0,00 0,00	60,90 0,00 0,00	-11, 0,00 0,00	11,35
9	75,16 0,00 0,00	63,75 0,00 0,00	63,75 0,00 0,00	-11, 0,00 0,00	11,40
10	78,05 0,00 0,00	67,01 0,00 0,00	67,01 0,00 0,00	-11, 0,00 0,00	11,03
11	80,94 0,00 0,00	70,68 0,00 0,00	70,68 0,00 0,00	-10, 0,00 0,00	10,25
12	83,83 0,00 0,00	74,78 0,00 0,00	74,78 0,00 0,00	-9, 0,00 0,00	9,05
13	86,73 0,00 0,00	79,29 0,00 0,00	79,29 0,00 0,00	-7, 0,00 0,00	7,43
14	89,62 0,00 0,00	84,23 0,00 0,00	84,23 0,00 0,00	-5, 0,00 0,00	5,38
15	92,51 0,00 0,00	89,60 0,00 0,00	89,60 0,00 0,00	-2, 0,00 0,00	2,90
16	95,41 0,00 0,00	95,41 0,00 0,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01
17	52,01 0,00 0,00	52,01 0,00 0,00	52,01 0,00 0,00	0,00 0,00 0,00	0,01
18	62,86 0,00 0,00	54,44 0,00 0,00	54,44 0,00 0,00	-8, 0,00 0,00	8,42
19	73,71 0,00 0,00	62,28 0,00 0,00	62,28 0,00 0,00	-11, 0,00 0,00	11,43
20	84,56 0,00 0,00	75,87 0,00 0,00	75,87 0,00 0,00	-8, 0,00 0,00	8,69
21	95,41 0,00 0,00	95,41 0,00 0,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference
(16 steps)
 $\Delta E^*_{CIELAB} = 7,1$

Mean lightness difference
(5 steps)
 $\Delta L^*_{CIELAB} = 5,7$

Mean colour reproduction index: $R^*_{ab,m} = 68,8$

part 1,

AE060-3de: 110482

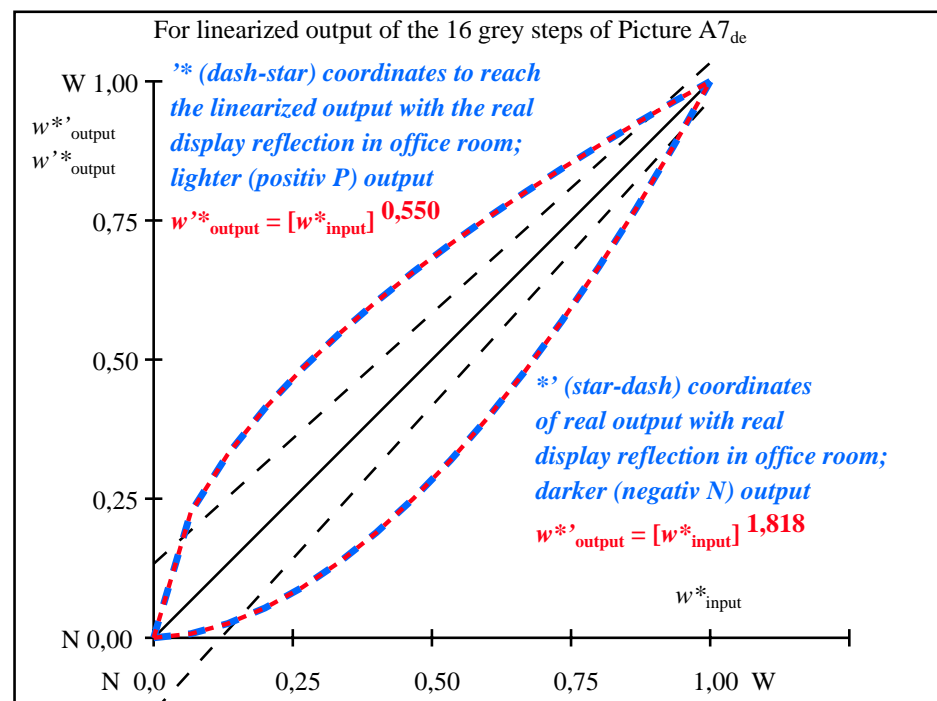

part 2,

AE061-3de: 110482

$L^*/Y_{intended}$ (absolute)	52,0/20,1	54,9/22,8	57,8/25,7	60,6/28,9	63,5/32,2	66,4/35,9	69,3/39,8	72,2/44,0	75,1/48,5	78,0/53,3	80,9/58,3	83,8/63,7	86,7/69,4	89,6/75,4	92,5/81,8	95,4/88,5
0 0 0 n*																
setcmk																
g _N =1,818																
No. and																
Hex code																
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,007	0,025	0,053	0,090	0,135	0,189	0,250	0,318	0,395	0,478	0,568	0,666	0,771	0,881	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmkcolor


AE060-7de: 110482

In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N -range 15 to <30


input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcOLOR

see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>


TUB Registration: 20190301-AE06/AE06L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta

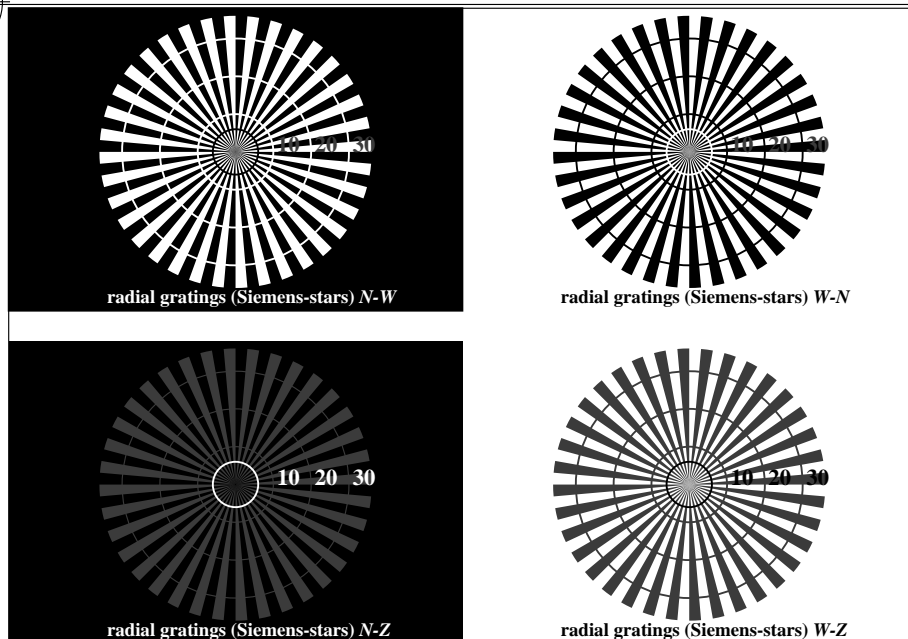


AE060-3, picture A1Wde: Element A: radial gratings N-W, W-N, N-Z, and W-Z; PS operator: *rgb/cmy0/w/000n*

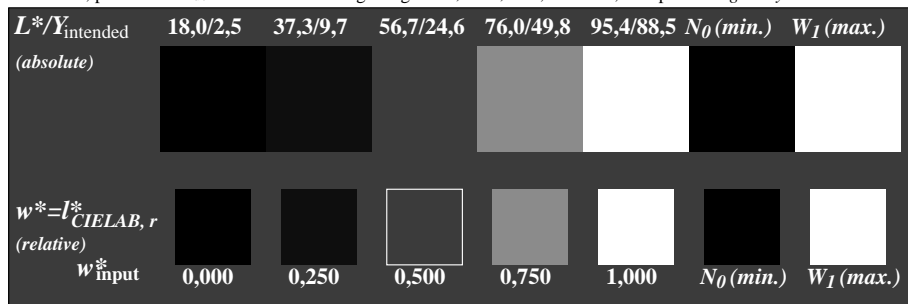


AE060-5, picture A2Wde: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

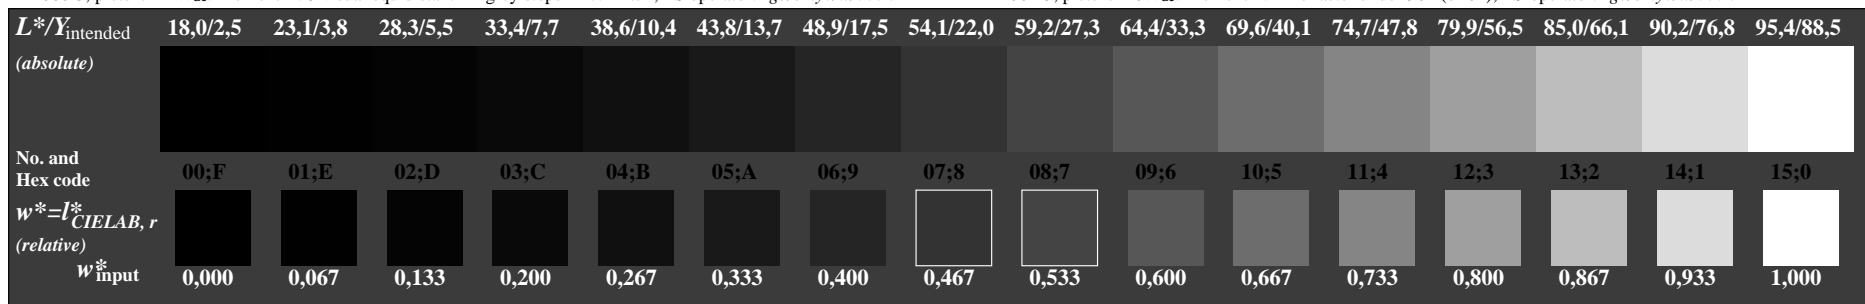


AE060-7, picture A3Wde: Element C: 16 visual equidistant L^* -grey steps; PS operator: *rgb/cmy0/w/000n*




Test chart AE06 according to ISO 9241-306
achromatic test chart N

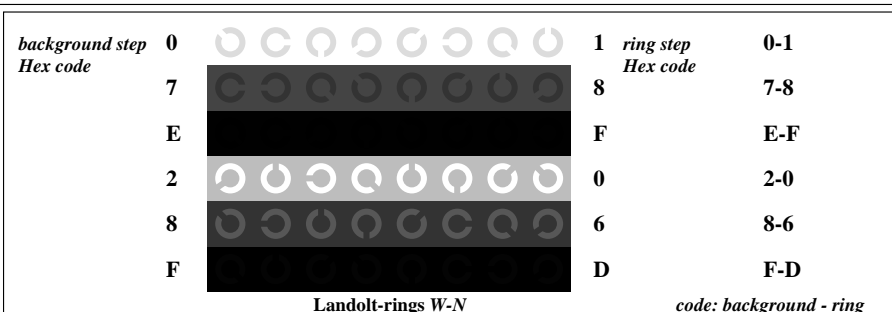


AE061-1, picture A4Wde: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0/w/000n*

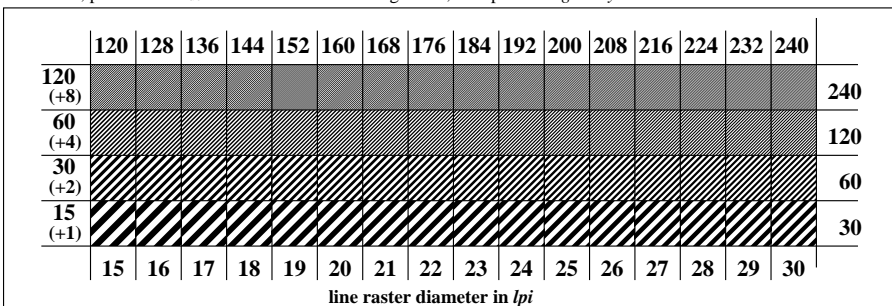

AE061-3, picture A5Wde: Element E: Line raster under 45° (or 135°); PS-operator: *rgb/cmy0/w/000n*

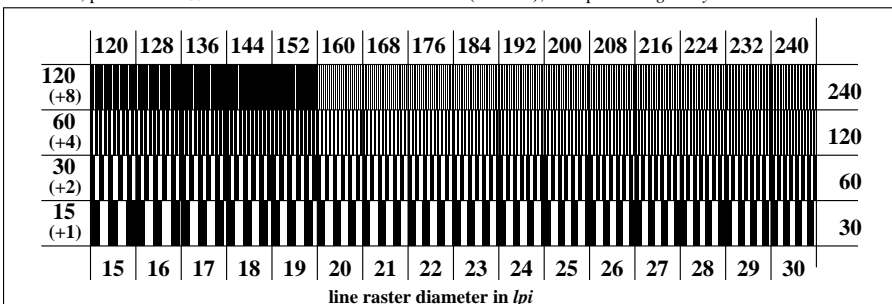

AE061-5, picture A6Wde: Element F: Line raster under 90° (or 0°); PS-operator: *rgb/cmy0/w/000n*

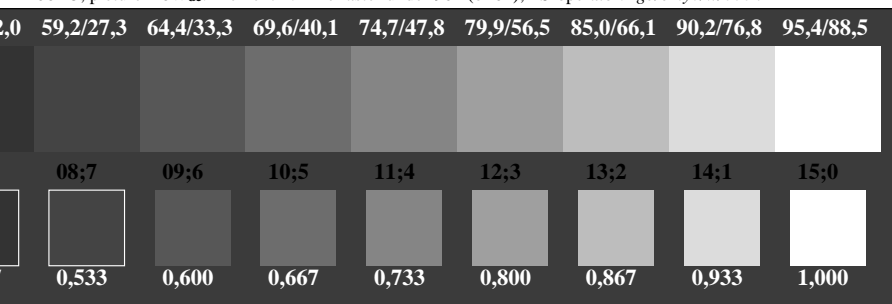

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*

see similar files: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_1.PDF
technical information: <http://farbe.li.tu-berlin.de/> or http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_1.PDF

<http://farbe.li.tu-berlin.de/AE06/AE06F0NX.PDF> /PS; 3D-linearization, page 23/24
F: 3D-linearization AE06/AE06LF0NX.PDF /PS in file (F)

Test of visual linearized output of pictures A1W_{de} to A3W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of the radial grating according to picture A1W_{de}

N-W-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2W_{de}
Are the 5 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 5 steps:

Test of 16 visual equidistant L*-grey steps according to picture A3W_{de}
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? Steps
of the given 16 steps:

part 1, AE060-3de: 110561

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_1.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_1.PS underline: Yes/No

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the output: underline: monitor/data projector/printer
Device model, driver and version:.....

output with PDF/PS-file: underline: PDF/PS file

For output with PDF file AE06F0PX_CYN1_1.PDF
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For output with PS file AE06F0PX_CYN1_1.PS
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: e. g. output of Landscape (L)

.....
.....
.....

part 3, AE060-7de: 110561

Form A: Test chart AE06 according to ISO 9241-306
achromatic test chart N

Test of visual linearized output of pictures A4W_{de} to A6W_{de} please underline Yes/No
Output test with computer display () or the external display () please mark by (x)!

Test of Landolt rings N-W according to picture A4W_{de}
Is the recognition frequency of the Landolt rings > 50% (5 of 8 at least)?

background - ring

0 - 1	Yes/No
7 - 8	Yes/No
E - F	Yes/No
2 - 0	Yes/No
8 - 6	Yes/No
F - D	Yes/No

Test of the radial grating under 45° according to picture A5W_{de}

Can equally spaced lines be seen? Yes/No
Visual testing: for radial diameter from 15 to 60 lpi Yes/No
Test with magnifying glass (e.g. 6x) - from 15 to lpi

Test of the radial grating under 90° according to picture A6W_{de}

Can equally spaced lines be seen? Yes/No
Visual testing: for radial diameter from 15 to 60 lpi Yes/No
Test with magnifying glass (e.g. 6x) - from 15 to lpi

part 2, AE061-3de: 110561

Documentation of assessor colour-vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline: Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline: Yes/unknown
or with test charts using colour points according to Ishihara underline: Yes/unknown
or tested with, please specify: underline: Yes/unknown

For visual evaluation of the display (Monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) underline: Yes/No

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_3.PDF underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_3.PS underline: Yes/No

picture A7_{de} contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline: Yes/No

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_3.PDF underline: Yes/No

picture A7_{de} underline: Yes/No

PS file: http://farbe.li.tu-berlin.de/AE06/AE06F0PX_CYN1_3.PS or underline: Yes/No

picture A7_{de} or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline: Yes/No

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer

of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF underline: Yes/No

If No, please describe other method:

part 4, AE061-7de: 110561

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*

TUB Registration: 20190301-AE06/AE06L0FA.TXT /PS
application for measurement or viewing of display and print output

TUB material: code=th4ta


see similar files: <http://farbe.li.tu-berlin.de/AE06/AE06L0NA.TXT> / .PS
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

TUB Registration: 20190301-AE06/AE06L0FA.TXT / .PS
application for measurement or viewing of display and print output
TUB material: code=rha4ta

<i>i</i>	<i>LAB</i> [*] _{ref}	<i>l</i> [*] _{out}	<i>LAB</i> [*] _{out}	<i>LAB</i> [*] _{out-ref}	<i>ΔE</i> [*]	Start output S1
1	69,69 0,00 0,00	0,00 0,00	69,69 0,00 0,00	0,00 0,00 0,00	0,01	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
2	71,41 0,00 0,00	0,00 0,00	69,75 0,00 0,00	-1, 0,00 0,00	1,65	
3	73,12 0,00 0,00	0,00 0,01	69,96 0,00 0,00	-3, 0,00 0,00	3,15	
4	74,83 0,00 0,00	0,00 0,02	70,37 0,00 0,00	-4, 0,00 0,00	4,46	
5	76,55 0,00 0,00	0,00 0,05	70,99 0,00 0,00	-5, 0,00 0,00	5,56	
6	78,26 0,00 0,00	0,00 0,08	71,84 0,00 0,00	-6, 0,00 0,00	6,42	
7	79,98 0,00 0,00	0,00 0,12	72,93 0,00 0,00	-7, 0,00 0,00	7,04	
8	81,69 0,00 0,00	0,00 0,17	74,28 0,00 0,00	-7, 0,00 0,00	7,40	
9	83,41 0,00 0,00	0,00 0,24	75,90 0,00 0,00	-7, 0,00 0,00	7,50	
10	85,12 0,00 0,00	0,00 0,31	77,80 0,00 0,00	-7, 0,00 0,00	7,32	
11	86,83 0,00 0,00	0,00 0,39	79,98 0,00 0,00	-6, 0,00 0,00	6,85	
12	88,55 0,00 0,00	0,00 0,49	82,45 0,00 0,00	-6, 0,00 0,00	6,09	
13	90,26 0,00 0,00	0,00 0,60	85,22 0,00 0,00	-5, 0,00 0,00	5,04	
14	91,98 0,00 0,00	0,00 0,72	88,30 0,00 0,00	-3, 0,00 0,00	3,67	Mean lightness difference (16 steps) <i>ΔE</i> [*] _{CIELAB} = 4,6
15	93,69 0,00 0,00	0,00 0,85	91,69 0,00 0,00	-1, 0,00 0,00	1,99	
16	95,41 0,00 0,00	0,00 1,00	95,41 0,00 0,00	0,00 0,00 0,01	0,01	
17	69,69 0,00 0,00	0,00 0,00	69,69 0,00 0,00	0,00 0,00 0,00	0,01	Mean lightness difference (5 steps) <i>ΔL</i> [*] _{CIELAB} = 3,7
18	76,12 0,00 0,00	0,00 0,04	70,81 0,00 0,00	-5, 0,00 0,00	5,30	
19	82,55 0,00 0,00	0,00 0,20	75,06 0,00 0,00	-7, 0,00 0,00	7,48	
20	88,98 0,00 0,00	0,00 0,52	83,11 0,00 0,00	-5, 0,00 0,00	5,86	
21	95,41 0,00 0,00	0,00 1,00	95,41 0,00 0,00	0,00 0,00 0,01	0,01	
Mean colour reproduction index: <i>R</i> [*] _{ab,m} = 79,6						

part 1,

AE060-3de: 110562

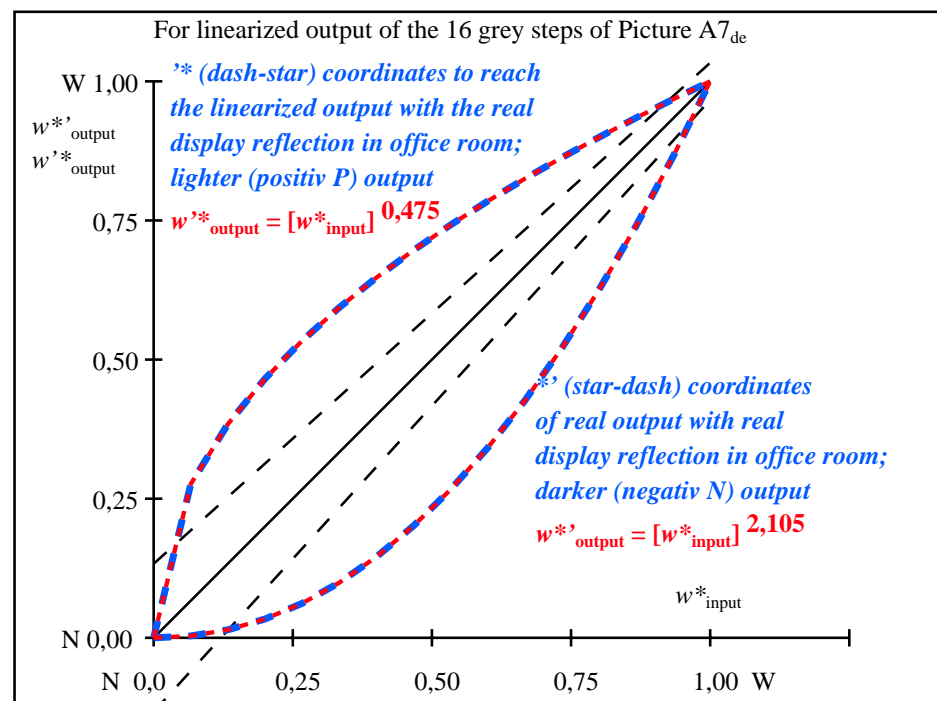

part 2,

AE061-3de: 110562

$L^*/Y_{intended}$ (absolute)	69,6/40,3	71,4/42,7	73,1/45,3	74,8/48,0	76,5/50,7	78,2/53,6	79,9/56,6	81,6/59,7	83,4/62,9	85,1/66,2	86,8/69,6	88,5/73,2	90,2/76,8	91,9/80,6	93,6/84,5	95,4/88,5
0 0 0 n* setcmyk																
gN=2,105 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,003	0,014	0,033	0,062	0,098	0,145	0,201	0,265	0,341	0,426	0,520	0,625	0,740	0,864	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

AE060-7de: 110562

In-out: Test chart AE06 according to ISO 9241-306
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N -range 30 to <60

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor