

see similar files: <http://farbe.li.tu-berlin.de/AE26/AE26F0PX.PDF> / .PS; 3D-linearization, page 18/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01
2	41,81 0,00 0,00	0,24	51,79 0,00 0,00	9,97 0,00 0,00	9,97
3	45,64 0,00 0,00	0,34	57,87 0,00 0,00	12,22 0,00 0,00	12,22
4	49,47 0,00 0,00	0,42	62,60 0,00 0,00	13,13 0,00 0,00	13,13
5	53,29 0,00 0,00	0,49	66,62 0,00 0,00	13,32 0,00 0,00	13,32
6	57,12 0,00 0,00	0,56	70,19 0,00 0,00	13,06 0,00 0,00	13,06
7	60,95 0,00 0,00	0,61	73,43 0,00 0,00	12,48 0,00 0,00	12,48
8	64,78 0,00 0,00	0,66	76,43 0,00 0,00	11,65 0,00 0,00	11,65
9	68,61 0,00 0,00	0,71	79,23 0,00 0,00	10,62 0,00 0,00	10,62
10	72,44 0,00 0,00	0,76	81,87 0,00 0,00	9,43 0,00 0,00	9,43
11	76,26 0,00 0,00	0,80	84,37 0,00 0,00	8,10 0,00 0,00	8,10
12	80,09 0,00 0,00	0,84	86,76 0,00 0,00	6,66 0,00 0,00	6,66
13	83,92 0,00 0,00	0,88	89,04 0,00 0,00	5,12 0,00 0,00	5,12
14	87,75 0,00 0,00	0,92	91,24 0,00 0,00	3,49 0,00 0,00	3,49
15	91,58 0,00 0,00	0,96	93,36 0,00 0,00	1,78 0,00 0,00	1,78
16	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01
17	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01
18	52,34 0,00 0,00	0,48	65,66 0,00 0,00	13,32 0,00 0,00	13,32
19	66,69 0,00 0,00	0,69	77,85 0,00 0,00	11,15 0,00 0,00	11,15
20	81,05 0,00 0,00	0,85	87,34 0,00 0,00	6,28 0,00 0,00	6,28
21	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01

Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 8,1$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6,1$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 64,5$

part 1,

AE260-3de: 11052

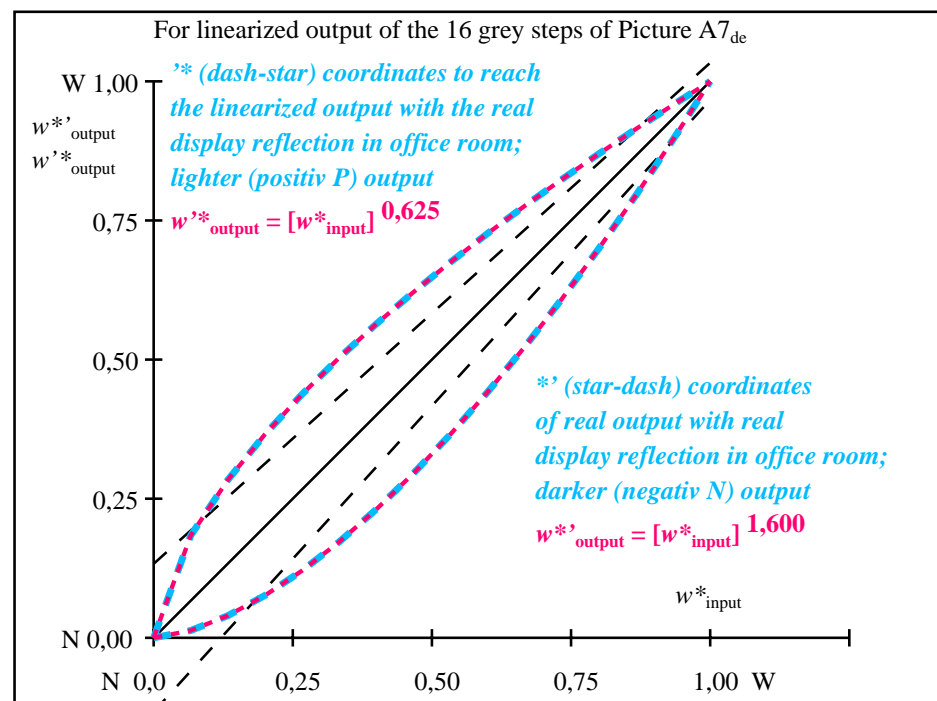

part 2,

AE261-3de: 11052

L^*/Y_{intended} (absolute)	37,9/10,0	41,8/12,3	45,6/15,0	49,4/17,9	53,2/21,3	57,1/25,0	60,9/29,1	64,7/33,7	68,6/38,8	72,4/44,3	76,2/50,3	80,0/56,8	83,9/63,9	87,7/71,5	91,5/79,7	95,4/88,5
0 0 0 n*																
setcmyk																
gp=0,625																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}	0,000	0,184	0,283	0,365	0,438	0,502	0,564	0,621	0,674	0,726	0,776	0,823	0,869	0,914	0,957	1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

AE260-7de: 11052

In-out: Test chart AE26 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_N: Y_N=88,9:10; Y_N\text{-range } 7,5 \text{ to } <15$

input: $rgb/cmy0/000n/w$ set...
output: $\rightarrow rgb_{\text{de}}$ setrgbcolor

TUB Registration: 20190301-AE26/AE26L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta