





AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


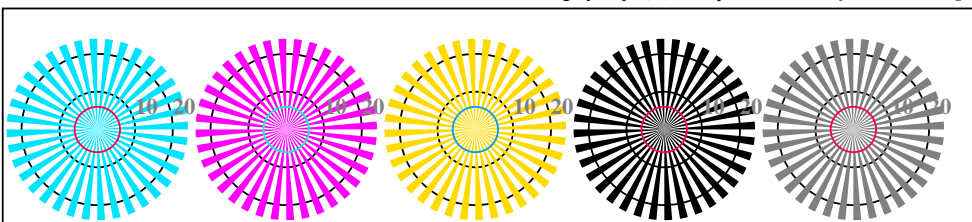


radial gratings W-Ce radial gratings W-Me radial gratings W-Je radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-Ce; W-Me; W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

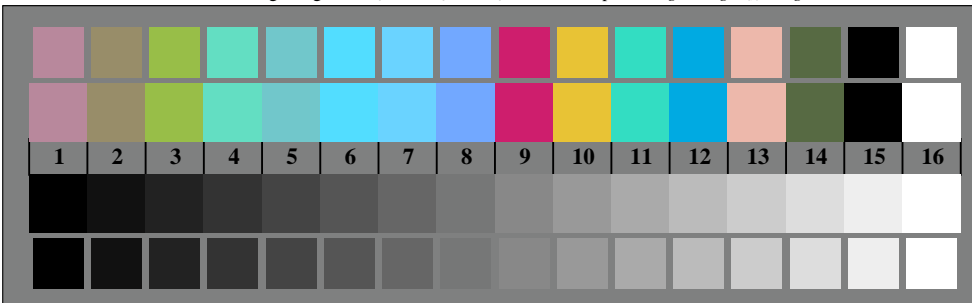


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

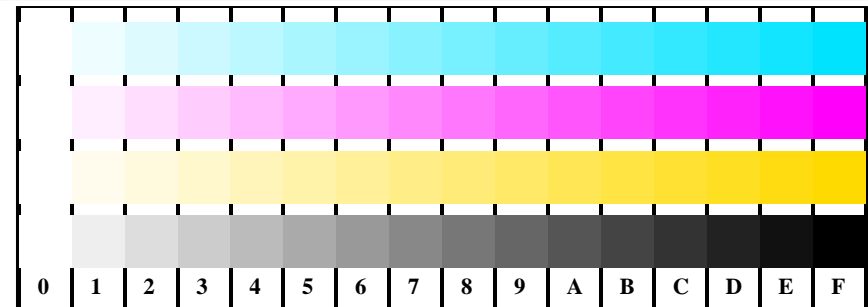


AE271-1, Picture B4W*de: 16 equidistant steps W-Ce; W-Me; W-Je; W-N; *rgb/cmy0->rgb*de setrgbcolor*

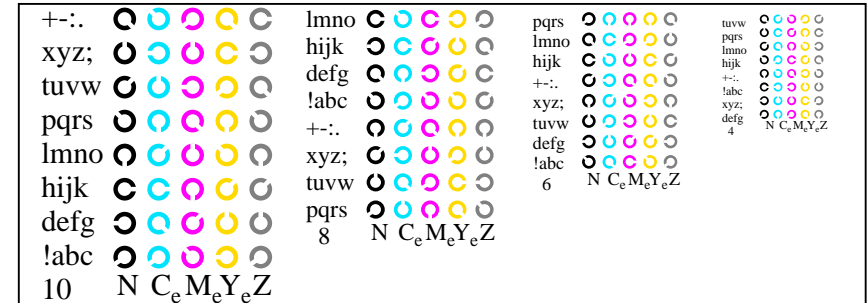

AE271-3, Picture B5W*de: Sript and Landolt-rings N; Ce; Me; Ye; Z; PS operator *rgb->rgb*de setrgbcolor*

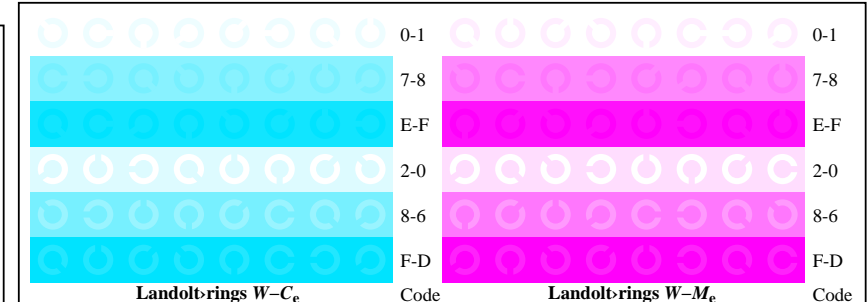

AE271-5, Picture B6W*de: Landolt-rings W-Ce; W-Me; PS operator *rgb->rgb*de setrgbcolor*

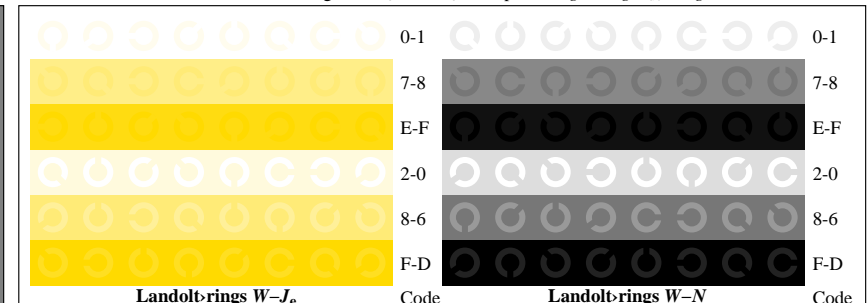

AE271-7, Picture B7W*de: Landolt-rings W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

part 1 AE270-3de: 11001

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY8_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY8_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY8_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY8_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-11001

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart *CMYK* output: *->rgb_{de} setrgbcolor*

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White – Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-M_d$ White – Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-Y_d$ White – Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-N$ White – Black:	If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 11001

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY8_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY8_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY8_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY8_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4 AE271-7de: 11001

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 3/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)


TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*
1	0,00	0,00	0,00	0,00	0,01
2	6,36	0,00	0,06	6,36	0,00
3	12,72	0,00	0,13	12,72	0,00
4	19,08	0,00	0,20	19,08	0,00
5	25,44	0,00	0,26	25,44	0,00
6	31,80	0,00	0,33	31,80	0,00
7	38,16	0,00	0,40	38,16	0,00
8	44,52	0,00	0,46	44,52	0,00
9	50,88	0,00	0,53	50,88	0,00
10	57,24	0,00	0,60	57,24	0,00
11	63,60	0,00	0,66	63,60	0,00
12	69,96	0,00	0,73	69,96	0,00
13	76,32	0,00	0,80	76,32	0,00
14	82,68	0,00	0,86	82,68	0,00
15	89,04	0,00	0,93	89,04	0,00
16	95,41	0,00	1,00	95,41	0,00
17	0,00	0,00	0,00	0,00	0,01
18	23,85	0,00	0,25	23,85	0,00
19	47,70	0,00	0,50	47,70	0,00
20	71,55	0,00	0,75	71,55	0,00
21	95,41	0,00	1,00	95,41	0,00

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0,0$
Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0,0$
Mean colour reproduction index: $R^*_{ab,m} = 99,9$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 11002

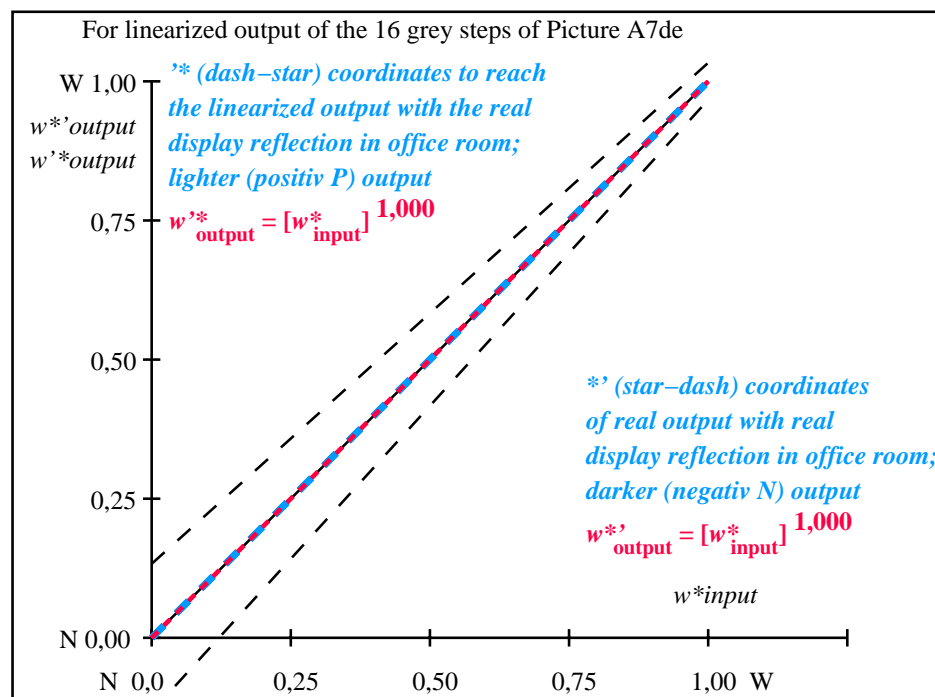

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 11002

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
0 0 0 n* setcmyk gp=1.0 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0


AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N -range 0,0 to <0,46

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor



AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


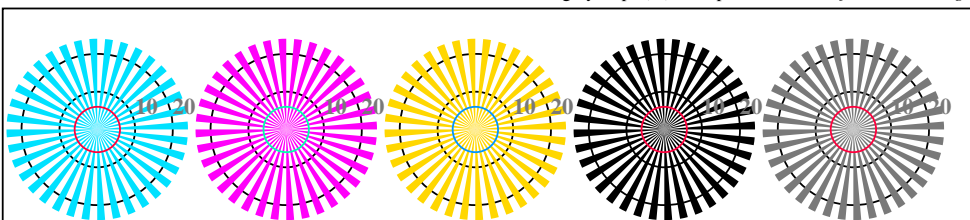


radial gratings W-Ce radial gratings W-Me radial gratings W-Je radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-Ce; W-Me; W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*




AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

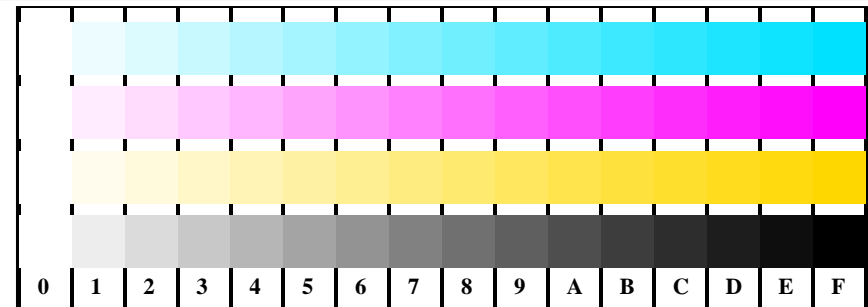


AE271-1, Picture B4W*de: 16 equidistant steps W-Ce; W-Me; W-Je; W-N; *rgb/cmy0->rgb*de setrgbcolor*

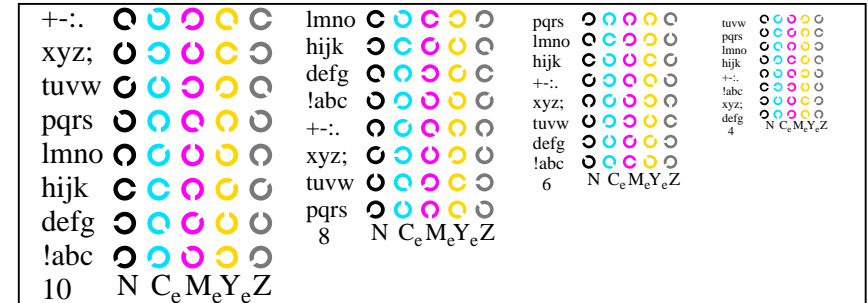

AE271-3, Picture B5W*de: Sript and Landolt-rings N; Ce; Me; Ye; Z; PS operator *rgb->rgb*de setrgbcolor*

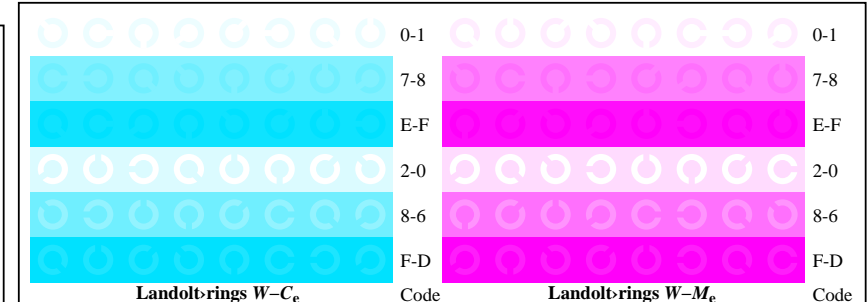

AE271-5, Picture B6W*de: Landolt-rings W-Ce; W-Me; PS operator *rgb->rgb*de setrgbcolor*

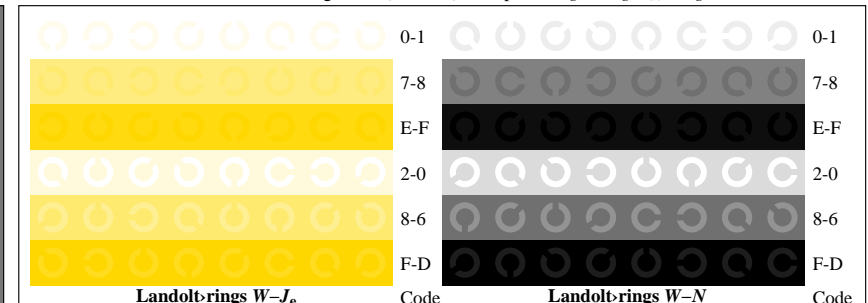

AE271-7, Picture B7W*de: Landolt-rings W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

part 1 AE270-3de: 11081

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY7_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY7_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY7_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY7_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-11081

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart *CMYK* output: *->rgb_{de} setrgbcolor*

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White – Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-M_d$ White – Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-Y_d$ White – Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-N$ White – Black:	If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 11081

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY7_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY7_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY7_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY7_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4 AE271-7de: 11081

TUB Registration: 20191001-AE27/AE27L0FA.TXT /PS
application for measurement or viewing of the output on display and print

TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 6/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*
1	5,69	0,00	0,00	0,00	0,00
2	11,67	0,00	0,04	9,36	0,00
3	17,65	0,00	0,09	14,01	0,00
4	23,63	0,00	0,14	19,12	0,00
5	29,61	0,00	0,21	24,55	0,00
6	35,59	0,00	0,27	30,23	0,00
7	41,57	0,00	0,33	36,12	0,00
8	47,55	0,00	0,40	42,19	0,00
9	53,54	0,00	0,47	48,42	0,00
10	59,52	0,00	0,54	54,79	0,00
11	65,50	0,00	0,61	61,29	0,00
12	71,48	0,00	0,69	67,91	0,00
13	77,46	0,00	0,76	74,64	0,00
14	83,44	0,00	0,84	81,47	0,00
15	89,42	0,00	0,92	88,39	0,00
16	95,41	0,00	1,00	95,41	0,00
17	5,69	0,00	0,00	5,69	0,00
18	28,12	0,00	0,19	23,16	0,00
19	50,55	0,00	0,44	45,28	0,00
20	72,98	0,00	0,71	69,58	0,00
21	95,41	0,00	1,00	95,41	0,00

Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 3,4$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 2,7$

Mean colour reproduction index: $R^*_{ab,m} = 84,9$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 11082

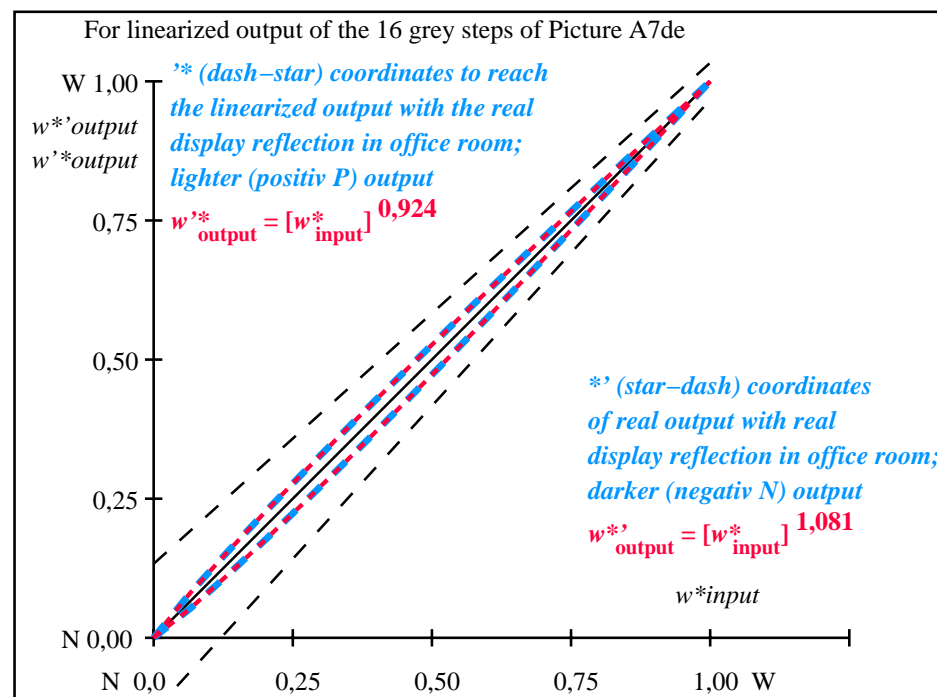

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 11082

$L^*/Y_{intended}$ (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
0 0 0 n* setcmyk gN=1.08 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,054	0,113	0,176	0,24	0,305	0,371	0,439	0,506	0,576	0,645	0,715	0,786	0,857	0,928	1,0


AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N -range 0,46 to <0,93

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor




AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


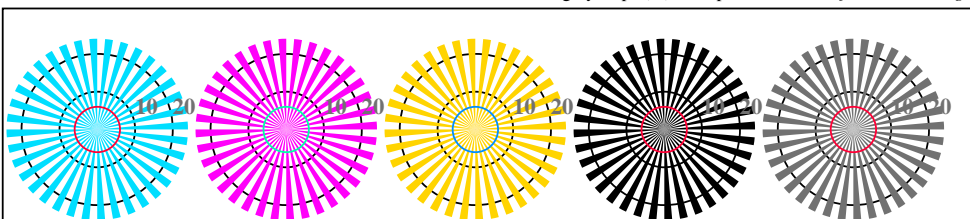


radial gratings W-Ce radial gratings W-Me radial gratings W-Je radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-Ce; W-Me; W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

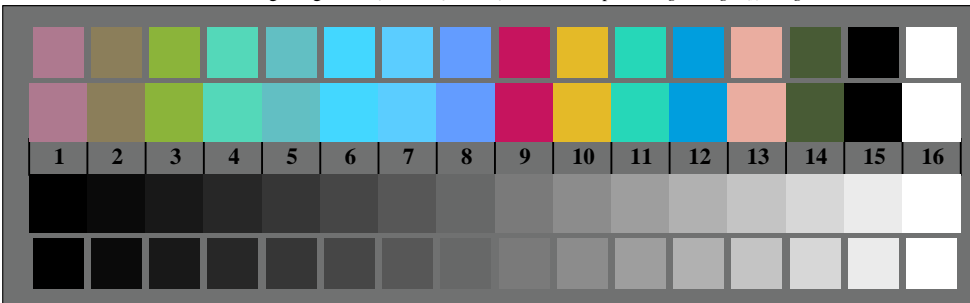


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

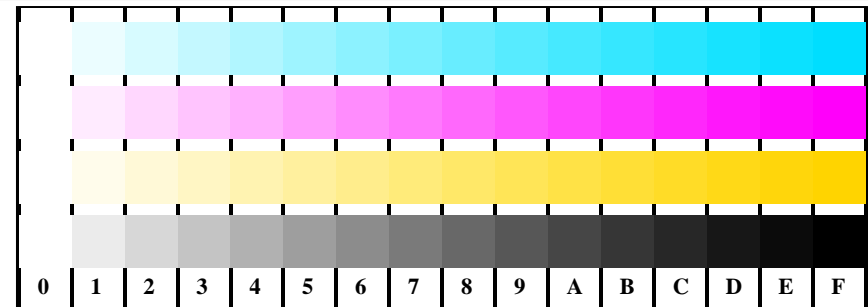


AE271-1, Picture B4W*de: 16 equidistant steps W-Ce; W-Me; W-Je; W-N; *rgb/cmy0->rgb*de setrgbcolor*

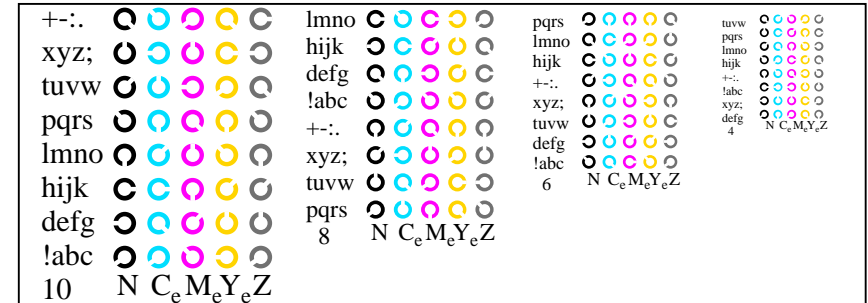

AE271-3, Picture B5W*de: Sript and Landolt-rings N; Ce; Me; Ye; Z; PS operator *rgb->rgb*de setrgbcolor*

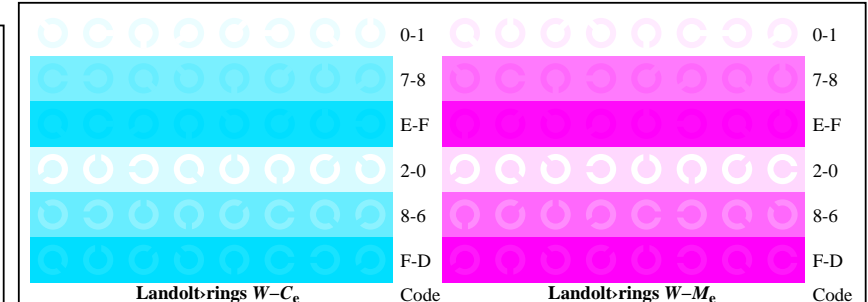

AE271-5, Picture B6W*de: Landolt-rings W-Ce; W-Me; PS operator *rgb->rgb*de setrgbcolor*

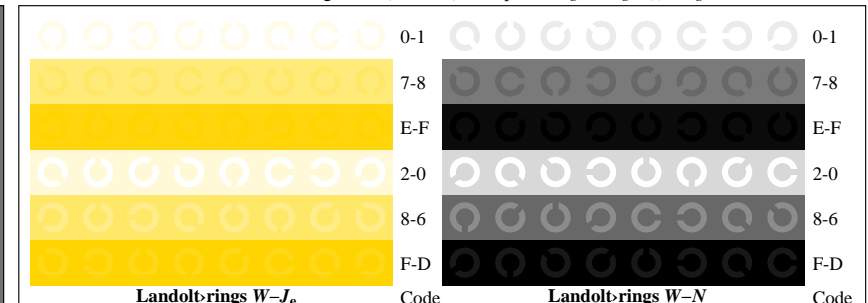

AE271-7, Picture B7W*de: Landolt-rings W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

part 1

AE270-3de: 110161

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY6_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY6_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY6_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY6_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3

AE270-7N*de-110161

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart *CMYK* output: *->rgb_{de} setrgbcolor*

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White – Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-M_d$ White – Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-Y_d$ White – Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-N$ White – Black:	If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2

AE271-3Nde: 110161

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY6_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY6_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY6_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY6_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4

AE271-7de: 110161

TUB Registration: 20191001-AE27/AE27L0FA.TXT /PS
application for measurement or viewing of the output on display and print

TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 9/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*	Start output S1
1	10,99	0,00	0,00	0,00	0,00	0,01
2	16,62	0,00	0,00	0,02	13,11	0,00
3	22,24	0,00	0,00	0,06	16,44	0,00
4	27,87	0,00	0,00	0,11	20,45	0,00
5	33,50	0,00	0,00	0,16	24,98	0,00
6	39,13	0,00	0,00	0,22	29,94	0,00
7	44,75	0,00	0,00	0,28	35,27	0,00
8	50,38	0,00	0,00	0,35	40,93	0,00
9	56,01	0,00	0,00	0,42	46,89	0,00
10	61,64	0,00	0,00	0,49	53,13	0,00
11	67,27	0,00	0,00	0,57	59,62	0,00
12	72,89	0,00	0,00	0,65	66,35	0,00
13	78,52	0,00	0,00	0,73	73,31	0,00
14	84,15	0,00	0,00	0,82	80,48	0,00
15	89,78	0,00	0,00	0,91	87,84	0,00
16	95,41	0,00	0,00	1,00	95,41	0,00
17	10,99	0,00	0,00	0,00	10,99	0,00
18	32,09	0,00	0,00	0,15	23,80	0,00
19	53,20	0,00	0,00	0,38	43,88	0,00
20	74,30	0,00	0,00	0,67	68,07	0,00
21	95,41	0,00	0,00	1,00	95,41	0,00

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 6,0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 4,7$

Mean colour reproduction index:
 $R^*_{ab,m} = 73,7$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110162

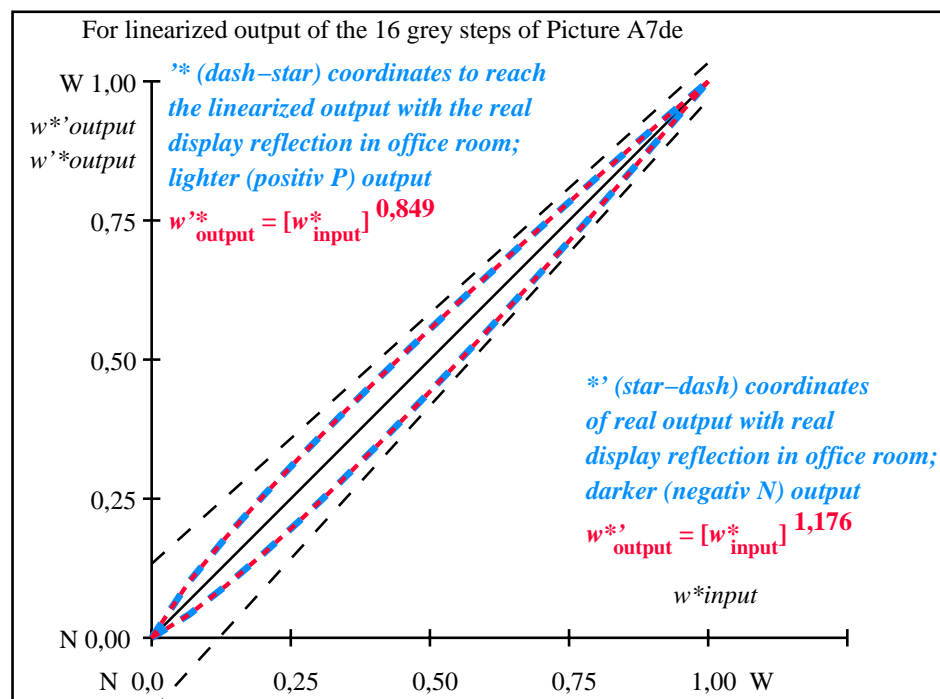

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110162

$L^*/Y_{intended}$ (absolute)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
0 0 0 n*																
setcmyk																
$g_N=1.18$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,042	0,093	0,151	0,211	0,274	0,34	0,408	0,533	0,548	0,621	0,694	0,769	0,845	0,922	1,0

AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N -range 0,93 to <1,87

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta




AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


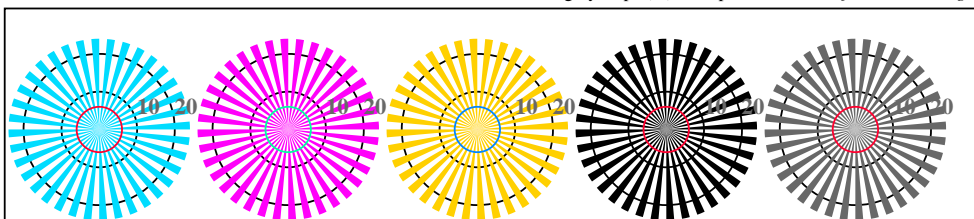


radial gratings W-Ce radial gratings W-Me radial gratings W-Je radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-Ce; W-Me; W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

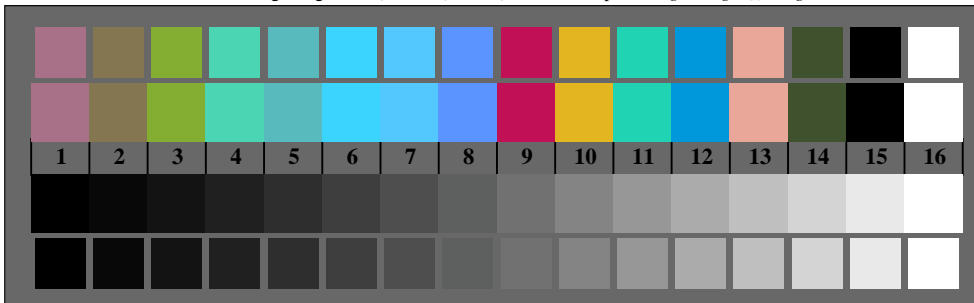


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

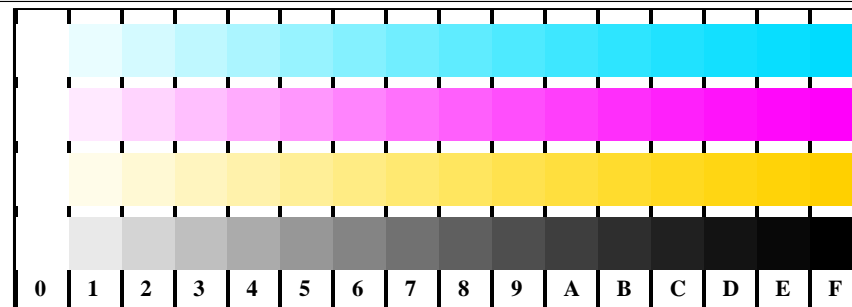


AE271-1, Picture B4W*de: 16 equidistant steps W-Ce; W-Me; W-Je; W-N; *rgb/cmy0->rgb*de setrgbcolor*

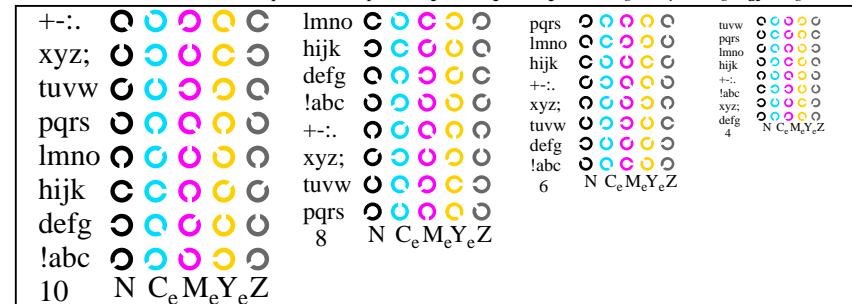

AE271-3, Picture B5W*de: Sript and Landolt-rings N; Ce; Me; Ye; Z; PS operator *rgb->rgb*de setrgbcolor*

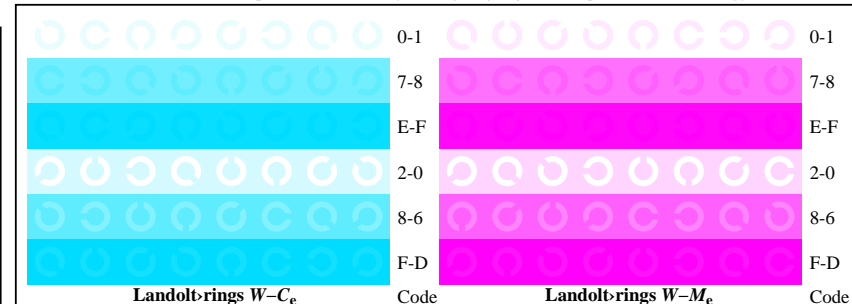

AE271-5, Picture B6W*de: Landolt-rings W-Ce; W-Me; PS operator *rgb->rgb*de setrgbcolor*

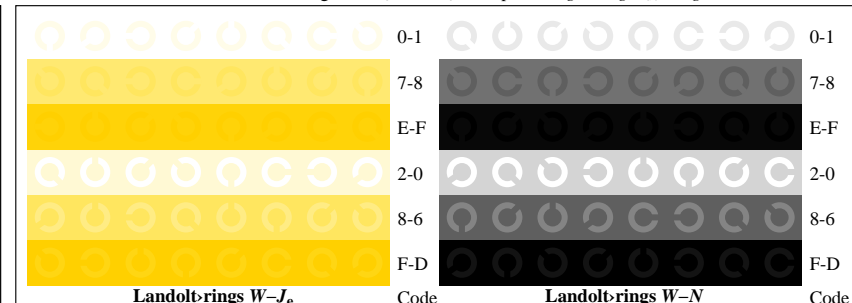

AE271-7, Picture B7W*de: Landolt-rings W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

part 1 AE270-3de: 110241

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY5_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY5_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY5_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY5_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-110241

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart *CMYK* output: *->rgb_{de} setrgbcolor*

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	If No: How many steps can be distinguished?	of the given 16 steps	Yes/No
$W-C_d$ White – Cyanblue:	Are all the 16 steps distinguishable?	Steps	Yes/No
$W-M_d$ White – Magentared:	Are all the 16 steps distinguishable?	Steps	Yes/No
$W-Y_d$ White – Yellow:	Are all the 16 steps distinguishable?	Steps	Yes/No
$W-N$ White – Black:	Are all the 16 steps distinguishable?	Steps	Yes/No

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 110241

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY5_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY5_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

*Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY5_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY5_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4 AE271-7de: 110241

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 12/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*
1	18,00	0,00	0,00	0,00	0,00
2	23,16	0,00	0,01	19,20	0,00
3	28,32	0,00	0,04	21,48	0,00
4	33,48	0,00	0,08	24,50	0,00
5	38,64	0,00	0,13	28,11	0,00
6	43,80	0,00	0,18	32,26	0,00
7	48,96	0,00	0,24	36,88	0,00
8	54,12	0,00	0,30	41,94	0,00
9	59,28	0,00	0,37	47,40	0,00
10	64,44	0,00	0,45	53,25	0,00
11	69,60	0,00	0,53	59,46	0,00
12	74,76	0,00	0,62	66,01	0,00
13	79,92	0,00	0,70	72,90	0,00
14	85,08	0,00	0,80	80,10	0,00
15	90,24	0,00	0,89	87,60	0,00
16	95,41	0,00	1,00	95,41	0,00
17	18,00	0,00	0,00	18,00	0,00
18	37,35	0,00	0,11	27,16	0,00
19	56,70	0,00	0,34	44,62	0,00
20	76,05	0,00	0,64	67,70	0,00
21	95,41	0,00	1,00	95,41	0,00

Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 7,6$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6,1$

Mean colour reproduction index: $R^*_{ab,m} = 66,3$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110242

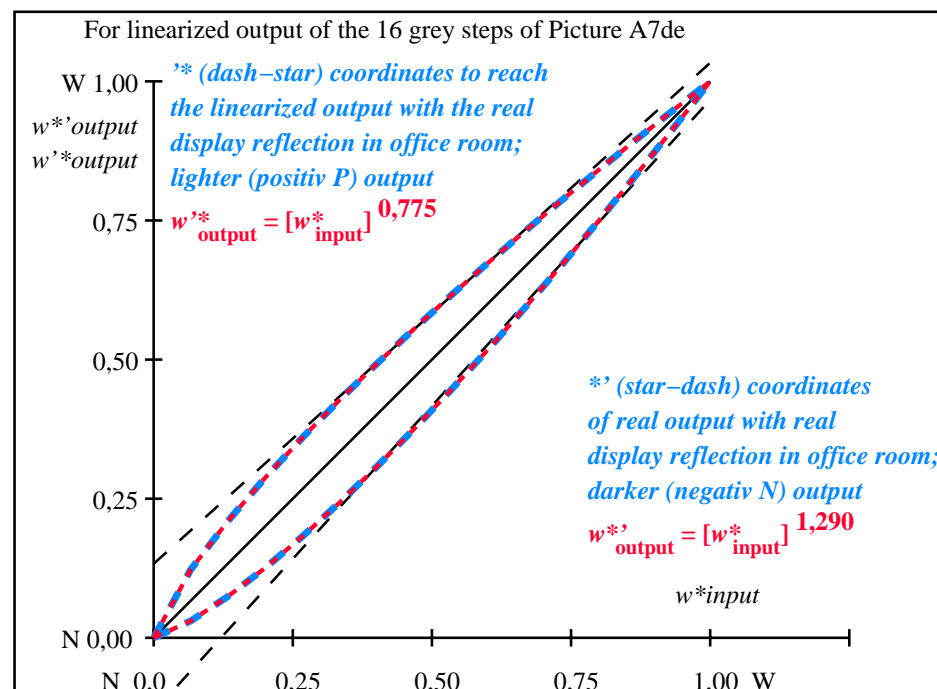

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110242

L^*/Y_{intended} (absolute)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
0 0 0 n* setcmyk gN=1.29 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,031	0,074	0,125	0,182	0,242	0,307	0,374	0,444	0,517	0,593	0,67	0,75	0,832	0,914	1,0

AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N -range 1,87 to <3,75

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27.F0NX.PDF>
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>




AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


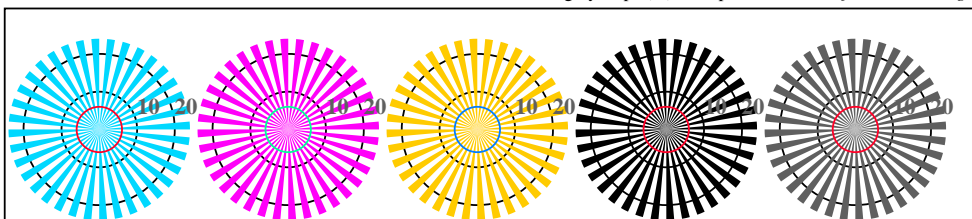


radial gratings W-C_e radial gratings W-M_e radial gratings W-J_e radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-C_e; W-M_e; W-J_e; W-N; PS operator *rgb->rgb*de setrgbcolor*

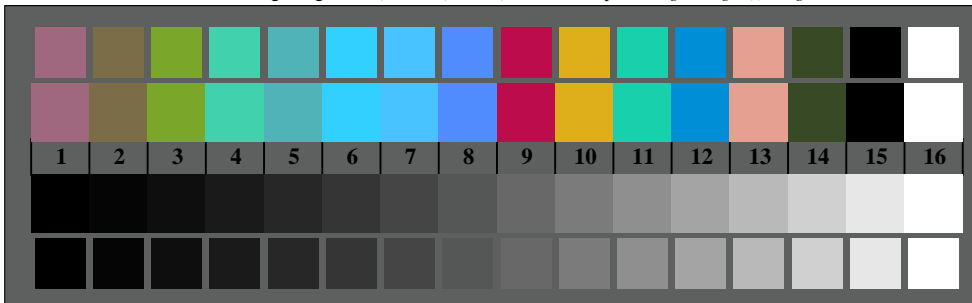


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

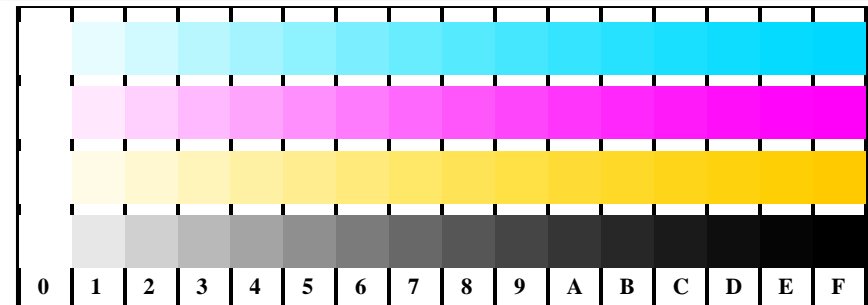


AE271-1, Picture B4W*de: 16 equidistant steps W-C_e; W-M_e; W-J_e; W-N; *rgb/cmy0->rgb*de setrgbcolor*

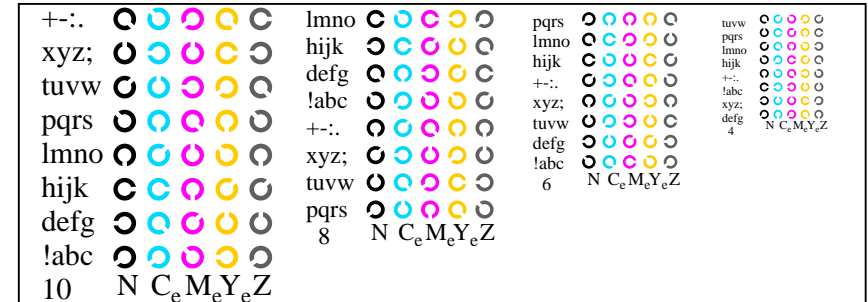

AE271-3, Picture B5W*de: Sript and Landolt-rings N; C_e; M_e; Y_e; Z; PS operator *rgb->rgb*de setrgbcolor*

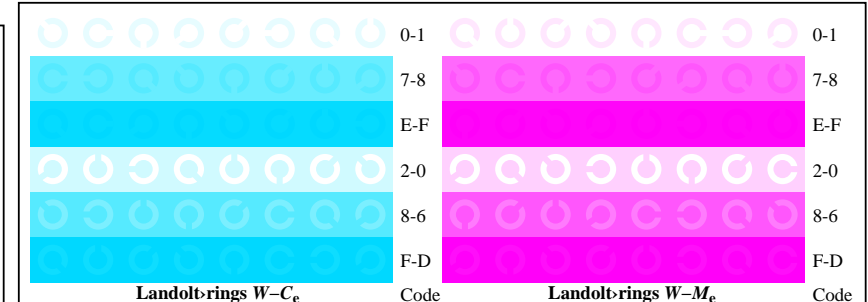

AE271-5, Picture B6W*de: Landolt-rings W-C_e; W-M_e; PS operator *rgb->rgb*de setrgbcolor*

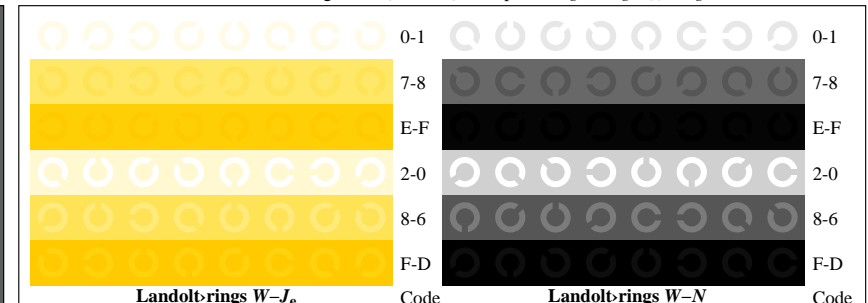

AE271-7, Picture B7W*de: Landolt-rings W-J_e; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

part 1 AE270-3de: 110321

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY4_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY4_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY4_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY4_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....

part 3 AE270-7N*de-110321

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: $rgb/cmy0/000n/w$ set...
chromatic test chart CMYK output: $->rgb_{de}$ setrgbcolor

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White - Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-M_d$ White - Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-Y_d$ White - Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-N$ White - Black:	If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$	Colour row $W-M_d$	Colour row $W-Y_d$	Colour row $W-N$
background - ring	background - ring	background - ring	background - ring
0 - 1	0 - 1	0 - 1	0 - 1
7 - 8	7 - 8	7 - 8	7 - 8
E - F	E - F	E - F	E - F
2 - 0	2 - 0	2 - 0	2 - 0
8 - 6	8 - 6	8 - 6	8 - 6
F - D	F - D	F - D	F - D

part 2 AE271-3Nde: 110321

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY4_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY4_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY4_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY4_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF

Exchange of CIELAB data in file http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT and transfer

of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4 AE271-7de: 110321

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 15/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*	Start output S1
1	26,84	0,00	0,00	0,00	0,00	0,01
2	31,41	0,00	0,00	27,49	0,00	3,92
3	35,98	0,00	0,03	28,99	0,00	6,99
4	40,56	0,00	0,06	31,15	0,00	9,40
5	45,13	0,00	0,10	33,90	0,00	11,22
6	49,70	0,00	0,15	37,21	0,00	12,49
7	54,27	0,00	0,20	41,02	0,00	13,24
8	58,84	0,00	0,26	45,33	0,00	13,51
9	63,41	0,00	0,33	50,10	0,00	13,31
10	67,98	0,00	0,41	55,32	0,00	12,65
11	72,55	0,00	0,49	60,98	0,00	11,57
12	77,12	0,00	0,58	67,06	0,00	10,06
13	81,69	0,00	0,68	73,55	0,00	8,14
14	86,26	0,00	0,78	80,45	0,00	5,81
15	90,83	0,00	0,88	87,73	0,00	3,10
16	95,41	0,00	1,00	95,41	0,00	0,01
17	26,84	0,00	0,00	26,84	0,00	0,01
18	43,98	0,00	0,09	33,16	0,00	10,82
19	61,12	0,00	0,30	47,66	0,00	13,46
20	78,26	0,00	0,60	68,64	0,00	9,62
21	95,41	0,00	1,00	95,41	0,00	0,01

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 8,4$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6,7$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 62,8$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110322

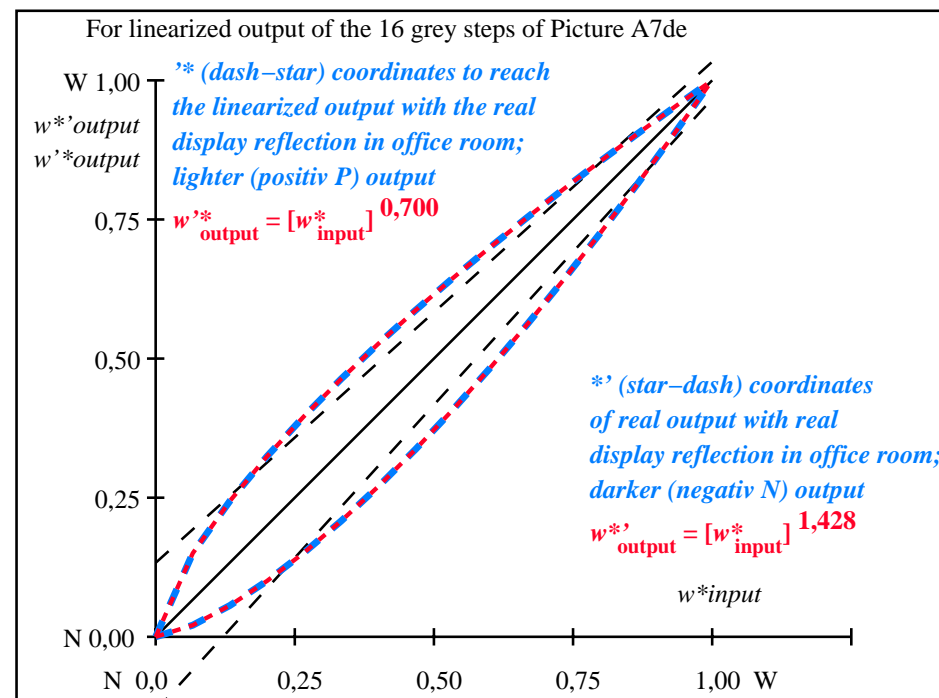

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110322

L^*/Y_{intended} (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
0 0 0 n*																
setcmyk																
gN=1.43																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,021	0,056	0,1	0,152	0,208	0,27	0,337	0,407	0,482	0,561	0,642	0,727	0,816	0,906	1,0

AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N -range 3,75 to <7,5

input: $rgb/cmy0/000n/w$ set...
output: $\rightarrow rgb_{\text{de}}$ setrgbcolor

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS;
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE.HTM>




AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage


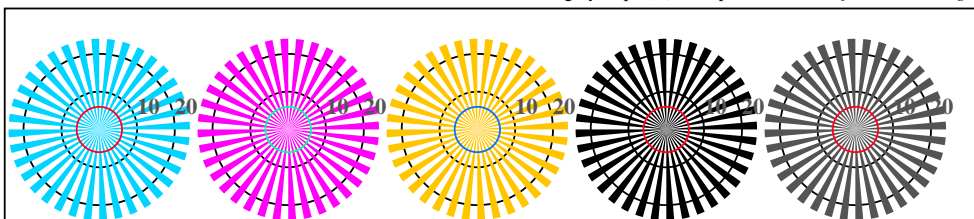


radial gratings W-C_e radial gratings W-M_e radial gratings W-J_e radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-C_e; W-M_e; W-J_e; W-N; PS operator *rgb->rgb*de setrgbcolor*

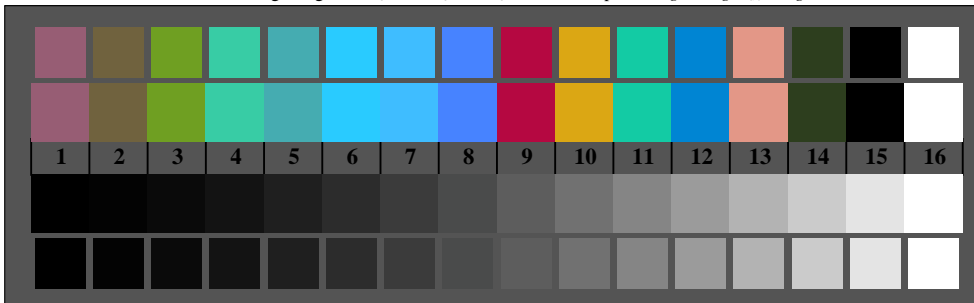


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*

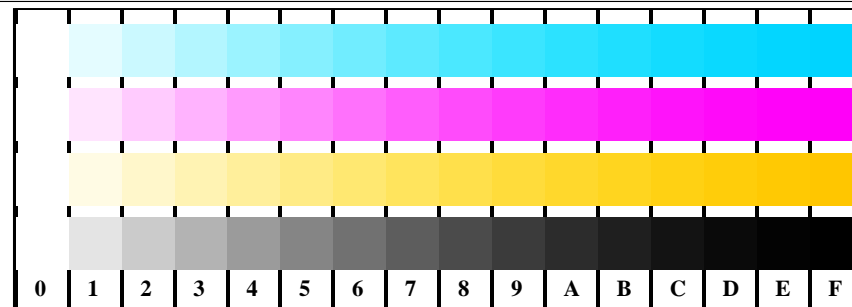


AE271-1, Picture B4W*de: 16 equidistant steps W-C_e; W-M_e; W-J_e; W-N; *rgb/cmy0->rgb*de setrgbcolor*

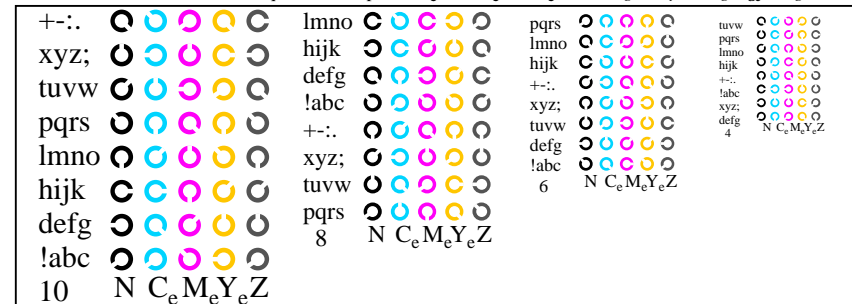

AE271-3, Picture B5W*de: Sript and Landolt-rings N; C_e; M_e; Y_e; Z; PS operator *rgb->rgb*de setrgbcolor*

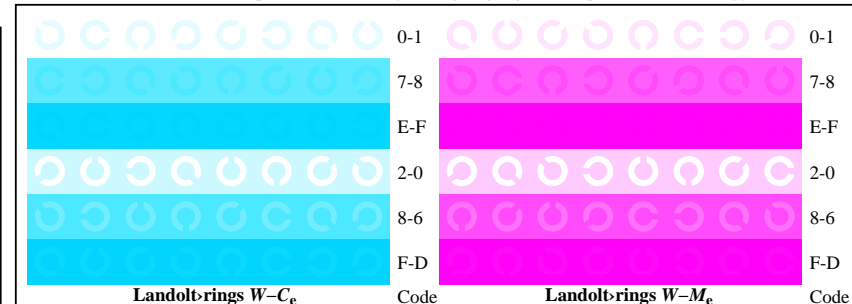

AE271-5, Picture B6W*de: Landolt-rings W-C_e; W-M_e; PS operator *rgb->rgb*de setrgbcolor*

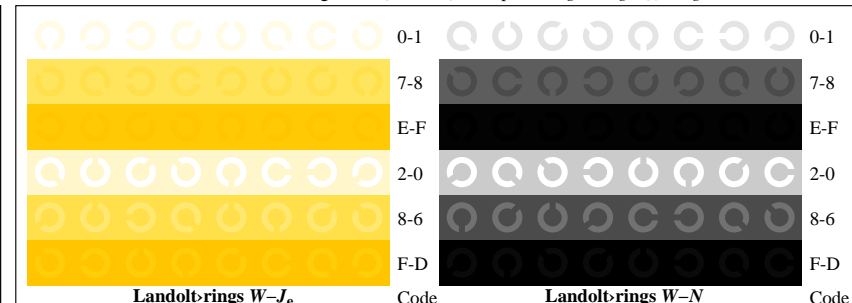

AE271-7, Picture B7W*de: Landolt-rings W-J_e; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS; 3D-linearization, page 17/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS in file (F)

<http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS; 3D-linearization, page 17/24
F: 3D-linearization AE27/AE27LF0NX.PDF /PS in file (F)

Test for the visual linearized output of pictures B1Wde to B3Wde
Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde
Is the resolution diameter < 6 mm? **Yes/No**
Test with magnifying glass (6x),
Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde
Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: Steps

part 1 AE270-3de: 110401

Documentation of file format, hardware and software for this test:
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY3_1.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY3_1.PS **or underline Yes/No**

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**
Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**
For device output with PDF-file AE27F0NX_CY3_1.PDF
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY3_1.PS
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-110401

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde
 $W-C_d$ White – Cyanblue: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-M_d$ White – Magentared: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-Y_d$ White – Yellow: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-N$ White – Black: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 110401

Documentation of assessor colour vision properties for visual assessment
The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output
Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY3_3.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY3_3.PS **underline Yes/No**
Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**
*Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY3_3.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY3_3.PS **or underline Yes/No**
picture A7de **underline Yes/No**

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**
If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**
If No, please describe other method:

part 4 AE271-7de: 110401

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart CMYK output: *->rgb_{de} setrgbcolor*

TUB Registration: 20191001-AE27/AE27L0FA.TXT /PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 18/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=rh4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*	Start output S1
1	37,98	0,00	0,00	37,98	0,00	0,00
2	41,81	0,00	0,00	38,32	0,00	0,00
3	45,64	0,00	0,02	39,23	0,00	0,00
4	49,47	0,00	0,04	40,68	0,00	0,00
5	53,29	0,00	0,08	42,64	0,00	0,00
6	57,12	0,00	0,12	45,10	0,00	0,00
7	60,95	0,00	0,17	48,05	0,00	0,00
8	64,78	0,00	0,23	51,48	0,00	0,00
9	68,61	0,00	0,30	55,37	0,00	0,00
10	72,44	0,00	0,37	59,74	0,00	0,00
11	76,26	0,00	0,46	64,56	0,00	0,00
12	80,09	0,00	0,55	69,83	0,00	0,00
13	83,92	0,00	0,65	75,56	0,00	0,00
14	87,75	0,00	0,76	81,73	0,00	0,00
15	91,58	0,00	0,87	88,35	0,00	0,00
16	95,41	0,00	1,00	95,41	0,00	0,00
17	37,98	0,00	0,00	37,98	0,00	0,00
18	52,34	0,00	0,07	42,10	0,00	0,00
19	66,69	0,00	0,26	53,37	0,00	0,00
20	81,05	0,00	0,57	71,22	0,00	0,00
21	95,41	0,00	1,00	95,41	0,00	0,00

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 8,3$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6,6$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 63,5$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110402

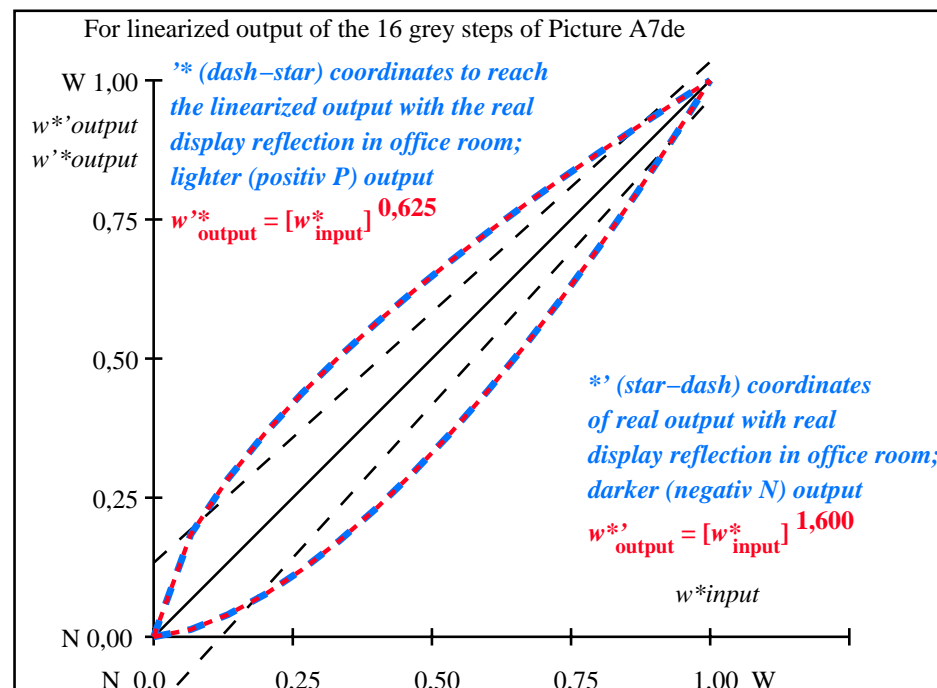

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110402

L^*/Y_{intended} (absolute)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
0 0 0 n*																
setcmk																
gN=1.6																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,013	0,04	0,076	0,121	0,172	0,231	0,296	0,365	0,442	0,523	0,608	0,7	0,796	0,895	1,0


AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmkcolor

In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N -range 7,5 to <15

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{\text{de}}$ setrgbcolor




AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage

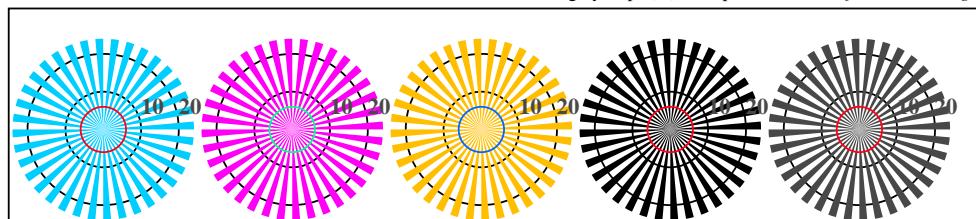


radial gratings W-Ce radial gratings W-Me radial gratings W-Je radial gratings W-N radial gratings W-Z


AE270-5, Picture B2W*de: radial gratings W-Ce; W-Me; W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

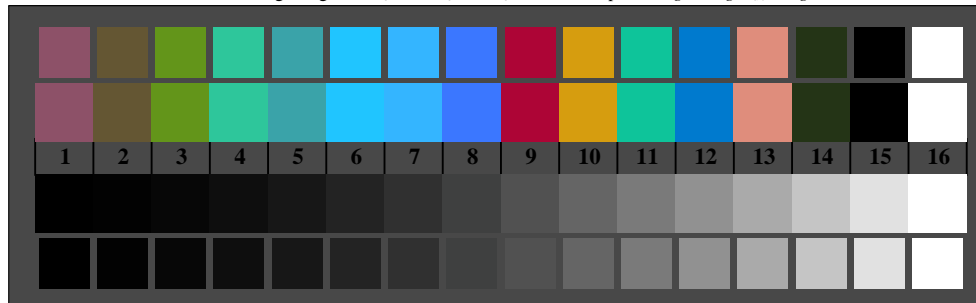


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0->rgb*de setrgbcolor*




Test chart AE27 according to test chart 2 of ISO/IEC 15775
chromatic test chart CMYK

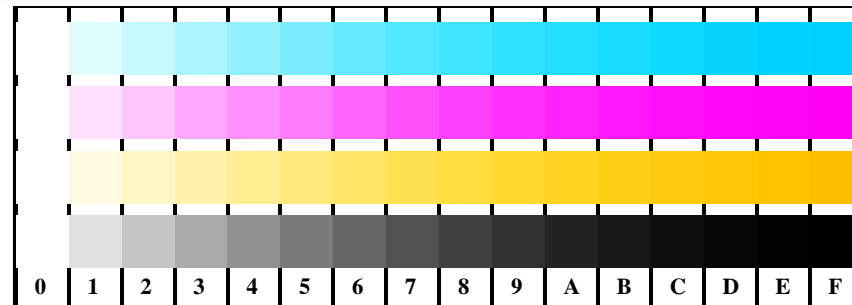


AE271-1, Picture B4W*de: 16 equidistant steps W-Ce; W-Me; W-Je; W-N; *rgb/cmy0->rgb*de setrgbcolor*

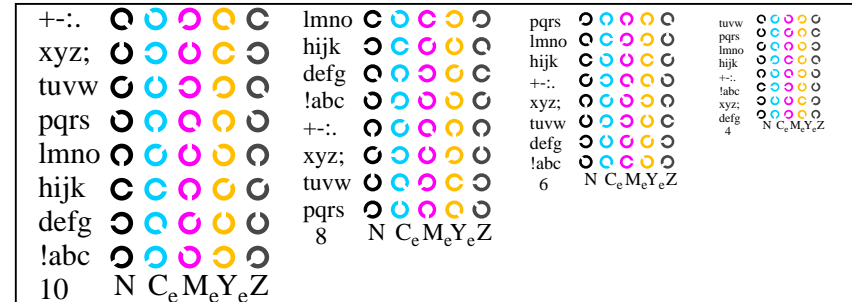

AE271-3, Picture B5W*de: Sript and Landolt-rings N; Ce; Me; Ye; Z; PS operator *rgb->rgb*de setrgbcolor*

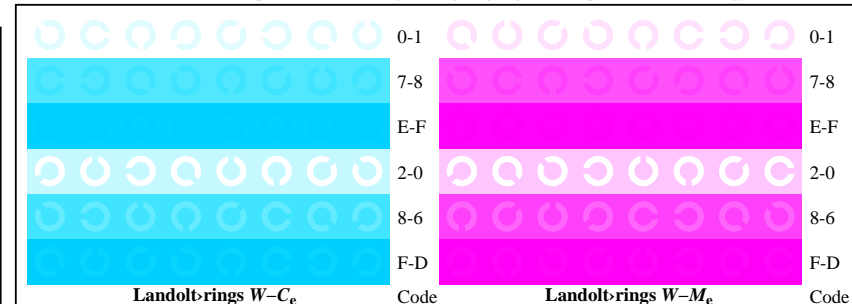

AE271-5, Picture B6W*de: Landolt-rings W-Ce; W-Me; PS operator *rgb->rgb*de setrgbcolor*

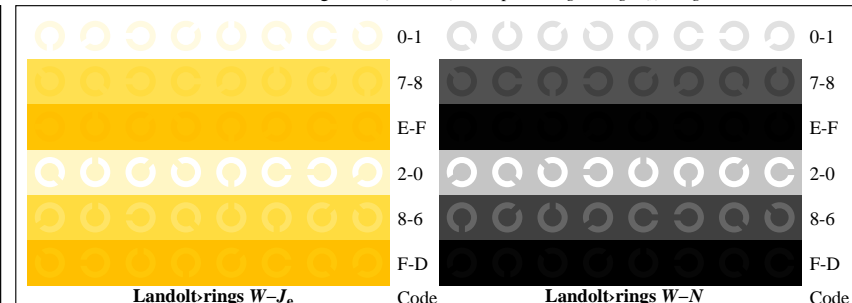

AE271-7, Picture B7W*de: Landolt-rings W-Je; W-N; PS operator *rgb->rgb*de setrgbcolor*

input: *rgb/cmy0/000n/w set...*
output: *->rgb*de setrgbcolor*

Test for the visual linearized output of pictures B1Wde to B3Wde

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: Steps

part 1 AE270-3de: 110481

Documentation of file format, hardware and software for this test:

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY2_1.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY2_1.PS **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file AE27F0NX_CY2_1.PDF

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY2_1.PS

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-110481

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: $rgb/cmy0/000n/w$ set...
chromatic test chart CMYK output: $->rgb_{de}$ setrgbcolor

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde

Colour row	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White – Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-M_d$ White – Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-Y_d$ White – Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps
$W-N$ White – Black:	If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 110481

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY2_3.PDF **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY2_3.PS **underline Yes/No**

Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY2_3.PDF

picture A7de **underline Yes/No**

PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY2_3.PS

picture A7de **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>

Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**

If No, please describe other method:

part 4 AE271-7de: 110481

TUB Registration: 20191001-AE27/AE27L0FA.TXT /PS
application for measurement or viewing of the output on display and print

TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 21/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=rh4ta

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*	Start output S1
1	52,01	0,00	0,00	52,01	0,00	0,00
2	54,91	0,00	0,00	52,17	0,00	0,00
3	57,80	0,00	0,01	52,67	0,00	0,00
4	60,69	0,00	0,03	53,54	0,00	0,00
5	63,58	0,00	0,06	54,79	0,00	0,00
6	66,48	0,00	0,10	56,43	0,00	0,00
7	69,37	0,00	0,14	58,46	0,00	0,00
8	72,26	0,00	0,20	60,90	0,00	0,00
9	75,16	0,00	0,27	63,75	0,00	0,00
10	78,05	0,00	0,34	67,01	0,00	0,00
11	80,94	0,00	0,43	70,68	0,00	0,00
12	83,83	0,00	0,52	74,78	0,00	0,00
13	86,73	0,00	0,62	79,29	0,00	0,00
14	89,62	0,00	0,74	84,23	0,00	0,00
15	92,51	0,00	0,86	89,60	0,00	0,00
16	95,41	0,00	1,00	95,41	0,00	0,00
17	52,01	0,00	0,00	52,01	0,00	0,00
18	62,86	0,00	0,05	54,44	0,00	0,00
19	73,71	0,00	0,23	62,28	0,00	0,00
20	84,56	0,00	0,54	75,87	0,00	0,00
21	95,41	0,00	1,00	95,41	0,00	0,00

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 7,1$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 5,7$

Mean colour reproduction index:
 $R^*_{ab,m} = 68,8$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110482

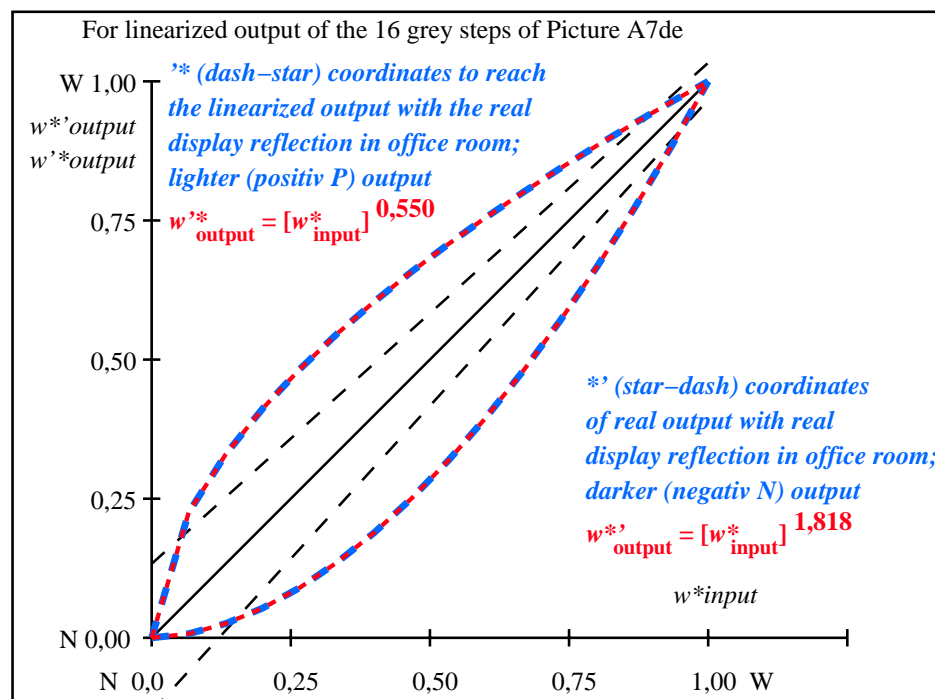

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110482

$L^*/Y_{intended}$ (absolute)	52.0/20.2	54.9/22.8	57.8/25.8	60.7/28.9	63.6/32.3	66.5/36.0	69.4/39.9	72.3/44.1	75.2/48.5	78.1/53.3	80.9/58.4	83.8/63.8	86.7/69.5	89.6/75.5	92.5/81.9	95.4/88.6
0 0 0 n*																
setcmyk																
gN=1.82																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,007	0,026	0,054	0,091	0,135	0,189	0,25	0,319	0,395	0,479	0,569	0,666	0,771	0,882	1,0


AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N -range 15 to <30


input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{de}$ setrgbcolor





AE270-3, Picture B1W*de: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 colorimage

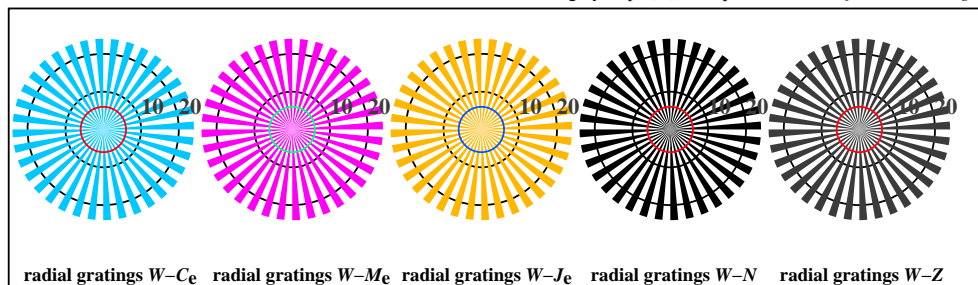


AE270-5, Picture B2W*de: radial gratings W-C_e; W-M_e; W-J_e; W-N; PS operator *rgb*->*rgb*de* *setrgbcolor*

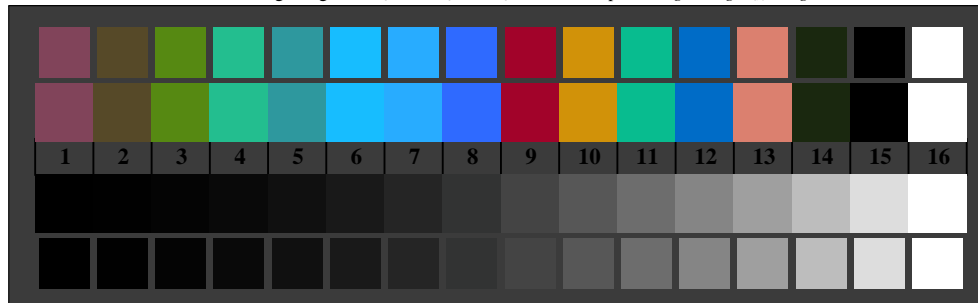


AE270-7, Picture B3W*de: 14 CIE-test colours and 2 + 16 grey steps (sf); *rgb/cmy0*->*rgb*de* *setrgbcolor*

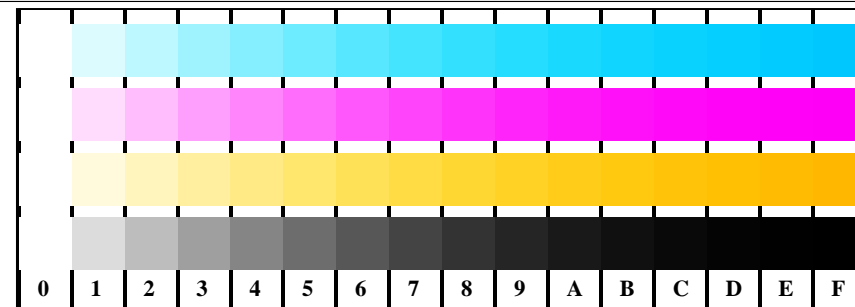


AE271-1, Picture B4W*de: 16 equidistant steps W-C_e; W-M_e; W-J_e; W-N; *rgb/cmy0*->*rgb*de* *setrgbcolor*

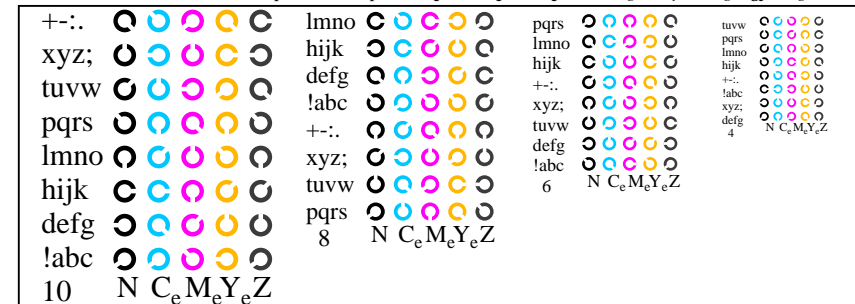

AE271-3, Picture B5W*de: Sript and Landolt-rings N; C_e; M_e; Y_e; Z; PS operator *rgb*->*rgb*de* *setrgbcolor*

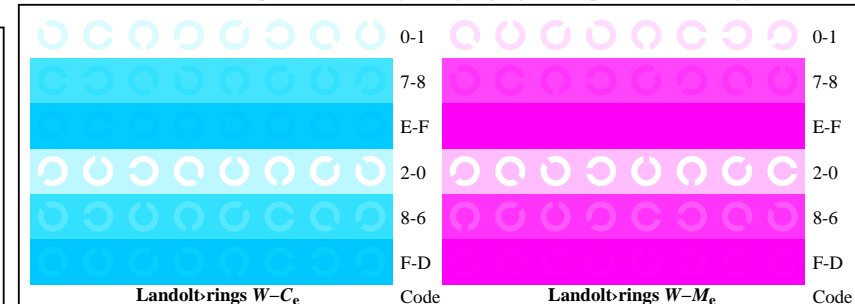

AE271-5, Picture B6W*de: Landolt-rings W-C_e; W-M_e; PS operator *rgb*->*rgb*de* *setrgbcolor*

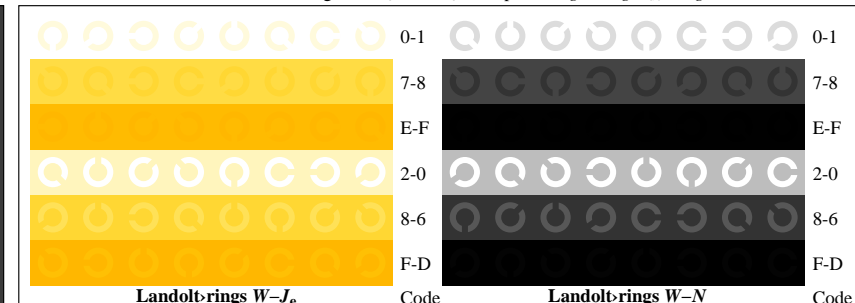

AE271-7, Picture B7W*de: Landolt-rings W-J_e; W-N; PS operator *rgb*->*rgb*de* *setrgbcolor*

input: *rgb/cmy0/000n/w* *set...*
output: ->*rgb*de* *setrgbcolor*

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS; 3D-linearization, page 23/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS in file (F)

<http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> /PS; 3D-linearization, page 23/24
F: 3D-linearization AE27/AE27LF0NX.PDF /PS in file (F)

Test for the visual linearized output of pictures B1Wde to B3Wde
Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1Wde
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2Wde
Is the resolution diameter < 6 mm? **Yes/No**
Test with magnifying glass (6x),
Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3Wde
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture B3Wde
Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: Steps

part 1 AE270-3de: 110561

Documentation of file format, hardware and software for this test:
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY1_1.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0NX_CY1_1.PS **or underline Yes/No**

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**
Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**
For device output with PDF-file AE27F0NX_CY1_1.PDF
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file AE27F0NX_CY1_1.PS
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

part 3 AE270-7N*de-110561

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4Wde
 $W-C_d$ White – Cyanblue: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-M_d$ White – Magentared: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-Y_d$ White – Yellow: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps
 $W-N$ White – Black: Are all the 16 steps distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps Steps

Test of characters and Landolt-rings in four sizes according to picture B5Wde
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6Wde, and B7Wde
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

part 2 AE271-3Nde: 110561

Documentation of assessor colour vision properties for visual assessment
The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output
Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY1_3.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY1_3.PS **underline Yes/No**
Picture A7de contrast range: (>F:0) (F:0) (D:0) (C:0) (A:0) (9:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**
*Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)*

Only for optional colorimetric specification with PDF/PS file output
PDF file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY1_3.PDF **underline Yes/No**
PS file: http://farbe.li.tu-berlin.de/AE27/AE27F0PX_CY1_3.PS **underline Yes/No**
picture A7de **underline Yes/No**
or underline Yes/No

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**
If No, please give other parameters:

Colorimetric specification for 17 step colours of <http://farbe.li.tu-berlin.de/OE70/OE70L1NP.PDF>
Exchange of CIELAB data in file <http://farbe.li.tu-berlin.de/AE82/AE82L0NP.TXT> and transfer of the PS file AE82L0NP.PS (= .TXT) to the PDF-file AE82L0NP.PDF **underline Yes/No**
If No, please describe other method:

part 4 AE271-7de: 110561

Form A: Test chart AE27 according to test chart 2 of ISO/IEC 15775 input: *rgb/cmy0/000n/w set...*
chromatic test chart *CMYK* output: *->rgb_{de} setrgbcolor*

TUB Registration: 20191001-AE27/AE27L0FA.TXT /PS
application for measurement or viewing of the output on display and print
TUB material: code=th4ta

see similar files: <http://farbe.li.tu-berlin.de/AE27/AE27F0NX.PDF> / .PS; 3D-linearization, page 24/24
technical information: <http://farbe.li.tu-berlin.de/AE27/AE27LF0NX.PDF> / .PS in file (F)

i	LAB*ref	l*out	LAB*out	LAB*out-ref	ΔE*	Start output S1
1	69,69	0,00	0,00	69,69	0,00	0,00
2	71,41	0,00	0,00	69,75	0,00	0,00
3	73,12	0,00	0,01	69,96	0,00	0,00
4	74,83	0,00	0,02	70,37	0,00	0,00
5	76,55	0,00	0,05	70,99	0,00	0,00
6	78,26	0,00	0,08	71,84	0,00	0,00
7	79,98	0,00	0,12	72,93	0,00	0,00
8	81,69	0,00	0,17	74,28	0,00	0,00
9	83,41	0,00	0,24	75,90	0,00	0,00
10	85,12	0,00	0,31	77,80	0,00	0,00
11	86,83	0,00	0,39	79,98	0,00	0,00
12	88,55	0,00	0,49	82,45	0,00	0,00
13	90,26	0,00	0,60	85,22	0,00	0,00
14	91,98	0,00	0,72	88,30	0,00	0,00
15	93,69	0,00	0,85	91,69	0,00	0,00
16	95,41	0,00	1,00	95,41	0,00	0,00
17	69,69	0,00	0,00	69,69	0,00	0,00
18	76,12	0,00	0,04	70,81	0,00	0,00
19	82,55	0,00	0,20	75,06	0,00	0,00
20	88,98	0,00	0,52	83,11	0,00	0,00
21	95,41	0,00	1,00	95,41	0,00	0,00

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 4,6$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 3,7$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 79,6$

part 1; Measure: unknown; Device: unknown; Date: unknown

AE270-3de: 110562

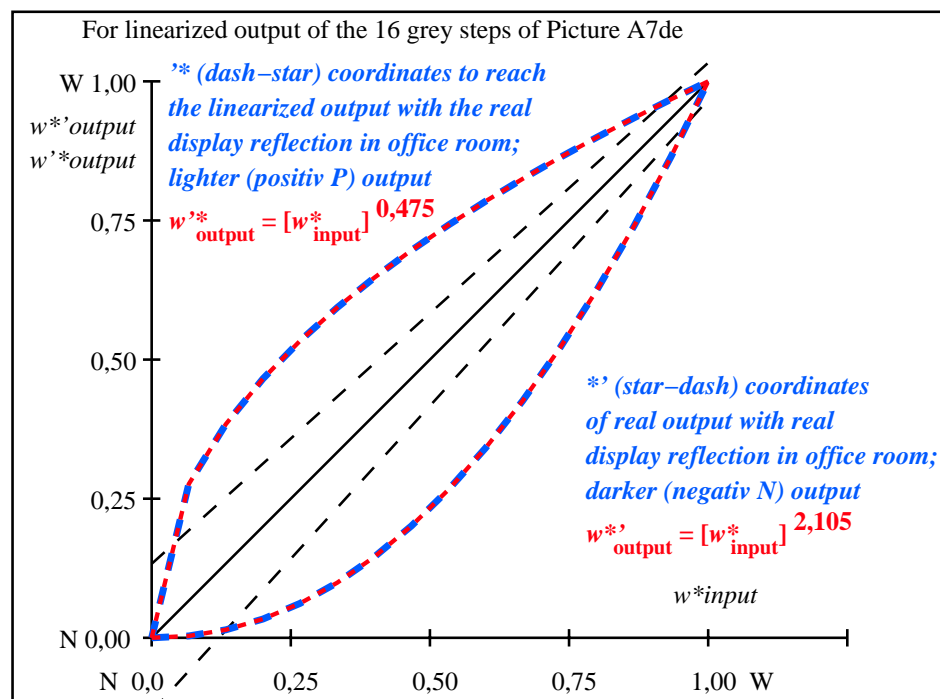

part 2; Measure: unknown; Device: unknown; Date: unknown

AE271-3de: 110562

L^*/Y_{intended} (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
0 0 0 n*																
setcmyk																
gN=2.11																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,003	0,014	0,034	0,062	0,099	0,145	0,201	0,266	0,341	0,426	0,52	0,625	0,74	0,864	1,0

AE270-7N, Picture A7*de: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

In-out: Test chart AE27 according to test chart 2 of ISO/IEC 15775
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N -range 30 to <60

input: $rgb/cmy0/000n/w$ set...
output: $->rgb_{\text{de}}$ setrgbcolor

TUB Registration: 20191001-AE27/AE27L0FA.TXT /.PS
application for measurement or viewing of the output on display and print
TUB material: code=rh4ta