


The visual 16 step spacing depends on hardware, software, and environment, for example on screen reflections of ambient light

computer display,
for example LCD

and/or external display,
for example VGA

prepare 8 gamma values
2,40 2,22, ..., 1,32, 1,14
for computer display output
in computer operating system

prepare 8 gamma values
1,75, 2,00, ..., 3,25, 3,50
for external display output
in computer operating system




Use the achromatic file which produces one page:
http://standards.iso.org/iso/9241/306/ed-2/AE06/AE06F0PX_CY8_1.PDF
or use a chromatic file with an image:
http://standards.iso.org/iso/9241/306/ed-2/AE17/AE17F0PX_CY8_1.PDF

computer
display


and/or external
display

Use start gamma value 2,4
or next gamma value
2,22, 2,04, ..., 1,32, 1,14

Use start gamma value 1,75
or next gamma value
2,00, 2,25, ..., 3,25, 3,50

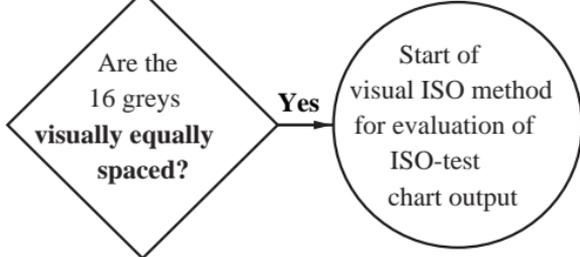

Start of
visual ISO method
for evaluation of
ISO-test
chart output



Stop: test failure

Try method with 8 increasing gamma values:
2,40 2,58, 2,76, 2,94, 3,12, 3,30, ...
instead of 8 decreasing gamma values 2,40 2,22, ...