




www.ps.bam.de/De16/10L/L16e00NP.PS /.PDF; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)



See for similar files: <http://www.ps.bam.de/De16/>; www.ps.bam.de/De16/; www.ps.bam.de/33872E Version 2.1, io=1,1



BAM registration: 20080301-De16/10L/L16e00NP.PS /.PDF
application for output of monitor, data projector, or printer systems

BAM material: code=rh4ta

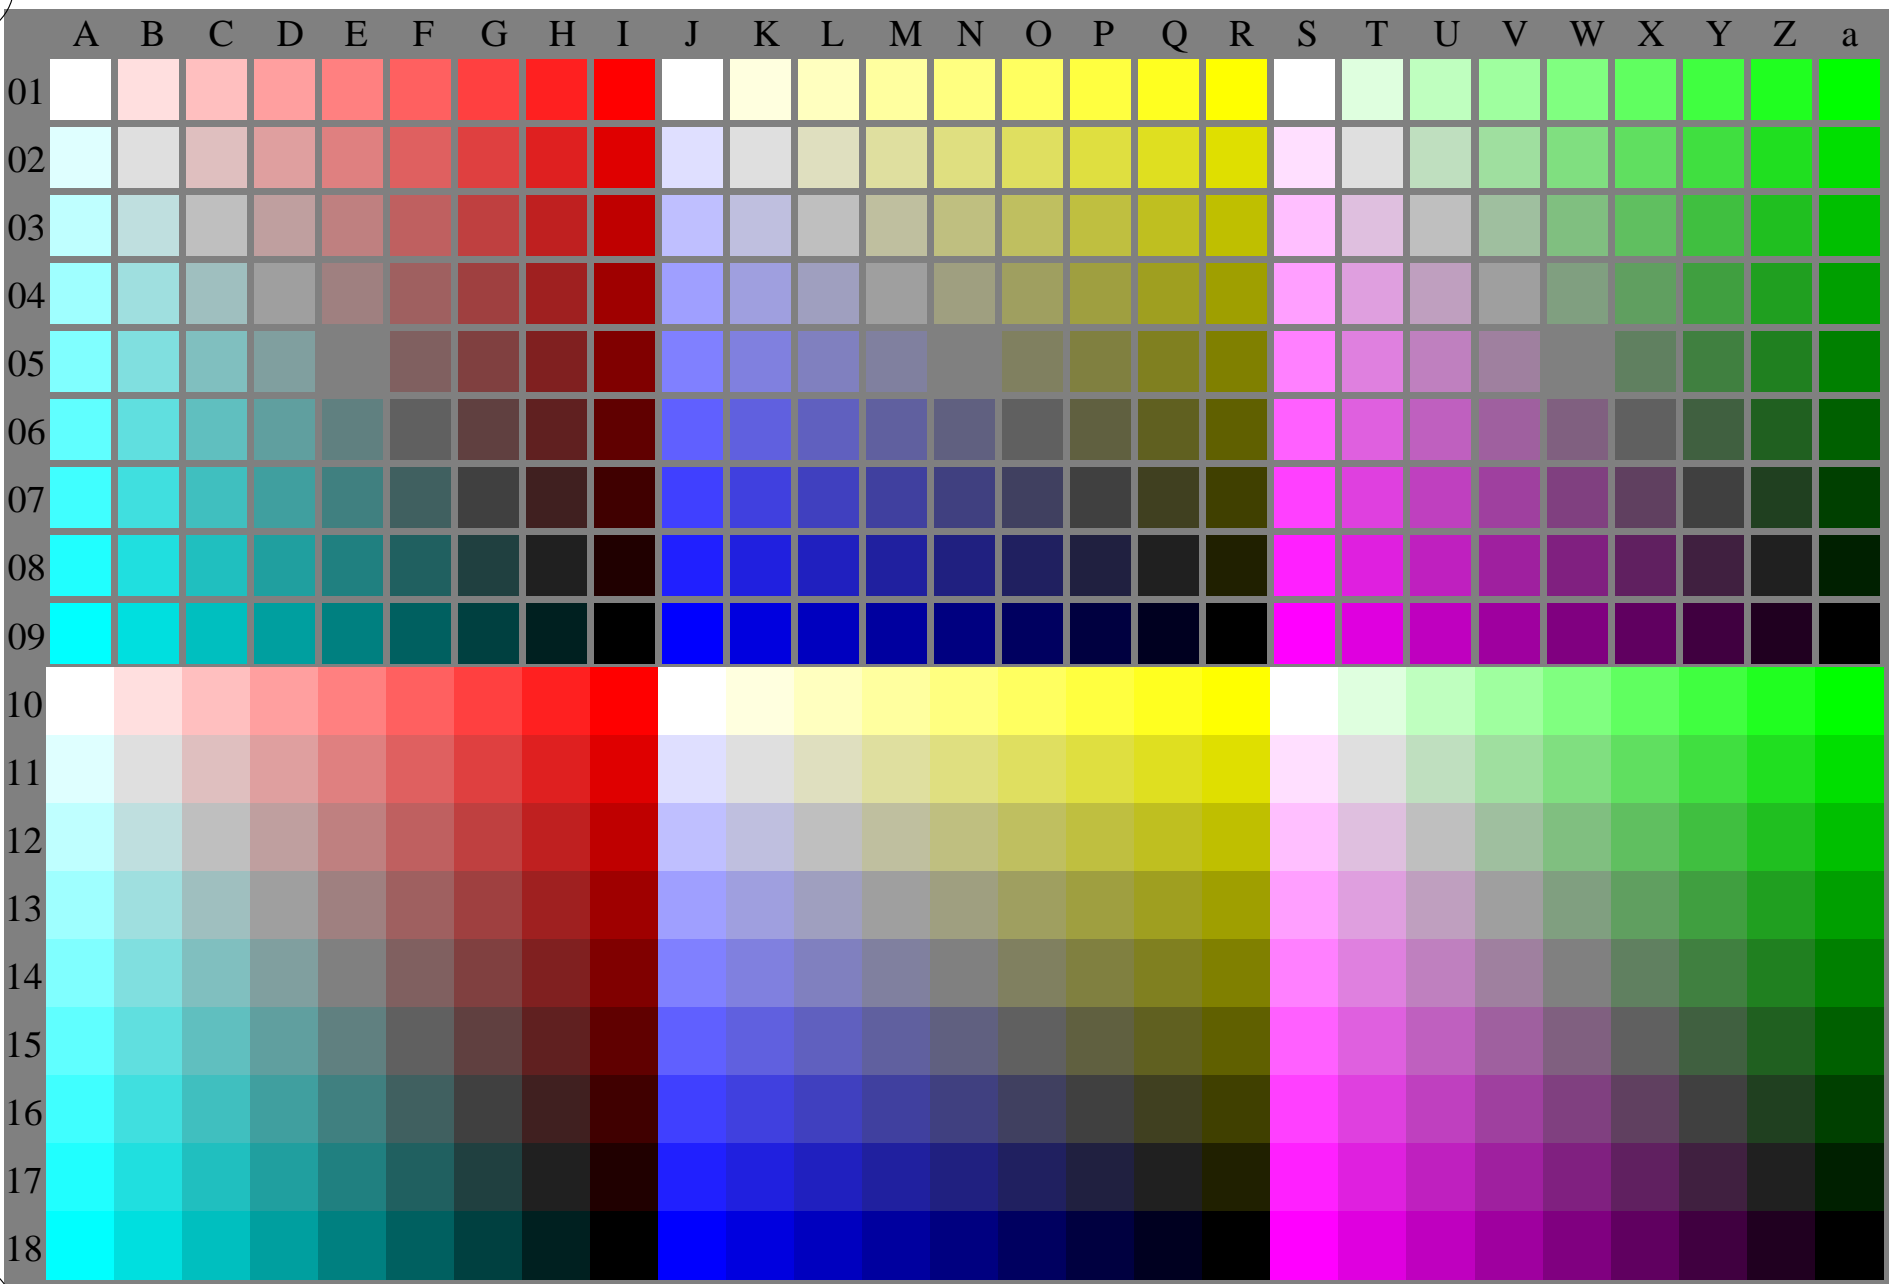


De160-7N, Test chart with 27x18=486 separate and adjacent colours; 9 step scales; compare ISO/IEC 15775:1999; rgb colour data, patch sizes: 8mm x 8mm and 9mm x 9mm, Page 1/2

Test chart 1 according to DIN 33872-6, Page 1/2
Equivalent and regular colour spacing of O-C, Y-V, L-M
input: rgb (->olv*) setrgbcolor
output: no change compared to input



Equivalent spacing for separate and adjacent colours (Yes/No decision)

Layout example: hue plane O-C, Y-V oder L-M mit 9 grey steps

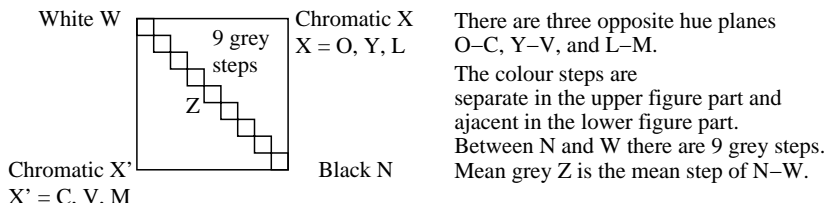

All the stepings of the three hue planes O-L, Y-V and L-M should be equivalent for separate and adjacent colours.

Is the spacing equivalent for separate and adjacent colours? underline: Yes/No

Remark: The spacing is not equivalent if there is at least one Yes in one of the following cases; for example see Annex (X):

- Is there a continuous colour change for adjacent colours and not for separate colours? underline: Yes/No
- Are there maxima and minima in the colour change for adjacent colours and not for separate colours? underline: Yes/No

Remarks:.....

Part 1 De160-3

Documentation of file format, hardware and software for this test:

- PDF-File:** either www.ps.bam.de/De16/10L/L16e00NP.PDF underline: Yes/No or www.ps.bam.de/De16/10P/P16e00NP.PDF underline: Yes/No
- PS-File:** either www.ps.bam.de/De16/10L/L16e00NA.PS underline: Yes/No or www.ps.bam.de/De16/10P/P16e00NA.PS underline: Yes/No

Used computer operating system: either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline: monitor/data projector/printer
Device model, driver and version:.....

Device output with PDF/PS-file: underline: PDF/PS-file

For device output with PDF-file (L/P)16e00NP.PDF:
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader-/Acrobat and version:.....
or with software e. g. Ghostscript and version:.....


For device output with PS-file (L/P)16e00NA.PS:
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks, e. g. output of Landscape (L) file L16e00NA.PS was cutted, Portrait (P) file P16e00NA.PS was used:.....

Part 3 De160-5

Regular colour spacing between colours Z-X' and Z-X (Yes/No decision)

Layout example: hue plane O-C, Y-V oder L-M mit 9 colour steps

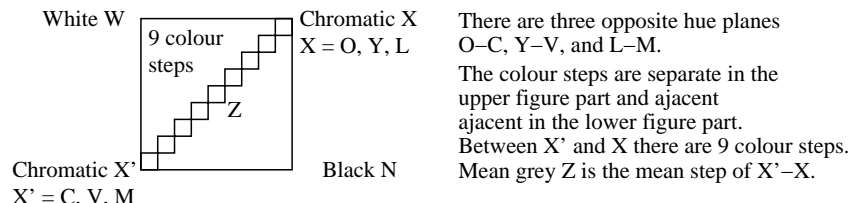

All colour steps of the three hue planes O-L, Y-V and L-M should be regular for separate and adjacent colours without large chromatic jumps at mean grey Z

Is the colour spacing regular at mean grey Z? underline: Yes/No

Remark: The colour spacing is not regular if there is at least one Yes in one of the following cases; for example see Annex (X):

- Are there colour jumps at the mean grey colour Z towards X or X' for adjacent colours? underline: Yes/No
- Are there colour jumps at the mean grey colour Z towards X or X' for separate colours? underline: Yes/No

Remarks: A colour jump has at least twice the colour change compared to the mean change.

Part 2 De161-3

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline: Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline: Yes/unknown
or with test charts using colour points according to Ishihara underline: Yes/unknown
or tested with, please specify: underline: Yes/unknown

Only for display (monitor, data projector) output:
Office workplace illumination is daylight (clouded/north sky) underline: Yes/No
PDF-file output with www.ps.bam.de/De13/10L/L13e00NP.PDF underline: Yes/No
Comparison of contrast range of 16 steps F to 0 with test chart no. 3 of DIN 33866-1:2000 give contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

Remark: In daylighted offices the contrast range is in many cases:
on paper between: >F:0 (highly glossy), F:0 (silk glossy) and E:0 (matte)
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output
PDF-File: either www.ps.bam.de/De11/10L/L11e00NP.PDF underline: Yes/No or www.ps.bam.de/De11/10P/P11e00NP.PDF underline: Yes/No
PS-File: either www.ps.bam.de/De11/10L/L11e00NA.PS underline: Yes/No or www.ps.bam.de/De11/10P/P11e00NA.PS underline: Yes/No

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline: Yes/No
If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T
Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline: Yes/No
If No, please describe other method:

Part 4 De161-5

See for similar files: <http://www.ps.bam.de/De16/>; www.ps.bam.de/De16/; www.ps.bam.de/33872E Version 2.1, io=1,1

BAM registration: 20080301-De16/10L/L16e01NP.PS /.PDF
application for output of monitor, data projector, or printer systems
BAM material: code=rh4ta