

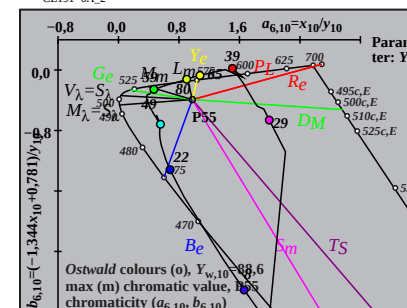
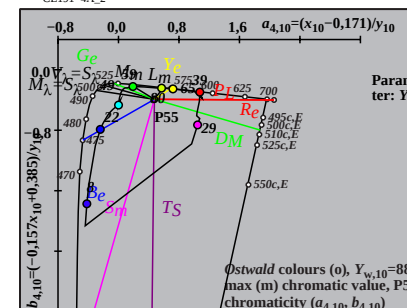
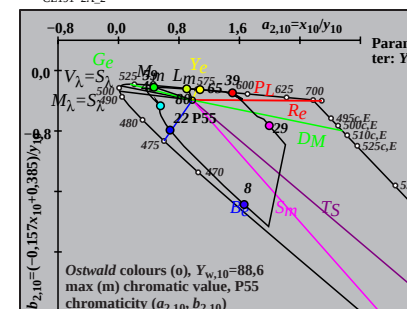
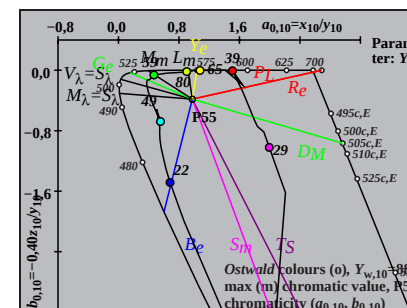
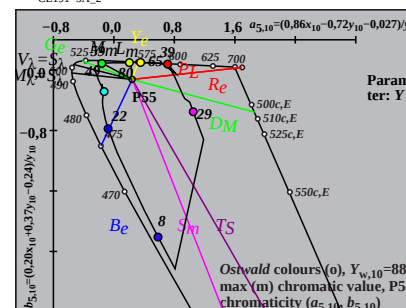
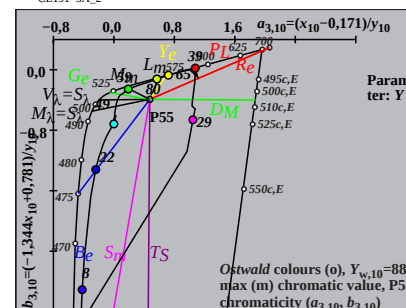
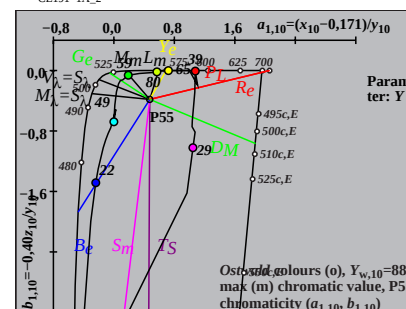


Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P55, $Y_{w,10}=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code	
0	405	31	558	27.51	49.47	83.91	0.171	0.3074	0.5215	191.7	15 477 37 587	Cm
7	435	32	560	22.8	49.85	57.05	0.1758	0.3843	0.4398	164.6	16 484 -1 484c	
10	450	32	561	19.7	50.14	35.42	0.1871	0.4763	0.3365	137.1	18 493 -1 493c	
12	460	32	564	18.98	51.05	22.54	0.205	0.5514	0.2434	121.2	21 505 -1 505c	
12	465	33	566	20.64	52.91	22.54	0.2147	0.5506	0.2346	119.4	21 507 -1 507c	
14	470	34	571	22.22	54.7	12.73	0.2478	0.6101	0.142	107.5	24 523 -1 523c	
15	475	35	579	27.66	59.09	9.31	0.2879	0.615	0.0969	99.3	26 533 -1 533c	Gm
16	480	39	599	44.05	69.36	6.75	0.3665	0.5771	0.0562	81.9	29 548 -1 548c	
16	485	-1	484c	72.47	82.68	6.75	0.4475	0.5106	0.0417	55.9	32 562 10 454	
17	490	-1	489c	72.36	81.46	4.87	0.4559	0.5133	0.0307	54.4	32 563 11 456	max
19	495	-1	495c	72.3	78.4	2.49	0.4719	0.5117	0.0162	50.8	33 565 12 461	
20	500	-1	500c	72.26	76.48	1.76	0.4801	0.5081	0.0117	48.6	33 566 12 463	
22	510	-1	510c	71.95	71.78	0.86	0.4976	0.4964	0.0059	43.3	33 568 13 467	
24	520	-1	520c	71.02	65.89	0.38	0.5172	0.4799	0.0028	36.9	34 571 14 470	Ym
25	530	-1	529c	70.23	62.6	0.24	0.5277	0.4704	0.0018	33.5	34 573 14 471	
27	540	-1	539c	67.86	55.45	0.07	0.5499	0.4494	0.0006	26.5	35 577 14 474	
28	545	-1	544c	66.25	51.69	0.03	0.5615	0.4381	0.0002	23.0	35 579 15 475	
29	550	-1	549c	64.36	47.87	0.01	0.5733	0.4265	0.0001	19.5	36 581 15 475	
31	555	-1	555c	59.6	40.19	0.0	0.5972	0.4027	0.0	13.1	37 586 15 477	
32	560	6	430	60.46	36.81	17.91	0.5249	0.3195	0.1555	353.6	45 629 16 482	
31	558	0	405	70.13	50.52	11.63	0.5301	0.3818	0.0879	11.7	37 587 15 477	Rm
32	560	7	435	74.85	50.14	38.49	0.4578	0.3067	0.2354	344.6	-1 484c 16 484	
32	561	10	450	77.95	49.85	60.12	0.4147	0.2652	0.3199	317.1	-1 493c 18 493	
32	564	12	460	78.66	48.94	73.0	0.3921	0.2439	0.3639	301.3	-1 505c 21 505	
33	566	12	465	77.01	47.08	73.0	0.3907	0.2388	0.3703	299.4	-1 507c 21 507	
34	571	14	470	75.43	45.29	82.81	0.3705	0.2225	0.4068	287.6	-1 523c 24 523	
35	579	15	475	69.99	40.9	86.23	0.355	0.2075	0.4374	279.3	-1 533c 26 533	Mm
39	599	16	480	53.6	30.63	88.79	0.3097	0.177	0.5131	261.9	-1 548c 29 548	
-1	484c	16	485	25.18	17.31	88.79	0.1918	0.1318	0.6763	235.9	10 454 32 562	
-1	489c	17	490	25.29	18.53	90.67	0.188	0.1377	0.6741	234.5	11 456 32 563	min
-1	495c	19	495	25.34	21.59	93.05	0.181	0.1542	0.6646	230.8	12 461 33 565	
-1	500c	20	500	25.38	23.51	93.78	0.1779	0.1647	0.6573	228.6	12 463 33 566	
-1	510c	22	510	25.7	28.21	94.69	0.1729	0.1898	0.6371	223.3	13 467 33 568	
-1	520c	24	520	26.63	34.1	95.16	0.1708	0.2187	0.6104	217.0	14 470 34 571	Bm
-1	529c	25	530	27.42	37.39	95.31	0.1712	0.2335	0.5951	213.6	14 471 34 573	
-1	539c	27	540	29.79	44.54	95.47	0.1754	0.2623	0.5622	206.5	14 474 35 577	
-1	544c	28	545	31.39	48.3	95.51	0.1791	0.2756	0.5451	203.0	15 475 35 579	
-1	549c	29	550	33.29	52.12	95.54	0.1839	0.288	0.5279	199.5	15 475 36 581	
-1	555c	31	555	38.04	59.8	95.55	0.1967	0.3092	0.494	193.1	15 477 37 586	
6	430	32	560	37.19	63.18	77.63	0.2089	0.3549	0.4361	173.6	16 482 45 629	
380	770	86.51	88.59	84.65	0.333	0.341	0.3258	0.0				

TUB-test chart CE19; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P55; diagram for illuminant P55, $Y_{w,10}=88,6$


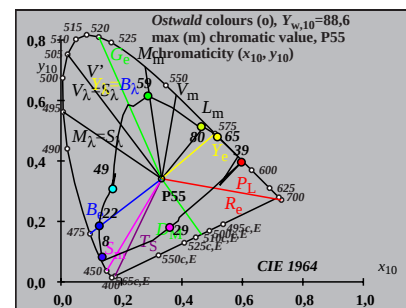


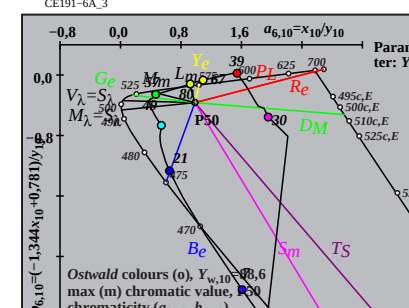

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P45, $Y_{w,10}=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	32 561	25.81	48.78	65.99	0.1835	0.3469	0.4694	185.0	16 480	38 590	Cm
7 435	32 562	22.55	49.1	46.78	0.1904	0.4145	0.3949	163.2	17 486	-1 486c	
10 450	32 564	20.14	49.35	29.8	0.2028	0.497	0.3001	139.8	18 494	-1 494c	
11 460	33 566	20.47	50.49	24.36	0.2147	0.5296	0.2556	131.4	19 499	-1 499c	
13 465	33 568	20.28	51.01	14.87	0.2353	0.5919	0.1726	118.9	22 513	-1 513c	
13 470	34 571	22.71	53.52	14.87	0.2492	0.5874	0.1632	116.6	23 516	-1 516c	
15 475	35 577	26.28	56.19	8.25	0.2896	0.6193	0.0909	105.7	26 532	-1 532c	Gm
15 480	37 589	36.95	64.3	8.25	0.3374	0.5871	0.0753	96.2	28 542	-1 542c	
17 485	51 659	75.75	82.04	4.41	0.467	0.5057	0.0272	53.6	32 564	10 454	
18 490	-1 490c	77.35	81.43	3.19	0.4775	0.5027	0.0197	50.4	33 566	12 460	max
19 495	-1 495c	77.34	79.96	2.3	0.4845	0.5009	0.0144	48.4	33 566	12 462	
20 500	-1 500c	77.3	78.23	1.64	0.4918	0.4976	0.0104	46.0	33 567	12 464	
22 510	-1 510c	77.02	73.9	0.81	0.5075	0.487	0.0054	40.4	34 570	13 468	
23 520	-1 519c	76.67	71.28	0.56	0.5162	0.4799	0.0037	37.2	34 571	14 470	Ym
25 530	-1 529c	75.38	65.24	0.23	0.5351	0.4631	0.0016	30.0	34 574	14 473	
27 540	-1 539c	73.09	58.32	0.07	0.5558	0.4435	0.0005	22.6	35 578	15 475	
29 545	-1 545c	69.63	50.85	0.01	0.5779	0.4219	0.0	15.3	36 582	15 477	
29 550	-1 549c	69.63	50.85	0.01	0.5779	0.4219	0.0	15.3	36 582	15 477	
30 555	-1 554c	67.42	47.0	0.0	0.5891	0.4107	0.0	11.9	36 584	15 478	
32 560	-1 560c	61.92	39.25	0.0	0.612	0.3879	0.0	5.7	38 590	16 480	
32 561	1 405	73.99	51.21	9.81	0.5479	0.3793	0.0726	5.0	38 590	16 480	Rm
32 562	7 435	77.24	50.89	29.02	0.4914	0.3238	0.1846	343.2	-1 486c	17 486	
32 564	10 450	79.65	50.64	46.0	0.4518	0.2872	0.2609	319.9	-1 494c	18 494	
33 566	11 460	79.33	49.5	51.44	0.44	0.2746	0.2853	311.4	-1 499c	19 499	
33 568	13 465	79.51	48.98	60.92	0.4197	0.2585	0.3216	298.9	-1 513c	22 513	
34 571	13 470	77.09	46.47	60.92	0.4178	0.2519	0.3302	296.7	-1 516c	23 516	
35 577	15 475	73.52	43.8	67.55	0.3976	0.2369	0.3653	285.8	-1 532c	26 532	Mm
37 589	15 480	62.84	35.69	67.55	0.3783	0.2149	0.4067	276.3	-1 542c	28 542	
51 659	17 485	24.04	17.95	71.39	0.212	0.1583	0.6295	233.7	10 454	32 564	
-1 490c	18 490	22.44	18.56	72.6	0.1975	0.1633	0.639	230.4	12 460	33 566	min
-1 495c	19 495	22.46	20.03	73.5	0.1936	0.1727	0.6336	228.4	12 462	33 566	
-1 500c	20 500	22.49	21.76	74.16	0.1899	0.1838	0.6262	226.1	12 464	33 567	
-1 510c	22 510	22.78	26.09	74.98	0.1839	0.2106	0.6054	220.5	13 468	34 570	
-1 519c	23 520	23.12	28.71	75.24	0.1819	0.2259	0.592	217.2	14 470	34 571	Bm
-1 529c	25 530	24.41	34.75	75.57	0.1811	0.2579	0.5608	210.1	14 473	34 574	
-1 539c	27 540	26.71	41.67	75.73	0.1853	0.2891	0.5254	202.6	15 475	35 578	
-1 545c	29 545	30.16	49.14	75.79	0.1944	0.3168	0.4886	195.3	15 477	36 582	
-1 549c	29 550	30.16	49.14	75.79	0.1944	0.3168	0.4886	195.3	15 477	36 582	
-1 554c	30 555	32.37	52.99	75.8	0.2008	0.3287	0.4703	191.9	15 478	36 584	
-1 560c	32 560	37.87	60.74	75.8	0.2171	0.3482	0.4346	185.7	16 480	38 590	
380	770	88.41	88.59	67.15	0.3621	0.3628	0.275	0.0			









TUB-test chart CE19; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P45; diagram for illuminant P45, $Y_{w,10}=88,6$

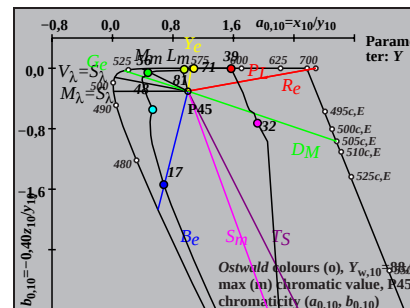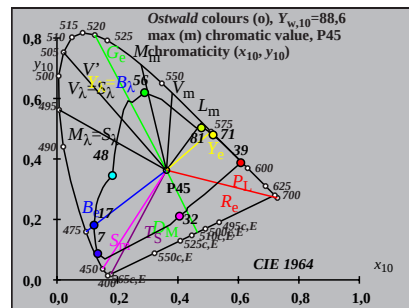

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P40, $Y_{w,10}=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
0 405	32 563	25.22	48.29	56.71	0.1937	0.3708	0.4354	181.4	16 481	38 591	Cm
7 435	32 564	22.5	48.56	40.64	0.2014	0.4347	0.3638	161.8	17 487	-1 487c	
10 450	33 565	20.53	48.79	26.34	0.2146	0.5099	0.2753	141.2	19 495	-1 495c	
12 460	33 567	20.14	49.38	17.32	0.2319	0.5686	0.1994	127.9	21 505	-1 505c	
12 465	33 568	21.3	50.64	17.32	0.2386	0.5673	0.194	126.8	21 506	-1 506c	
14 470	34 571	22.34	51.74	10.14	0.2652	0.6142	0.1204	116.0	24 521	-1 521c	
15 475	35 576	25.73	54.48	7.56	0.2931	0.6206	0.0861	109.9	26 531	-1 531c	Gm
16 480	37 585	33.82	60.22	5.58	0.3394	0.6044	0.056	100.5	28 542	-1 542c	
17 485	42 611	57.84	73.36	4.1	0.4274	0.5421	0.0303	74.7	31 558	-1 558c	
17 490	-1 489c	80.89	83.41	4.1	0.4803	0.4952	0.0243	50.6	33 566	11 458	max
19 495	-1 495c	80.84	80.92	2.17	0.4931	0.4935	0.0132	46.7	33 568	12 463	
20 500	-1 500c	80.81	79.31	1.56	0.4998	0.4905	0.0096	44.3	33 569	13 465	
22 510	-1 510c	80.54	75.25	0.78	0.5143	0.4805	0.005	38.4	34 571	13 469	
23 520	-1 519c	80.22	72.76	0.54	0.5225	0.4739	0.0035	35.0	34 572	14 471	Ym
25 530	-1 529c	78.98	66.96	0.22	0.5403	0.4581	0.0015	27.5	35 575	14 474	
28 540	-1 540c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36 581	15 477	
28 545	-1 544c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36 581	15 477	
30 550	-1 550c	71.13	49.03	0.0	0.5919	0.408	0.0	8.7	37 585	15 479	
31 555	-1 555c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37 587	16 480	
31 560	-1 559c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37 587	16 480	
32 563	0 405	76.52	51.7	7.73	0.5628	0.3803	0.0568	1.4	38 591	16 481	Rm
32 564	7 435	79.24	51.43	23.8	0.5129	0.3329	0.154	341.9	-1 487c	17 487	
33 565	10 450	81.21	51.2	38.09	0.4762	0.3003	0.2234	321.3	-1 495c	19 495	
33 567	12 460	81.6	50.61	47.12	0.455	0.2822	0.2627	307.9	-1 505c	21 505	
33 568	12 465	80.44	49.35	47.12	0.4547	0.2789	0.2663	306.8	-1 506c	21 506	
34 571	14 470	79.4	48.25	54.29	0.4363	0.2651	0.2984	296.1	-1 521c	24 521	
35 576	15 475	76.01	45.51	56.88	0.426	0.255	0.3188	290.0	-1 531c	26 531	Mm
37 585	16 480	67.92	39.77	58.85	0.4078	0.2387	0.3533	280.6	-1 542c	28 542	
42 611	17 485	43.9	26.63	60.34	0.3354	0.2034	0.461	254.8	-1 558c	31 558	
-1 489c	17 490	20.85	16.58	60.34	0.2132	0.1696	0.6171	230.6	11 458	33 566	min
-1 495c	19 495	20.9	19.07	62.27	0.2044	0.1865	0.609	226.7	12 463	33 568	
-1 500c	20 500	20.93	20.68	62.88	0.2003	0.1979	0.6017	224.3	13 465	33 569	
-1 510c	22 510	21.2	24.74	63.66	0.1934	0.2257	0.5807	218.4	13 469	34 571	
-1 519c	23 520	21.53	27.23	63.9	0.191	0.2417	0.5671	215.0	14 471	34 572	Bm
-1 529c	25 530	22.76	33.03	64.21	0.1897	0.2752	0.535	207.5	14 474	35 575	
-1 540c	28 540	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15 477	36 581	
-1 544c	28 545	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15 477	36 581	
-1 550c	30 550	30.61	50.96	64.44	0.2096	0.349	0.4413	188.7	15 479	37 585	
-1 555c	31 555	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16 480	37 587	
-1 559c	31 560	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16 480	37 587	
380	770	90.14	88.59	57.09	0.3822	0.3756	0.2421	0.0			









TUB-test chart CE19; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P40; diagram for illuminant P40, $Y_{w,10}=88,6$

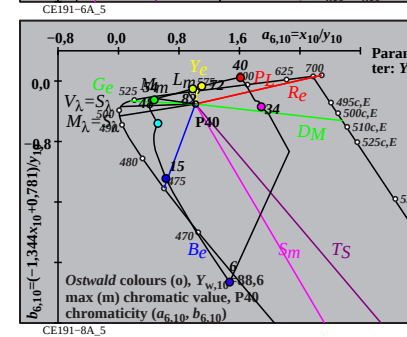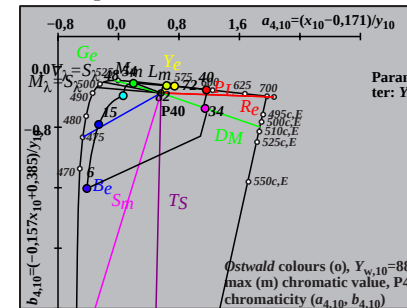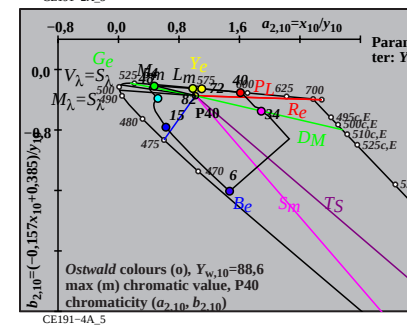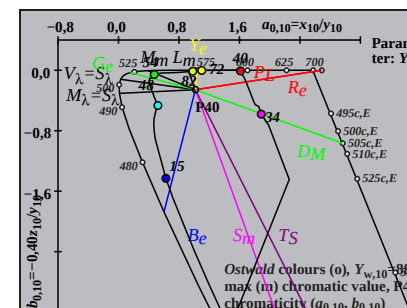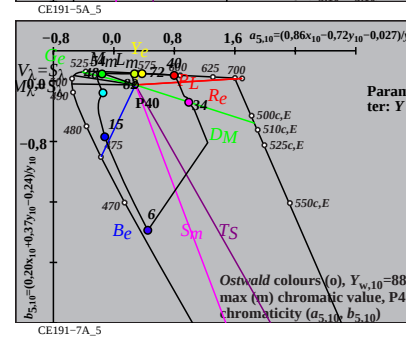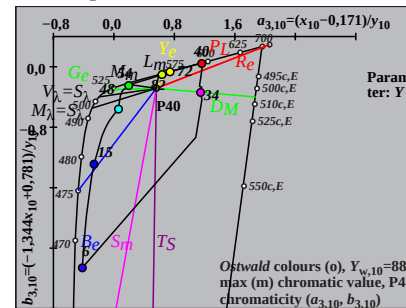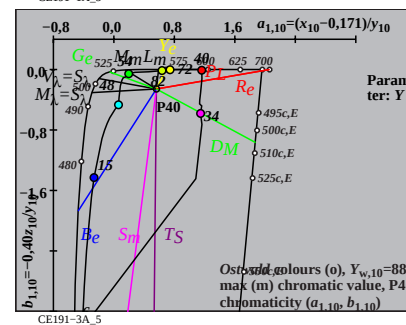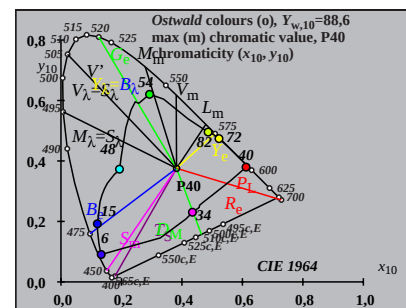

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P35, $Y_{w,10}=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code	
1	405	33	566	24.58	47.6	45.57	0.2087	0.4042	0.387	175.7	16 484 38 594	Cm
7	435	33	566	22.69	47.85	33.77	0.2175	0.4586	0.3237	159.9	17 488 58 694	
10	450	33	567	21.16	48.03	22.38	0.231	0.5245	0.2444	142.5	19 496 -1 496c	
12	460	33	568	20.84	48.52	14.97	0.2471	0.5753	0.1775	130.7	21 505 -1 505c	
12	465	34	570	21.81	49.55	14.97	0.2526	0.5739	0.1734	129.9	21 506 -1 506c	
14	470	34	572	22.69	50.39	8.93	0.2766	0.6144	0.1089	120.1	24 521 -1 521c	
14	475	35	576	25.65	53.14	8.93	0.2924	0.6057	0.1018	118.0	24 524 -1 524c	Gm
16	480	36	583	31.45	56.92	5.01	0.3368	0.6094	0.0537	107.8	28 540 -1 540c	
17	485	39	598	46.34	65.95	3.71	0.3994	0.5684	0.032	92.5	30 552 -1 552c	
17	490	-1	489c	85.42	84.24	3.71	0.4926	0.4858	0.0214	48.6	33 568 11 459	max
18	495	-1	494c	85.39	83.23	2.73	0.4982	0.4857	0.0159	46.7	33 569 12 461	
19	500	-1	499c	85.37	82.02	2.0	0.5039	0.4841	0.0118	44.5	34 570 12 464	
22	510	-1	510c	85.1	76.84	0.74	0.523	0.4723	0.0045	35.7	34 572 14 470	
24	520	-1	520c	84.31	71.92	0.34	0.5384	0.4593	0.0022	28.1	35 575 14 473	Ym
26	530	-1	530c	82.68	65.94	0.13	0.5558	0.4432	0.0008	20.0	35 578 15 476	
27	540	-1	539c	81.47	62.59	0.07	0.5652	0.4342	0.0005	15.9	36 580 15 478	
28	545	-1	544c	79.96	59.06	0.03	0.575	0.4246	0.0002	11.9	36 581 15 479	
30	550	-1	550c	75.95	51.59	0.0	0.5954	0.4044	0.0	4.6	37 586 16 481	
31	555	-1	555c	73.38	47.71	0.0	0.6059	0.394	0.0	1.3	37 588 16 482	
32	560	-1	560c	70.4	43.78	0.0	0.6165	0.3834	0.0	358.3	38 591 16 483	
33	566	1	405	80.13	52.39	6.58	0.576	0.3766	0.0473	355.7	38 594 16 484	Rm
33	566	7	435	82.02	52.14	18.38	0.5376	0.3418	0.1205	339.9	58 694 17 488	
33	567	10	450	83.55	51.96	29.77	0.5054	0.3143	0.1801	322.5	-1 496c 19 496	
33	568	12	460	83.87	51.47	37.18	0.4861	0.2983	0.2155	310.8	-1 505c 21 505	
34	570	12	465	82.9	50.44	37.18	0.4861	0.2958	0.218	310.0	-1 506c 21 506	
34	572	14	470	82.02	49.6	43.22	0.4691	0.2836	0.2472	300.2	-1 521c 24 521	
35	576	14	475	79.05	46.85	43.22	0.4674	0.277	0.2555	298.0	-1 524c 24 524	Mm
36	583	16	480	73.25	43.07	47.14	0.4481	0.2634	0.2883	287.8	-1 540c 28 540	
39	598	17	485	58.36	34.04	48.44	0.4143	0.2417	0.3439	272.6	-1 552c 30 552	
-1	489c	17	490	19.29	15.75	48.44	0.231	0.1887	0.5802	228.6	11 459 33 568	min
-1	494c	18	495	19.32	16.76	49.42	0.2259	0.196	0.5779	226.7	12 461 33 569	
-1	499c	19	500	19.33	17.97	50.15	0.221	0.2055	0.5734	224.5	12 464 34 570	
-1	510c	22	510	19.61	23.15	51.41	0.2082	0.2458	0.5459	215.7	14 470 34 572	
-1	520c	24	520	20.39	28.07	51.81	0.2033	0.2799	0.5166	208.1	14 473 35 575	Bm
-1	530c	26	530	22.02	34.05	52.02	0.2037	0.315	0.4812	200.0	15 476 35 578	
-1	539c	27	540	23.23	37.4	52.08	0.2061	0.3318	0.462	195.9	15 478 36 580	
-1	544c	28	545	24.74	40.93	52.12	0.21	0.3474	0.4424	191.9	15 479 36 581	
-1	550c	30	550	28.75	48.4	52.15	0.2223	0.3742	0.4033	184.6	16 481 37 586	
-1	555c	31	555	31.32	52.28	52.16	0.2307	0.385	0.3841	181.3	16 482 37 588	
-1	560c	32	560	34.3	56.21	52.16	0.2404	0.3939	0.3655	178.3	16 483 38 591	
380	770	92.76	88.58	46.2	0.4076	0.3892	0.203	0.0				









TUB-test chart CE19; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P35; diagram for illuminant P35, $Y_{w,10}=88,6$

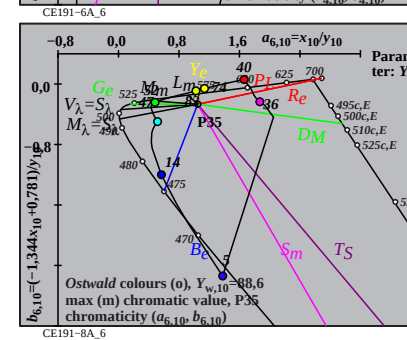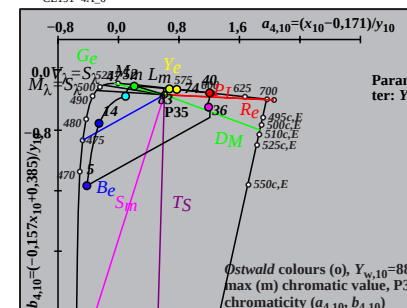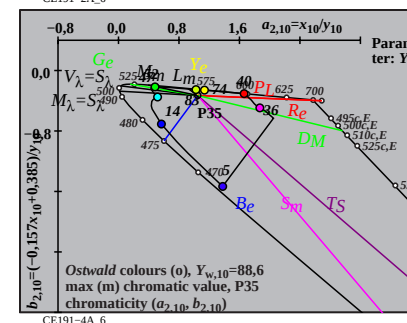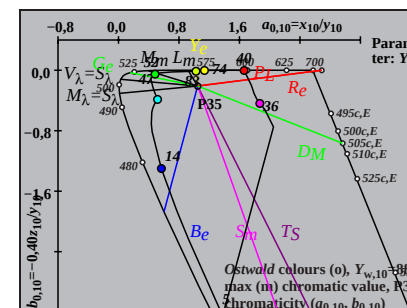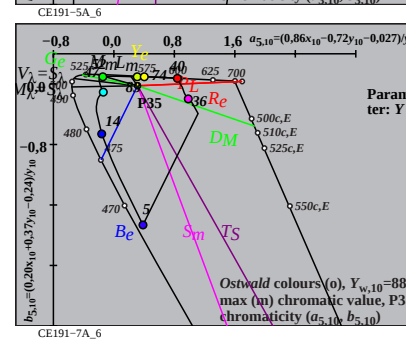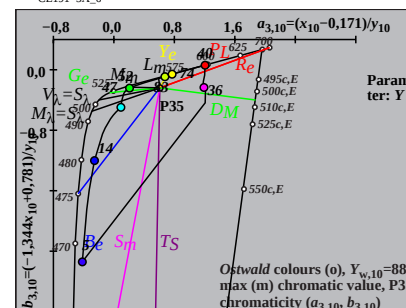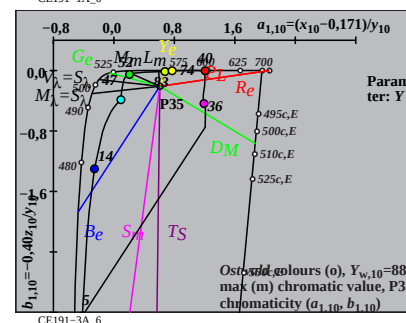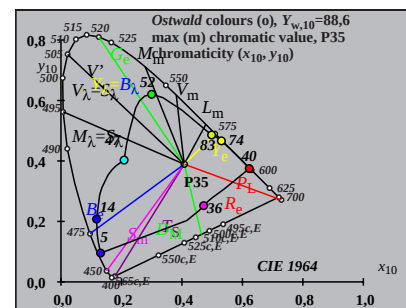

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P25, $Y_{w,10}=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	34 573	24.85	45.26	22.95	0.267	0.4863	0.2466	160.7	18 490	39 599	Cm
6 435	34 573	24.45	45.45	19.65	0.273	0.5075	0.2194	155.2	18 492	42 613	
9 450	34 573	23.88	45.62	14.82	0.2832	0.541	0.1757	146.7	19 497	-1 497c	
12 460	34 574	23.43	45.78	9.11	0.2991	0.5844	0.1163	136.3	21 506	-1 506c	
12 465	35 575	23.99	46.3	9.11	0.3021	0.5831	0.1147	136.1	21 507	-1 507c	
13 470	35 576	24.73	46.96	7.33	0.3129	0.5942	0.0928	132.5	22 513	-1 513c	
15 475	35 577	25.96	47.73	4.47	0.3321	0.6105	0.0572	126.7	25 527	-1 527c	Gm
16 480	36 580	28.79	49.71	3.44	0.3513	0.6066	0.042	123.4	27 536	-1 536c	
17 485	37 586	34.08	53.19	2.62	0.3791	0.5916	0.0292	119.3	28 544	-1 544c	
18 490	39 597	46.89	60.81	1.98	0.4274	0.5543	0.0181	110.3	31 555	-1 555c	max
19 495	58 690	99.34	84.52	1.49	0.5359	0.4559	0.008	38.2	35 575	13 466	
20 500	-1 500c	99.75	83.67	1.11	0.5405	0.4534	0.006	34.4	35 575	13 469	
21 510	-1 509c	99.69	82.44	0.82	0.5448	0.4506	0.0044	30.7	35 576	14 471	
24 520	-1 520c	98.95	77.12	0.29	0.561	0.4372	0.0016	17.3	35 579	15 477	Ym
26 530	-1 530c	97.6	72.18	0.11	0.5744	0.4248	0.0006	7.7	36 581	16 481	
27 540	-1 539c	96.56	69.3	0.06	0.5819	0.4176	0.0003	3.1	36 583	16 482	
28 545	-1 544c	95.22	66.17	0.03	0.5898	0.4099	0.0001	358.8	37 585	16 484	
29 550	-1 549c	93.56	62.83	0.01	0.5982	0.4017	0.0	354.9	37 586	17 485	
31 555	-1 555c	89.05	55.56	0.0	0.6157	0.3842	0.0	348.3	38 591	17 487	
31 560	-1 559c	89.05	55.56	0.0	0.6157	0.3842	0.0	348.3	38 591	17 487	
34 573	1 405	91.68	54.73	3.18	0.6128	0.3658	0.0212	340.8	39 599	18 490	Rm
34 573	6 435	92.09	54.54	6.48	0.6014	0.3562	0.0423	335.2	42 613	18 492	
34 573	9 450	92.66	54.37	11.31	0.5851	0.3433	0.0714	326.8	-1 497c	19 497	
34 574	12 460	93.1	54.21	17.02	0.5665	0.3298	0.1035	316.4	-1 506c	21 506	
35 575	12 465	92.55	53.69	17.02	0.5668	0.3288	0.1042	316.1	-1 507c	21 507	
35 576	13 470	91.81	53.03	18.79	0.561	0.324	0.1148	312.6	-1 513c	22 513	
35 577	15 475	90.57	52.26	21.65	0.5505	0.3177	0.1316	306.7	-1 527c	25 527	Mm
36 580	16 480	87.75	50.28	22.69	0.5459	0.3128	0.1411	303.5	-1 536c	27 536	
37 586	17 485	82.45	46.8	23.51	0.5397	0.3063	0.1539	299.4	-1 544c	28 544	
39 597	18 490	69.65	39.18	24.14	0.5237	0.2946	0.1815	290.3	-1 555c	31 555	min
58 690	19 495	17.2	15.47	24.64	0.3001	0.2699	0.4298	218.2	13 466	35 575	
-1 500c	20 500	16.78	16.32	25.02	0.2888	0.2807	0.4304	214.4	13 469	35 575	
-1 509c	21 510	16.84	17.55	25.31	0.2821	0.2939	0.4239	210.8	14 471	35 576	
-1 520c	24 520	17.58	22.87	25.84	0.2652	0.3449	0.3898	197.3	15 477	35 579	Bm
-1 530c	26 530	18.93	27.81	26.02	0.2602	0.3822	0.3575	187.7	16 481	36 581	
-1 539c	27 540	19.97	30.69	26.07	0.2603	0.3999	0.3397	183.1	16 482	36 583	
-1 544c	28 545	21.31	33.82	26.1	0.2623	0.4163	0.3213	178.8	16 484	37 585	
-1 549c	29 550	22.98	37.16	26.12	0.2663	0.4308	0.3028	174.9	17 485	37 586	
-1 555c	31 555	27.49	44.43	26.13	0.2803	0.4531	0.2665	168.3	17 487	38 591	
-1 559c	31 560	27.49	44.43	26.13	0.2803	0.4531	0.2665	168.3	17 487	38 591	
380	770	103.24	88.58	23.15	0.4802	0.412	0.1077	0.0			

TUB-test chart CE19; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P25; diagram for illuminant P25, $Y_{w,10}=88,6$

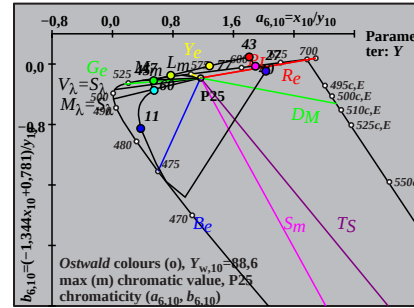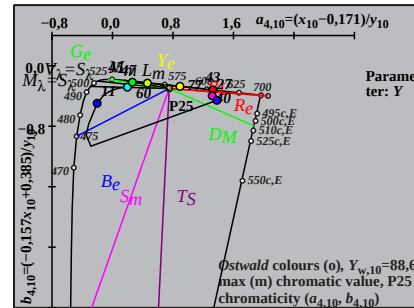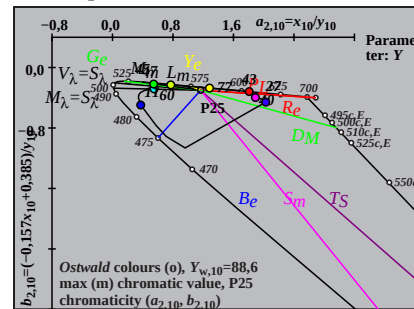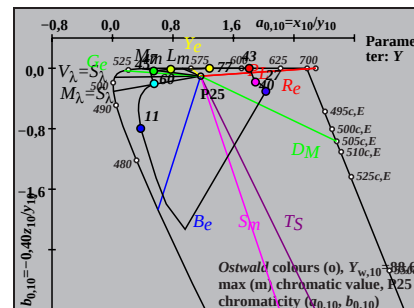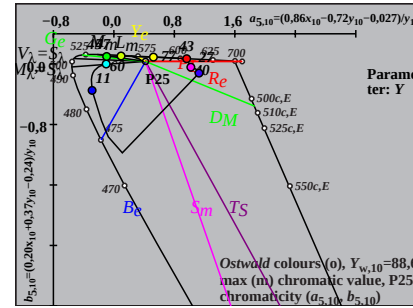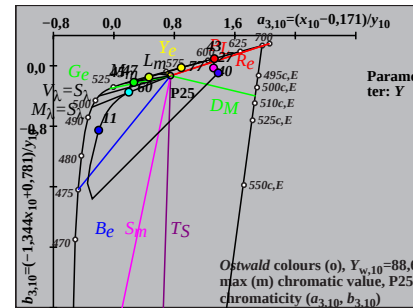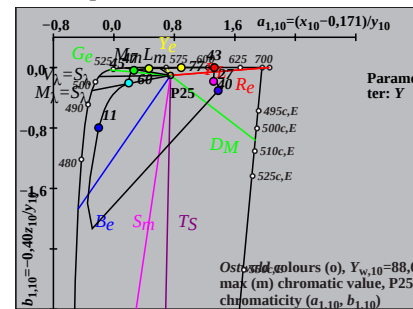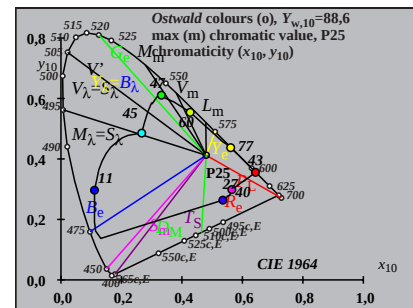

TUB registration: 20170801-CE19/CE19L0NP.PDF /.PS
application for measurement of offset print output

TUB material: code=rha4ta