


HPE\_CIEF10\_X-Zapfenempfindlichkeit  $Y_{\text{sum}}=100$

$$\bar{I}_{\text{F10\_X,n}}(\lambda) = [\mathbf{B}_{11}\bar{x}_{\text{F10\_X,s}}(\lambda) + \mathbf{B}_{12}\bar{y}_{\text{F10\_X,s}}(\lambda) + \mathbf{B}_{13}\bar{z}_{\text{F10\_X,s}}(\lambda)]/4,18$$

$$\mathbf{B}_{1j} \quad 0,2170 \quad 0,8357 \quad -0,0435 \quad (\lambda \sim 570)$$

$$\lambda_{1,m,2} = 504, 555, 617 \quad \text{D65: } \Sigma \bar{I}_{\text{F10\_X,s}}(\lambda) = 23,87$$

$$\bar{I}_{\text{F10\_X,n}}(\lambda_m) = 1$$

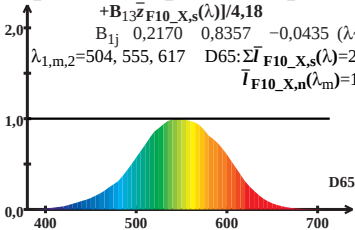

Wellenlänge  $\lambda/\text{nm}$