
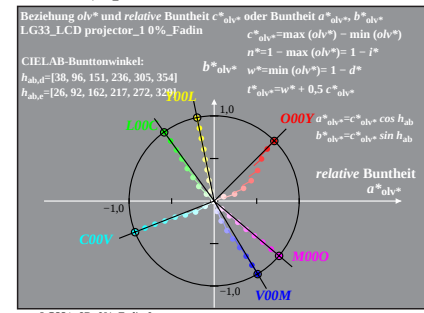
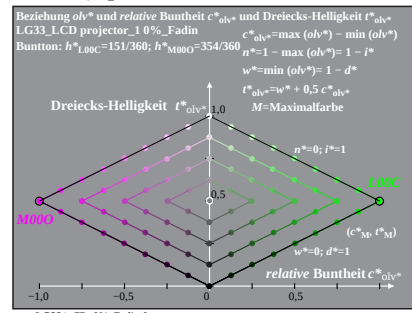
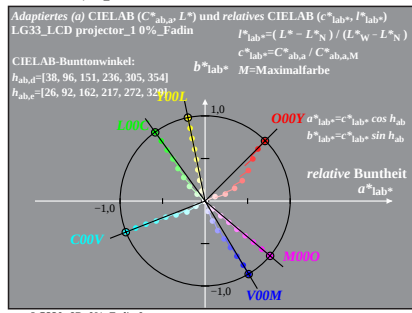
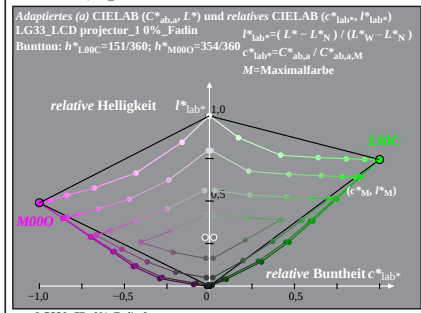
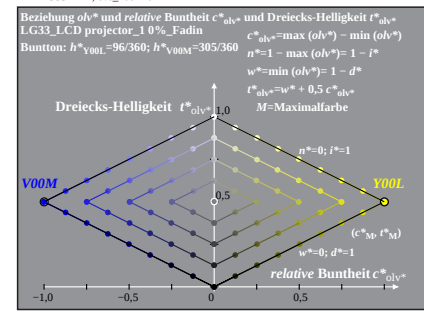
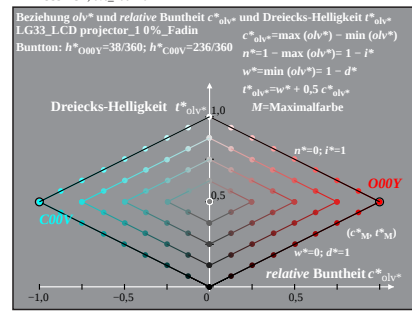
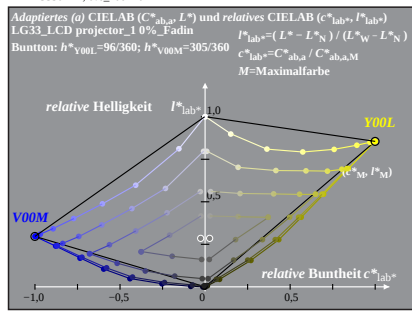
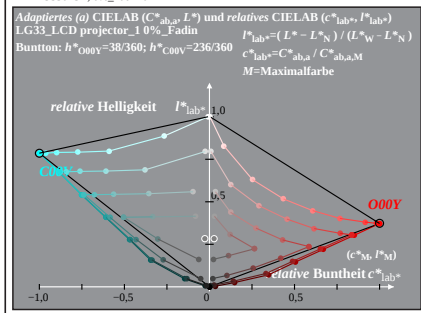
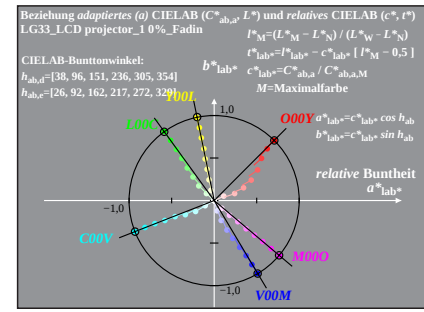
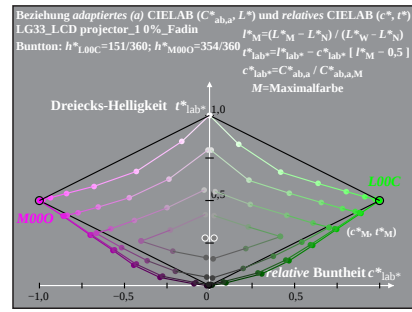
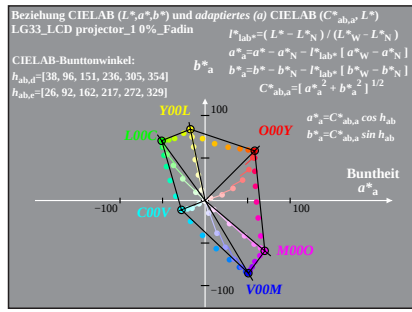
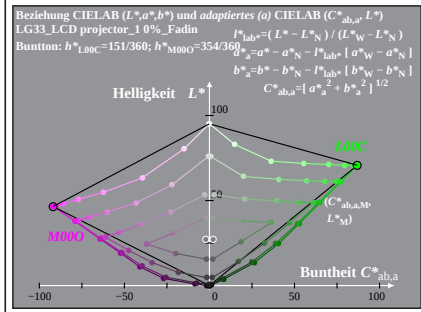
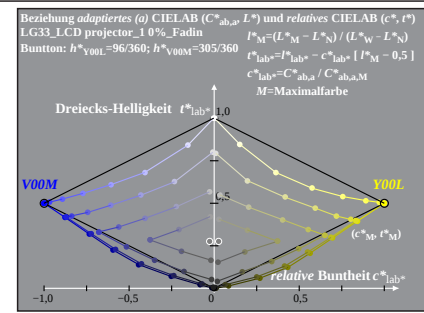
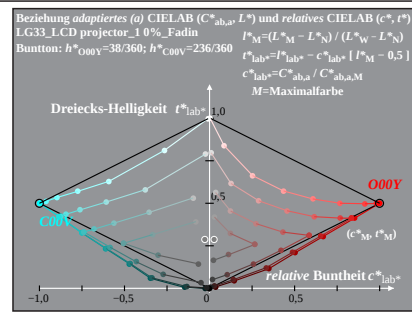
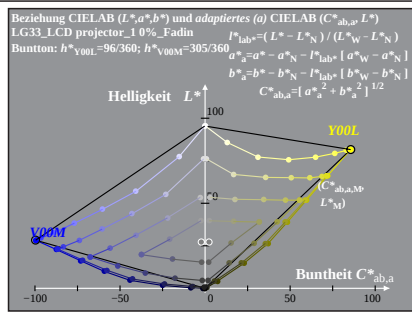


% LG330-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Bunton- und unbunte Reihen;; Leuchtdichtefaktor gemessen: Y_m und normiert: $Y_n = Y_w = 89$, Seite 1/6; Display-Typ: LCD_projector_100828_1 % LG33_LCD projector_1 0%_Fadin

088293	-01100	000993	%3	0	0646 #	008576	-00390	001251	%3	0	0727 #	000000	000000	000000	%3	0	0808 #	000049	-00057	000085	%3	0	0889 #	000049	-00105	000085	%3	0	0970 #	005075	-00032	-00256	%3	0	1051 #	008421	-00667	-00423	%3	0	0647 #	009529	-00234	000018	%3	0	0728 #	000000	000000	000000	%3	0	0890 #	000000	000000	000000	%3	0	0971 #	006260	-00080	-00145	%3	0	1052 #
% LG330-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdichtefaktor gemessen: Y_m und normiert: $Y_n = Y_w = 89$, Seite 2/6; Display-Typ: LCD_projector_100828_1																																				% LG33_LCD projector_1_0%_Fadin																													

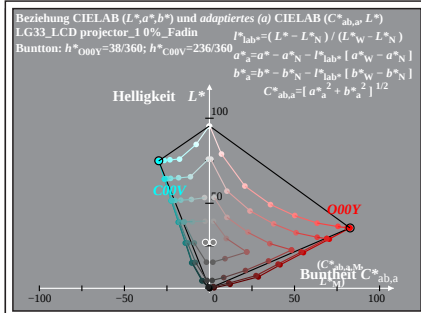

007/41	-03.043	-00684	%3	1	009/9	007/22	-02692	-00543	%3	1	0160	007/972	-02340	-00400	%3	1	0241	008222	-01987	-00255	%3	1	0322	008472	-01629	-00097	%3	1	0403	008714	-01213	000064	%3	1	0484	008916	-00950	000281	%3	1	0565	#
007513	-02782	-01063	%3	1	0080	007764	-02433	-00930	%3	1	0161	008015	-02083	-00796	%3	1	0242	008266	-01734	-00663	%3	1	0323	008452	-01385	-00529	%3	1	0404	008760	-01047	-00400	%3	1	0485	009010	-00698	-00267	%3	1	0566	#

% LG330-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichbeständige 9stufige Buntton- und unbunte Reihen; Leuchtdichtefaktor gemessen: Ym und normiert: Yw = Yw = 89, Seite 4/6; Display-Typ: LCD_projector_100828_1

% LG33_LCD projector_1_0%_Fadit

009203	-00639	000878	%3	1	0646	%	009345	-00217	001054	%3	0727	%	000444	000729	000731	%3	1	0808	%	001026	-00217	001054	%3	1	0889	%	000884	-00639	000878	%3	1	0970	%	006975	000000	000000	%3	1	1051	%	
009261	-00349	-00133	%3	1	0647	%	009512	000000	000000	%3	1	0728	%	000000	000000	000000	%3	1	0809	%	000000	000000	000000	%3	1	0890	%	000000	000000	000000	%3	1	0971	%	007610	000000	000000	%3	1	1052	%
% LG330-7 R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdefektfaktor gemessen: Yn und normiert: Yn = Yw = 89, Seite 5/6; Display-Typ: LCD projector 100828 1																																	% LG33 LCD projector 1 0% Fadit								

