
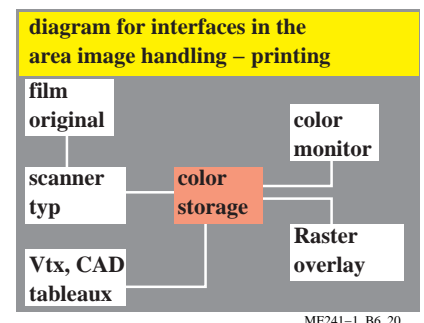
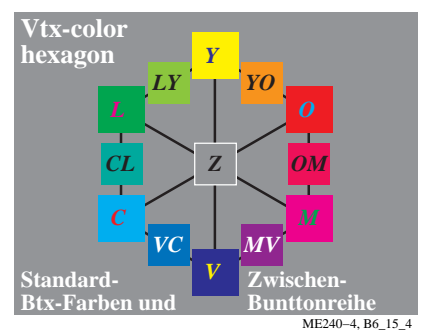
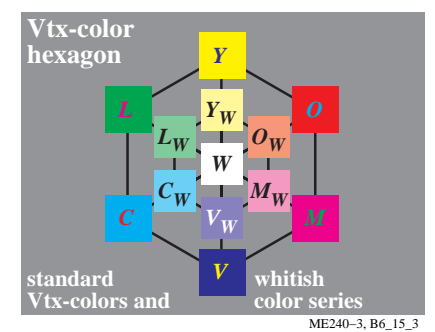
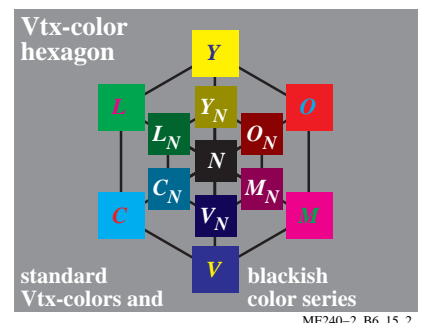







See original or copy: <http://web.me.com/klaus.richter/ME24/ME24LONP.PDF> /PS
 Technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>

TUB registration: 20101101-ME24/ME24LONP.PDF /PS
 application for measurement of printer or monitor systems


TUB material: code=rh4ta

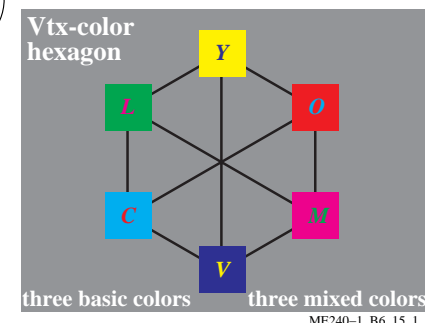

From film original to the printing-reproduction, influence parameters:
 film material: Agfa, Fuji, Kodak
 exposure: -6GRAD, 0GRAD, +6GRAD
 taking illuminant: 3200K, 5500K, 7700K
 scanner typ: wide band, laser, ...
 scanner adjustment: empty window, film base, DIN-test color no. 16 / 17
 profile transformation: quadratic
 reproduction model: raster enhancement
 printing colors: Euro scale, ...
 ME241-2, B6_21

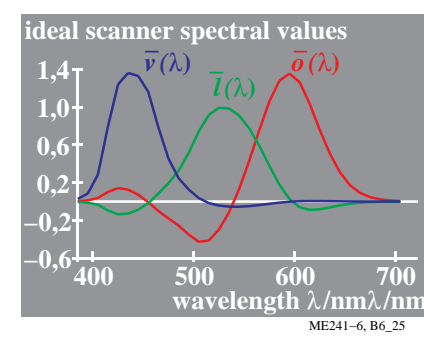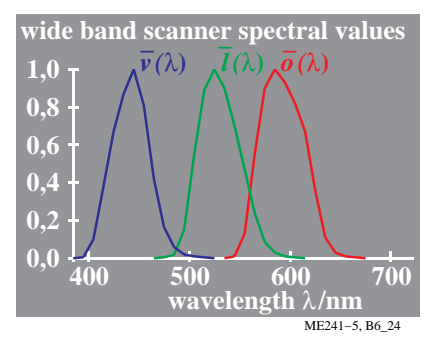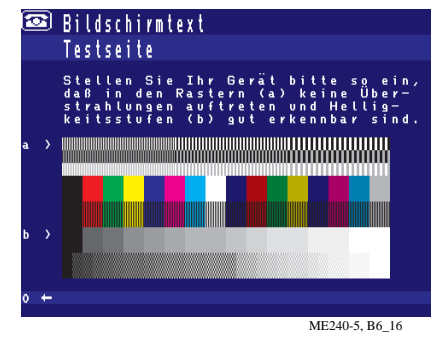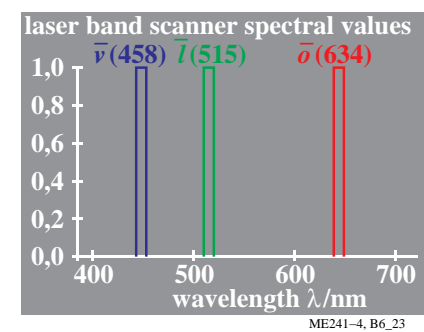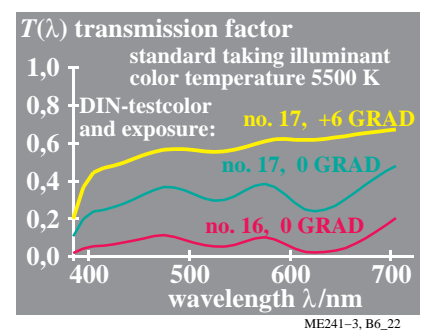

program change
 BAM-home page
 1 rem BAM-Btx-Leitseite
 2 rem Bildänderung
 3 send *65100#
 4 print at(5,3) "Koll.Farbgraphik"
 5 print at(5,14) "19.2.86, 15h, BAM"
 6 stop
 ME240-7, B6_18

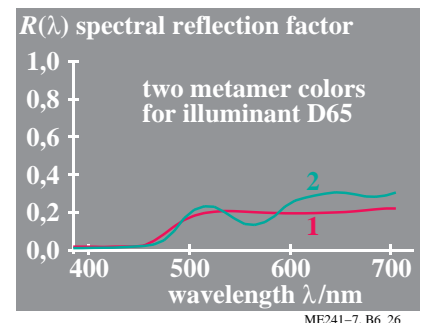

Farbwiedergabe-Index R_i der metameren BAM-Scanner-Testfarbe

Scanner	TF	Farbwiedergabe-Index	Farbabstand
Breitband	1	82	3
	2	84	
Laser	1	63	10
	2	69	
idealer	1	100	0
	2	100	

D55, Farbjustierung leeres Bildfenster
 ME241-8, B6_27