


<http://130.149.60.45/~farbmatrik/OE57/OE57L0NA.TXT> /.PS; linearized output, Page 1/3
F: Output Linearization (OL) data OE57/OE57L0NA.TXT /.PS in File (F)



OE570-7, Picture B1-130-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 *colorimage*

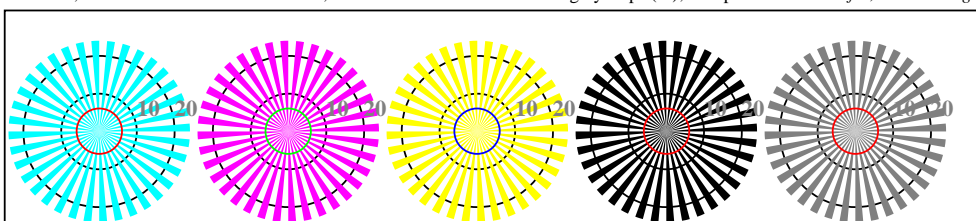

Radial grating W-C_d Radial grating W-M_d Radial grating W-Y_d Radial grating W-N Radial grating W-Z


OE570-5, Picture B2W-130-0: Radial gratings W-C_d; W-M_d; W-Y_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE570-7, Picture B3W-130-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE57: Test chart 2 according to ISO 15775, TR 24705; 1MR, DH
Image, radial gratings, 16 step colour scales, Landolt-rings

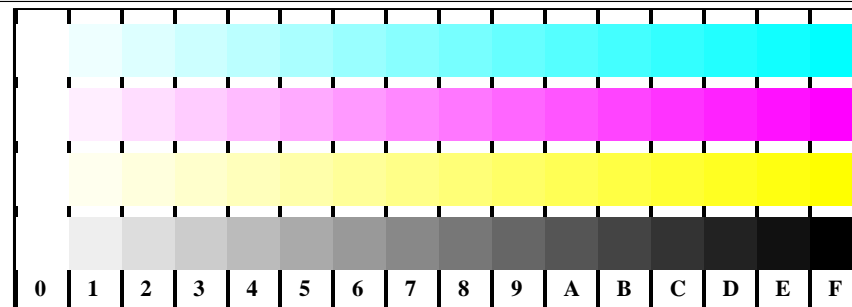


OE571-1, Picture B4W-L-130-0: 16 equidistant steps W-C_d; W-M_d; W-Y_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

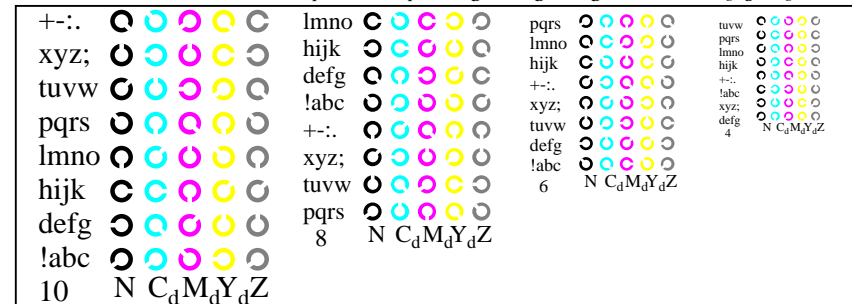


OE571-3, Picture B5W-130-0: Script and Landolt-rings N; C_d; M_d; Y_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

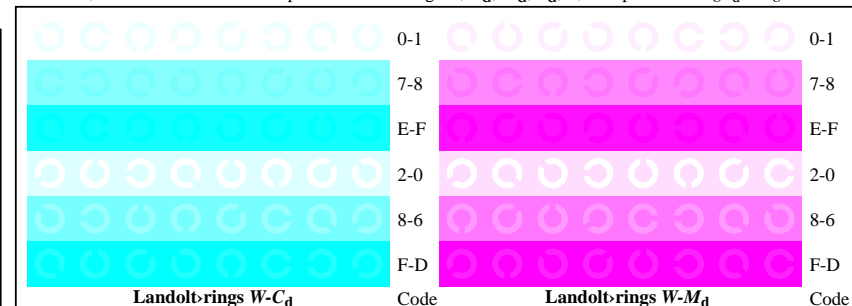

OE571-5, Picture B6W-L-130-0: Landolt-rings W-C_d; W-M_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

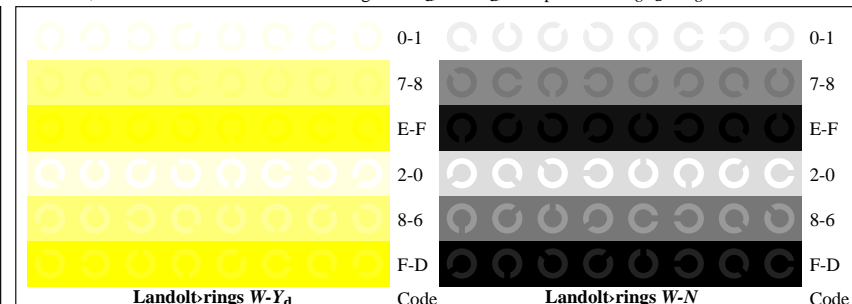

OE571-7, Picture B7W-L-130-0: Landolt-rings W-Y_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$



input: *rgb* ($\rightarrow \text{rgb}^*_d$) *setrgbcolor*
output 130-0: *g_p*=1.0; *g_N*=1.0

Test for the visual linearized output of Pictures B1W-130-0 to B7W-130-0

Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1W-130-0

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2W-130-0

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3W-130-0

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
If Yes: How many colours have clear differences? of the given 14 steps: **..... Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3W-130-0

Are the 16 steps on the upper rows distinguishable? **Yes/No**
If No: How many steps can be distinguished? of the given 16 steps: **..... Steps**

Part 1

OE570-3N-130-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE57/OE57L0NP.PDF> **underline Yes/No**

PS-File: <http://130.149.60.45/farbmetrik/OE57/OE57L0NA.PS> **or underline Yes/No**

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**

Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file OE57L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE57L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3

OE570-7N-130-1

OE57: Form A for test chart 2 according to ISO 15775; 1MR, DH
Image, radial gratings, 16 step colour scales, Landolt-rings

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to picture B4W-130-0

Colour row	Test	Are all the 16 steps distinguishable?	Yes/No
$W-C_d$ White – Cyanblue:	If No: How many steps can be distinguished? of the given 16 steps Steps	Yes/No
$W-M_d$ White – Magentared:	If No: How many steps can be distinguished? of the given 16 steps Steps	Yes/No
$W-Y_d$ White – Yellow:	If No: How many steps can be distinguished? of the given 16 steps Steps	Yes/No
$W-N$ White – Black:	If No: How many steps can be distinguished? of the given 16 steps Steps	Yes/No

Test of characters and Landolt-rings in four sizes according to picture B5W-130-0

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$, and $W-N$ according to pictures B6W-130-0, and B7W-130-0

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1	Yes/No	Yes/No	Yes/No
7 – 8	Yes/No	Yes/No	Yes/No
E – F	Yes/No	Yes/No	Yes/No
2 – 0	Yes/No	Yes/No	Yes/No
8 – 6	Yes/No	Yes/No	Yes/No
F – D	Yes/No	Yes/No	Yes/No

Part 1

OE571-3N-130-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: **underline Yes/No**
either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
or with test charts using colour points according to Ishihara **underline Yes/unknown**
or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**

PDF file: <http://130.149.60.45/farbmetrik/OE57/OE57F1P2.PDF> **underline Yes/No**

PS file: <http://130.149.60.45/farbmetrik/OE57/OE57F1P2.PS> **underline Yes/No**

Picture A7-130-2: contrast range: (>F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE57/OE57F1P2.PDF>

picture A7-130-2 **underline Yes/No**

PS-File: <http://130.149.60.45/farbmetrik/OE57/OE57F1P2.PS>

picture A7-130-2 **or underline Yes/No**

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF **underline Yes/No**

If No, please describe other method:

Part 4

OE571-7N-130-1

input: $rgb (->rgb^*_d)$ setrgbcolor
output 130-1: $g_p=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1.1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 0.0$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 100$

OE570-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

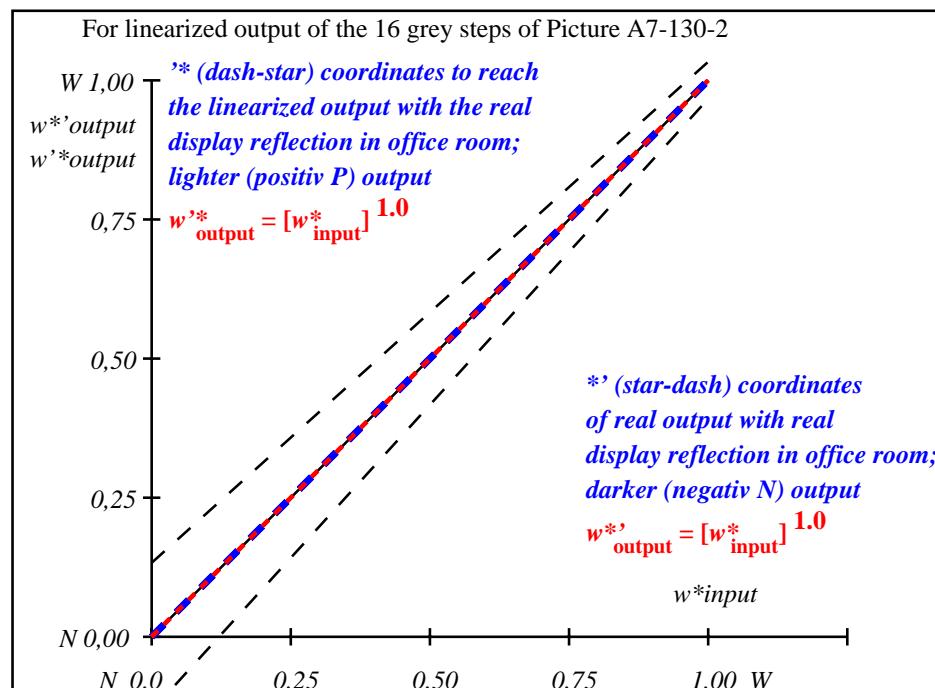

OE571-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb gp=1.0																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE570-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE57: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88.9:0.31$; Y_N range 0,0 to <0,46

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 130-2: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE57/OE57L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta