


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



OE580-7, Picture D1W-130-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 *colorimage*

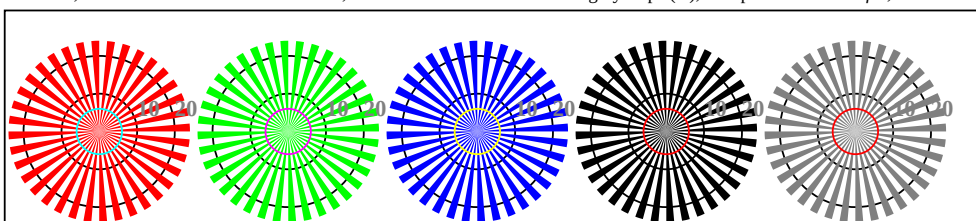

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-130-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-130-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y8} = 288:1

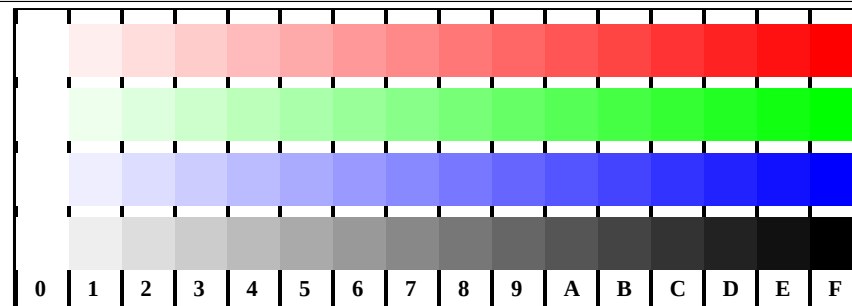


OE581-1, Picture D4W-L-130-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

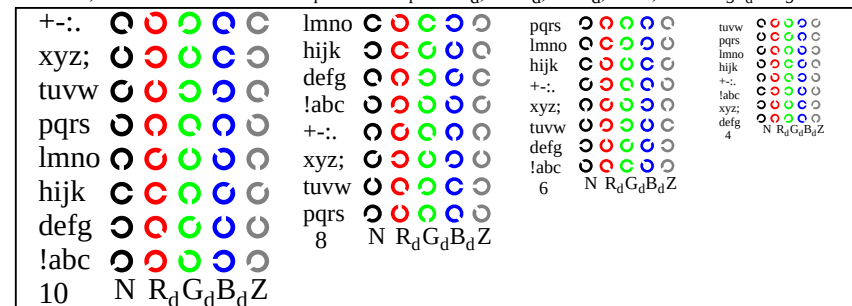

OE581-3, Picture D5W-130-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

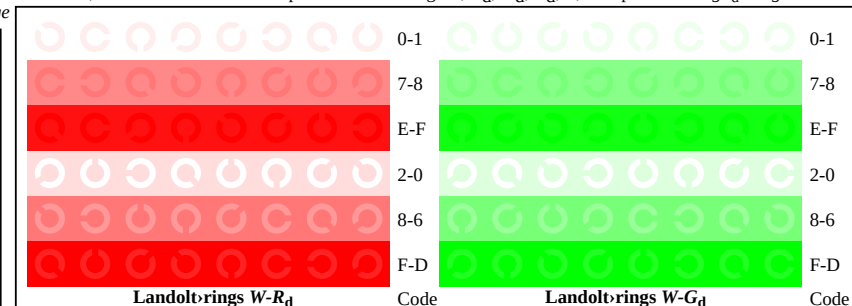

OE581-5, Picture D6W-L-130-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

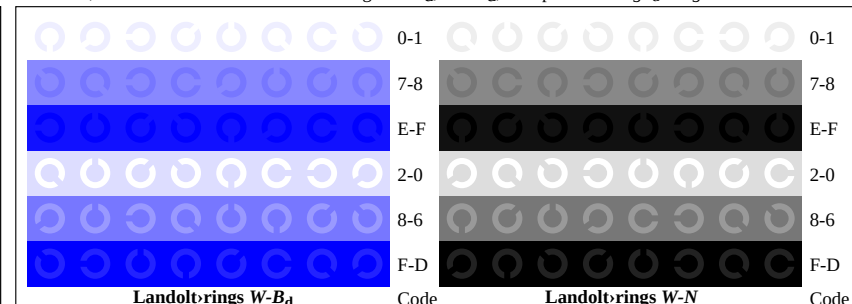

OE581-7, Picture D7W-L-130-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
output 130-0: *g_P*=1.0; *g_N*=1.0



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> /.TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)

Test for the visual linearized output of Pictures D1W-130-0 to D7W-130-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-130-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-130-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-130-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-130-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-130-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer
Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-130-1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-130-0

W-R _d White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-G _d White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-B _d White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-N White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-130-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-130-0, and D7W-130-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-130-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-130-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline range
Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

picture A7-130-2 underline Yes/No

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No
If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T
Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No
If No, please describe other method:

Part 4 OE581-7N-130-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH input: *rgb (->rgb*) setrgbcolor*
Test chart according to ISO 9241-306, Annex E, C_{Y8} = 288:1 output 130-1: *g_P=1.0; g_N=1.0*

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref			l*out			LAB*out			LAB*out/c-ref			ΔE*
1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.0	0.07	6.36	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
3	12.72	0.0	0.0	0.13	12.72	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
4	19.08	0.0	0.0	0.2	19.08	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
5	25.44	0.0	0.0	0.27	25.44	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
6	31.8	0.0	0.0	0.33	31.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
7	38.16	0.0	0.0	0.4	38.16	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
8	44.52	0.0	0.0	0.47	44.52	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
9	50.89	0.0	0.0	0.53	50.89	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
10	57.25	0.0	0.0	0.6	57.25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
11	63.61	0.0	0.0	0.67	63.61	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
12	69.97	0.0	0.0	0.73	69.97	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
13	76.33	0.0	0.0	0.8	76.33	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
14	82.69	0.0	0.0	0.87	82.69	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
15	89.05	0.0	0.0	0.93	89.05	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.0	0.25	23.85	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
19	47.71	0.0	0.0	0.5	47.71	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
20	71.56	0.0	0.0	0.75	71.56	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

OE580-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

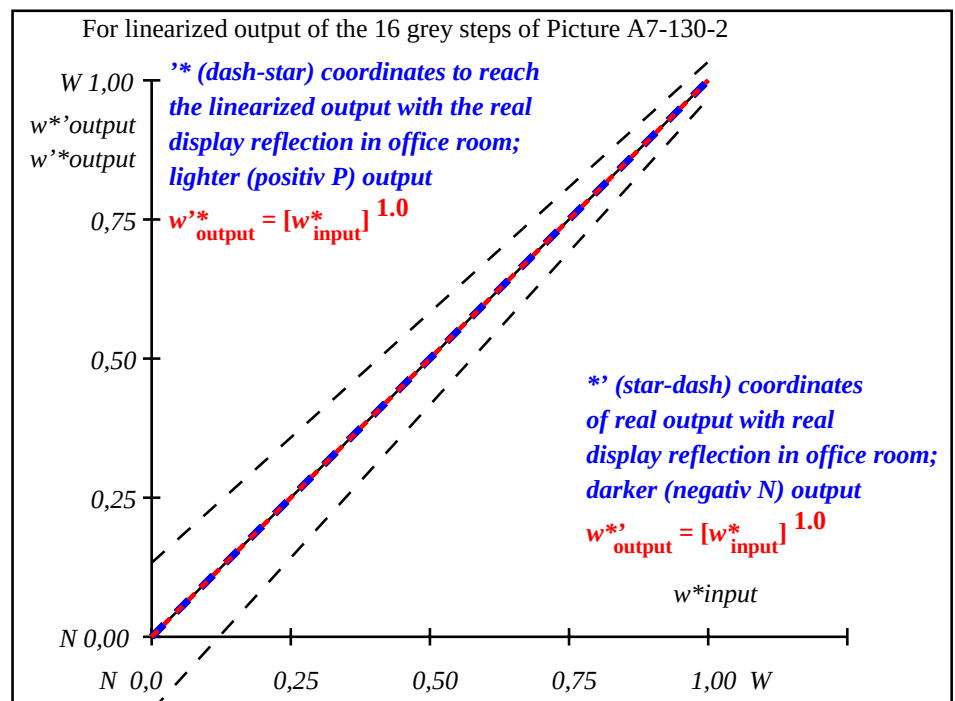

OE581-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=1.0$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE580-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y8} = 288:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 130-2: $g_P=1.0$; $g_N=1.0$


TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



OE580-7, Picture D1W-131-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 *colorimage*

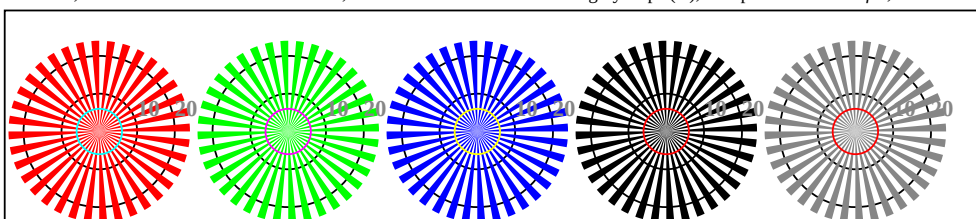

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-131-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-131-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y7} = 144:1

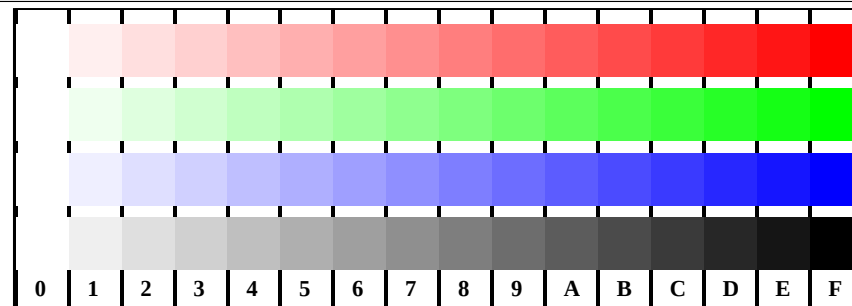


OE581-1, Picture D4W-L-131-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

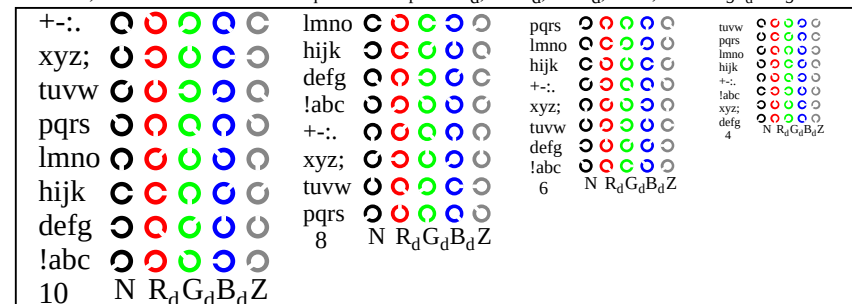

OE581-3, Picture D5W-131-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

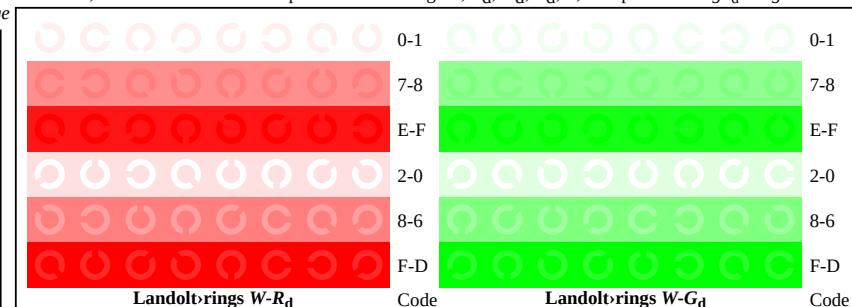

OE581-5, Picture D6W-L-131-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

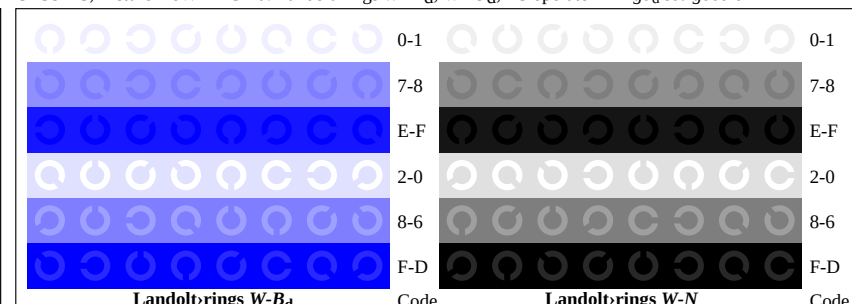

OE581-7, Picture D7W-L-131-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
output 131-0: *g_P*=0.92; *g_N*=1.0



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> /.TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)

Test for the visual linearized output of Pictures D1W-131-0 to D7W-131-0, page 1/3
Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-131-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-R_d$, $W-G_d$, $W-B_d$ according to picture D2W-131-0

	$W-R_d$	$W-G_d$	$W-B_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-131-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture D3W-131-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-131-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-131-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y7} = 144:1$

Test of 16 visually equally spaced steps of the colour rows $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to picture D4W-131-0

$W-R_d$ White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-G_d$ White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-B_d$ White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-N$ White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-131-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R_d	Ring G_d	Ring B_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to pictures D6W-131-0, and D7W-131-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-R_d$ background - ring	Colour row $W-G_d$ background - ring	Colour row $W-B_d$ background - ring	Colour row $W-N$ background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-131-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-131-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0) compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

picture A7-131-2 underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

picture A7-131-2 or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No

If No, please describe other method:

Part 4 OE581-7N-131-1

input: $rgb (->rgb^*_d)$ setrgbcolor
output 131-1: $g_p=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	5.69 0.0 0.0	0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
2	11.67 0.0 0.0	0.1	14.73 0.0 0.0	3.06 0.0 0.0	3.06
3	17.65 0.0 0.0	0.18	21.96 0.0 0.0	4.3 0.0 0.0	4.3
4	23.63 0.0 0.0	0.26	28.63 0.0 0.0	4.99 0.0 0.0	4.99
5	29.62 0.0 0.0	0.33	34.96 0.0 0.0	5.34 0.0 0.0	5.34
6	35.6 0.0 0.0	0.39	41.05 0.0 0.0	5.46 0.0 0.0	5.46
7	41.58 0.0 0.0	0.46	46.96 0.0 0.0	5.38 0.0 0.0	5.38
8	47.56 0.0 0.0	0.52	52.72 0.0 0.0	5.16 0.0 0.0	5.16
9	53.54 0.0 0.0	0.59	58.36 0.0 0.0	4.82 0.0 0.0	4.82
10	59.52 0.0 0.0	0.65	63.88 0.0 0.0	4.36 0.0 0.0	4.36
11	65.5 0.0 0.0	0.71	69.32 0.0 0.0	3.82 0.0 0.0	3.82
12	71.48 0.0 0.0	0.77	74.67 0.0 0.0	3.19 0.0 0.0	3.19
13	77.47 0.0 0.0	0.83	79.95 0.0 0.0	2.49 0.0 0.0	2.49
14	83.45 0.0 0.0	0.89	85.16 0.0 0.0	1.72 0.0 0.0	1.72
15	89.43 0.0 0.0	0.94	90.31 0.0 0.0	0.89 0.0 0.0	0.89
16	95.41 0.0 0.0	1.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01
17	5.69 0.0 0.0	0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
18	28.12 0.0 0.0	0.31	33.4 0.0 0.0	5.28 0.0 0.0	5.28
19	50.55 0.0 0.0	0.56	55.55 0.0 0.0	5.0 0.0 0.0	5.0
20	72.98 0.0 0.0	0.78	76.0 0.0 0.0	3.02 0.0 0.0	3.02
21	95.41 0.0 0.0	1.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.7$

Mean colour reproduction index: $R^*_{ab,m} = 85$

OE580-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

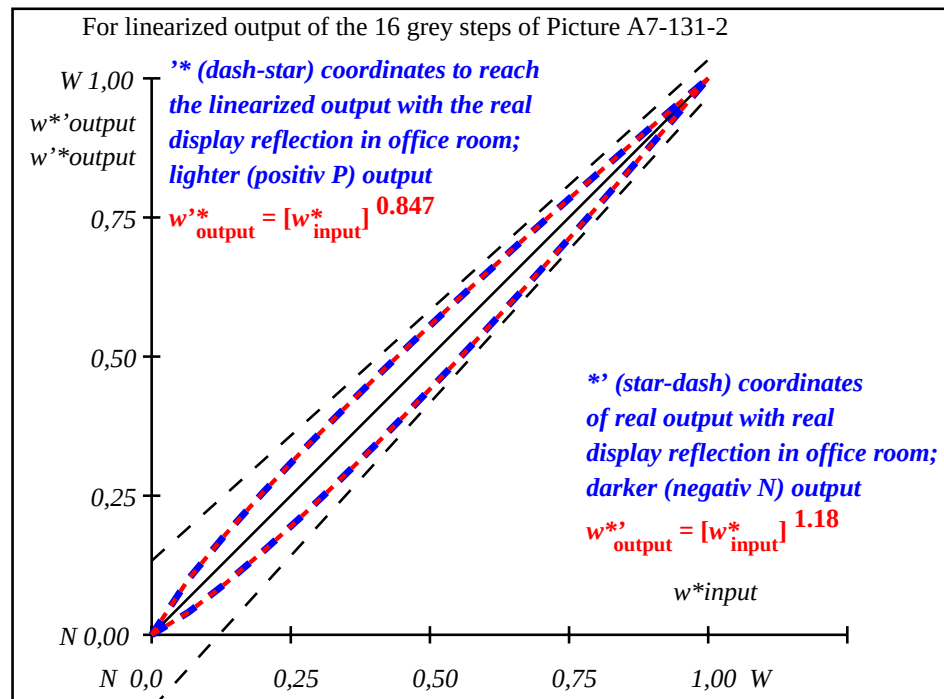

OE581-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^*w^*w^*$ setrgb $g_P=0.92$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.082	0.155	0.226	0.295	0.362	0.428	0.494	0.559	0.623	0.688	0.75	0.814	0.876	0.938	1.0

OE580-7N, Picture A7-131-2: 16 visual equidistant L^* -grey steps; PS operator: $w^*w^*w^*$ setrgbcolor


OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y7} = 144:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 131-2: $g_P=0.92$; $g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>




<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
 F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



image pixel: 192 x 128
 384 x 256
 768 x 512
 1536 x 1024
 3072 x 2048



OE580-7, Picture D1W-132-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 *colorimage*

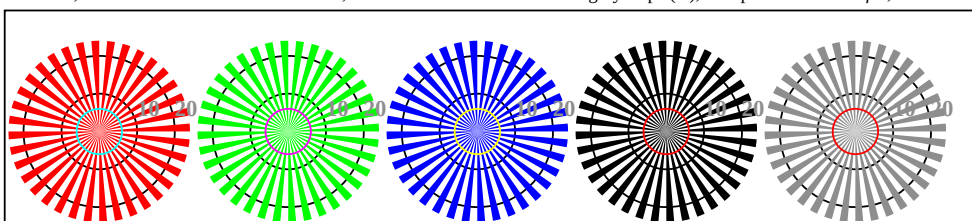

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-132-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-132-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
 Test chart according to ISO 9241-306, Annex E, C_{Y6} = 72:1

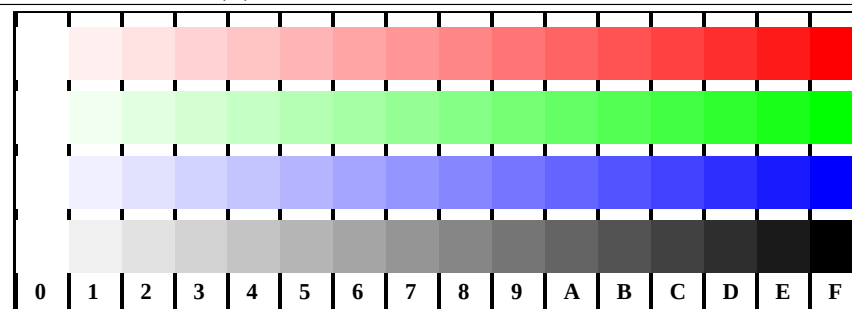


OE581-1, Picture D4W-L-132-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

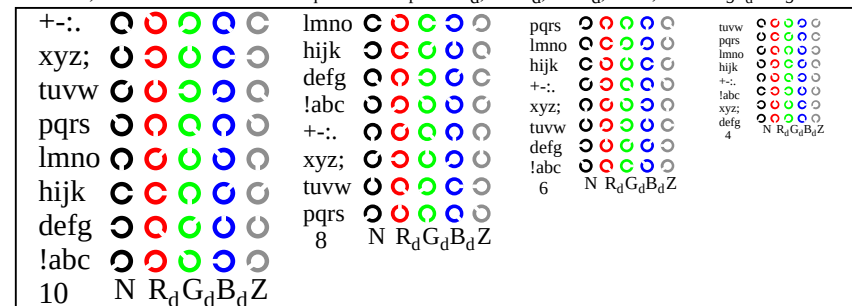

OE581-3, Picture D5W-132-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

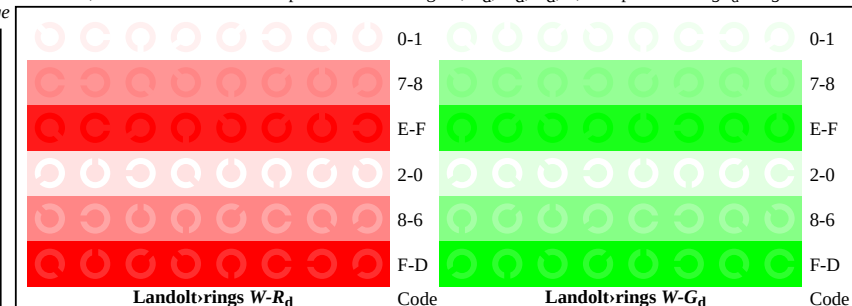


OE581-5, Picture D6W-L-132-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

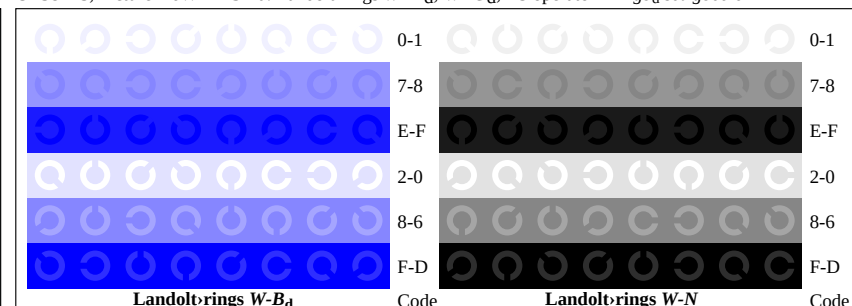


OE581-7, Picture D7W-L-132-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
 output 132-0: *g_P*=0.85; *g_N*=1.0



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
 application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> /.TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)

Test for the visual linearized output of Pictures D1W-132-0 to D7W-132-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-132-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-132-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-132-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-132-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-132-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer
Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-132-1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-132-0

W-R _d White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-G _d White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-B _d White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-N White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-132-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-132-0, and D7W-132-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-132-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-132-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline range
Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

picture A7-132-2

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No
If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T
Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No
If No, please describe other method:

Part 4 OE581-7N-132-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH input: *rgb* (->*rgb**_d) *setrgbcolor*
Test chart according to ISO 9241-306, Annex E, C_{Y6} = 72:1 output 132-1: *g_p*=0.85; *g_N*=1.0

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	10.99 0.0 0.0	10.99 0.0 0.0	10.99 0.0 0.0	0.0 0.0 0.0	0.01
2	16.62 0.0 0.0	14 22.52 0.0 0.0	22.52 0.0 0.0	5.9 0.0 0.0	5.9
3	22.25 0.0 0.0	23 30.18 0.0 0.0	30.18 0.0 0.0	7.93 0.0 0.0	7.93
4	27.88 0.0 0.0	31 36.84 0.0 0.0	36.84 0.0 0.0	8.97 0.0 0.0	8.97
5	33.5 0.0 0.0	38 42.93 0.0 0.0	42.93 0.0 0.0	9.43 0.0 0.0	9.43
6	39.13 0.0 0.0	45 48.63 0.0 0.0	48.63 0.0 0.0	9.5 0.0 0.0	9.5
7	44.76 0.0 0.0	51 54.03 0.0 0.0	54.03 0.0 0.0	9.27 0.0 0.0	9.27
8	50.39 0.0 0.0	57 59.19 0.0 0.0	59.19 0.0 0.0	8.81 0.0 0.0	8.81
9	56.02 0.0 0.0	63 64.17 0.0 0.0	64.17 0.0 0.0	8.15 0.0 0.0	8.15
10	61.64 0.0 0.0	69 68.98 0.0 0.0	68.98 0.0 0.0	7.33 0.0 0.0	7.33
11	67.27 0.0 0.0	74 73.65 0.0 0.0	73.65 0.0 0.0	6.38 0.0 0.0	6.38
12	72.9 0.0 0.0	8 78.2 0.0 0.0	78.2 0.0 0.0	5.3 0.0 0.0	5.3
13	78.53 0.0 0.0	0.85 82.64 0.0 0.0	82.64 0.0 0.0	4.11 0.0 0.0	4.11
14	84.15 0.0 0.0	0.9 86.98 0.0 0.0	86.98 0.0 0.0	2.82 0.0 0.0	2.82
15	89.78 0.0 0.0	0.95 91.23 0.0 0.0	91.23 0.0 0.0	1.45 0.0 0.0	1.45
16	95.41 0.0 0.0	1.0 95.41 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01
17	10.99 0.0 0.0	10.99 0.0 0.0	10.99 0.0 0.0	0.0 0.0 0.0	0.01
18	32.1 0.0 0.0	0.36 41.45 0.0 0.0	41.45 0.0 0.0	9.36 0.0 0.0	9.36
19	53.2 0.0 0.0	0.6 61.7 0.0 0.0	61.7 0.0 0.0	8.5 0.0 0.0	8.5
20	74.31 0.0 0.0	0.81 79.32 0.0 0.0	79.32 0.0 0.0	5.01 0.0 0.0	5.01
21	95.41 0.0 0.0	1.0 95.41 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 6.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 4.6$

Mean colour reproduction index: $R^*_{ab,m} = 74$

OE580-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

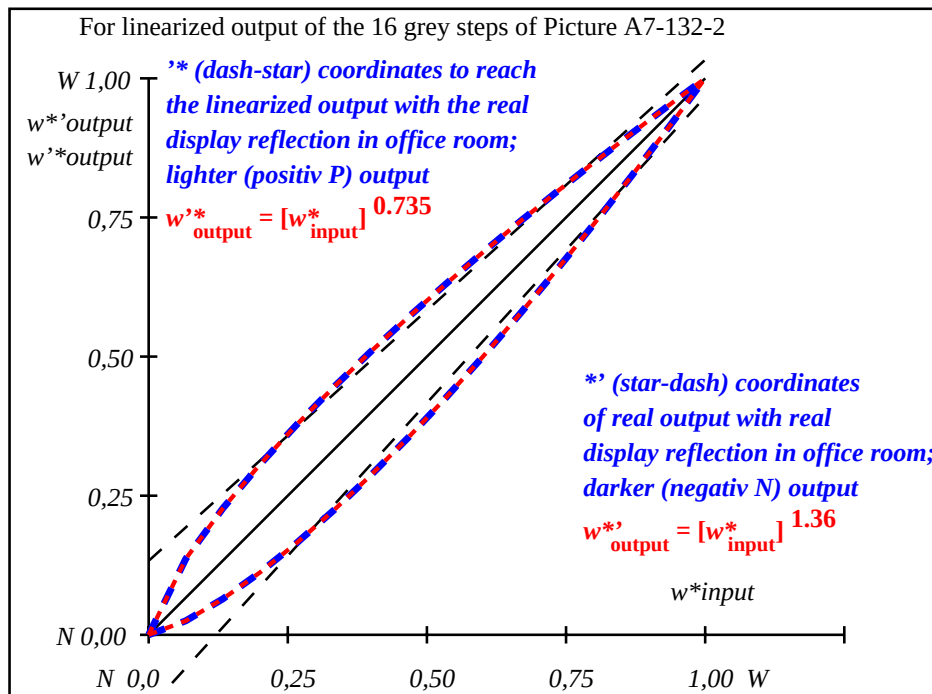

OE581-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolute)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.85$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.1	0.18	0.255	0.325	0.393	0.459	0.524	0.586	0.648	0.709	0.768	0.827	0.886	0.943	1.0

OE580-7N, Picture A7-132-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor


OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y6} = 72:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 132-2: $g_P=0.85; g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmeterik/OE58>




<http://130.149.60.45/~farbmeterik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
 F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



image pixel: 192 x 128
 384 x 256
 768 x 512
 1536 x 1024
 3072 x 2048



OE580-7, Picture D1W-133-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 colorimage

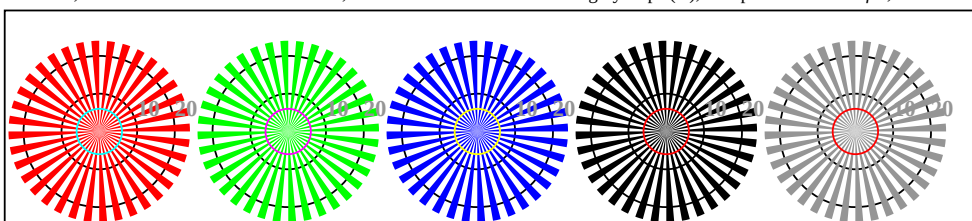

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-133-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-133-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
 Test chart according to ISO 9241-306, Annex E, C_{Y5} = 36:1

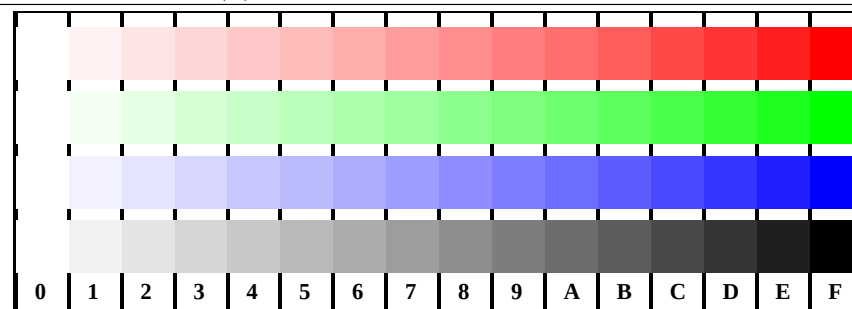


OE581-1, Picture D4W-L-133-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

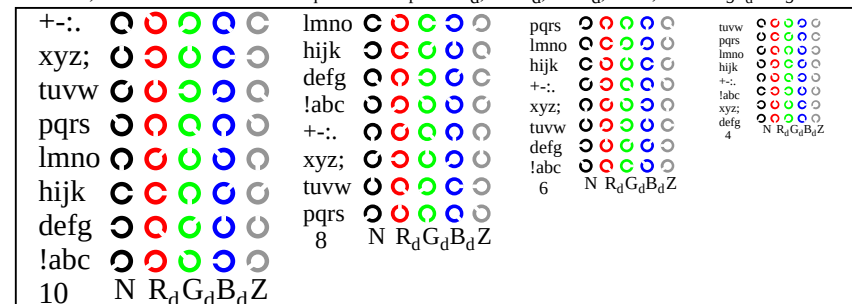

OE581-3, Picture D5W-133-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

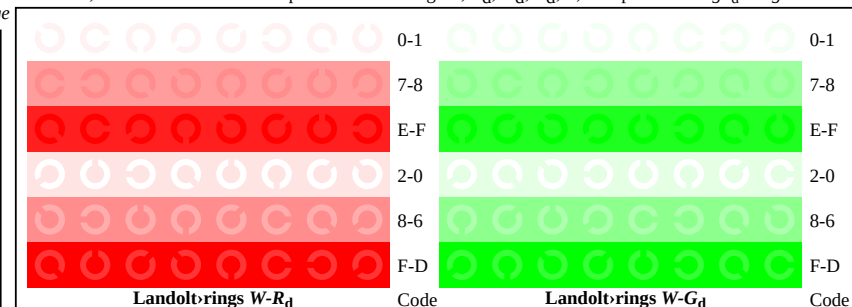


OE581-5, Picture D6W-L-133-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

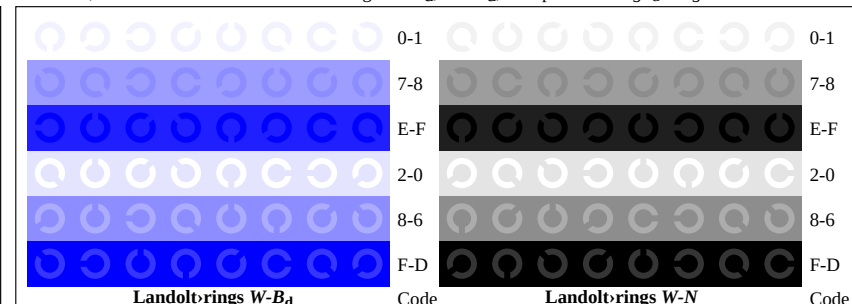


OE581-7, Picture D7W-L-133-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
 output 133-0: *g_P*=0.77; *g_N*=1.0



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
 application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> /.TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)

Test for the visual linearized output of Pictures D1W-133-0 to D7W-133-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-133-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-133-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-133-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-133-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-133-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
- or with computer system interpretation by "Display-PDF":.....
- or with software e. g. Adobe-Reader/-Acrobat and version:.....
- or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:

- either PS-file transfer "download, copy" to PS device.....
- or with computer system interpretation by "Display-PS":.....
- or with software e. g. Ghostscript and version:.....
- or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-133-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y5} = 36:1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-133-0

W-R _d White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-G _d White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-B _d White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-N White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-133-0

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-133-0, and D7W-133-0

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-133-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:
either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No
underline Yes/unknown
underline Yes/unknown
underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

underline Yes/No

Picture A7-133-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

picture A7-133-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

picture A7-133-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4 OE581-7N-133-1

input: *rgb* (->*rgb**_d) *setrgbcolor*
output 133-1: *g*_P=0.77; *g*_N=1.0

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	23.17 0.0 0.0	0.17 31.35 0.0	0.0 0.0 0.0	8.18 0.0 0.0	8.18
3	28.33 0.0 0.0	0.27 38.93 0.0	0.0 0.0 0.0	10.6 0.0 0.0	10.6
4	33.49 0.0 0.0	0.35 45.23 0.0	0.0 0.0 0.0	11.74 0.0 0.0	11.74
5	38.65 0.0 0.0	0.42 50.82 0.0	0.0 0.0 0.0	12.17 0.0 0.0	12.17
6	43.81 0.0 0.0	0.49 55.93 0.0	0.0 0.0 0.0	12.12 0.0 0.0	12.12
7	48.97 0.0 0.0	0.55 60.7 0.0	0.0 0.0 0.0	11.73 0.0 0.0	11.73
8	54.13 0.0 0.0	0.61 65.2 0.0	0.0 0.0 0.0	11.07 0.0 0.0	11.07
9	59.29 0.0 0.0	0.66 69.47 0.0	0.0 0.0 0.0	10.18 0.0 0.0	10.18
10	64.45 0.0 0.0	0.72 73.56 0.0	0.0 0.0 0.0	9.11 0.0 0.0	9.11
11	69.61 0.0 0.0	0.77 77.49 0.0	0.0 0.0 0.0	7.88 0.0 0.0	7.88
12	74.77 0.0 0.0	0.82 81.29 0.0	0.0 0.0 0.0	6.52 0.0 0.0	6.52
13	79.93 0.0 0.0	0.87 84.97 0.0	0.0 0.0 0.0	5.04 0.0 0.0	5.04
14	85.09 0.0 0.0	0.91 88.54 0.0	0.0 0.0 0.0	3.45 0.0 0.0	3.45
15	90.25 0.0 0.0	0.96 92.02 0.0	0.0 0.0 0.0	1.77 0.0 0.0	1.77
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	37.36 0.0 0.0	0.41 49.47 0.0	0.0 0.0 0.0	12.11 0.0 0.0	12.11
19	56.71 0.0 0.0	0.64 67.36 0.0	0.0 0.0 0.0	10.65 0.0 0.0	10.65
20	76.06 0.0 0.0	0.83 82.22 0.0	0.0 0.0 0.0	6.16 0.0 0.0	6.16
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.6$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.8$

Mean colour reproduction index: $R^*_{ab,m} = 67$

OE580-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

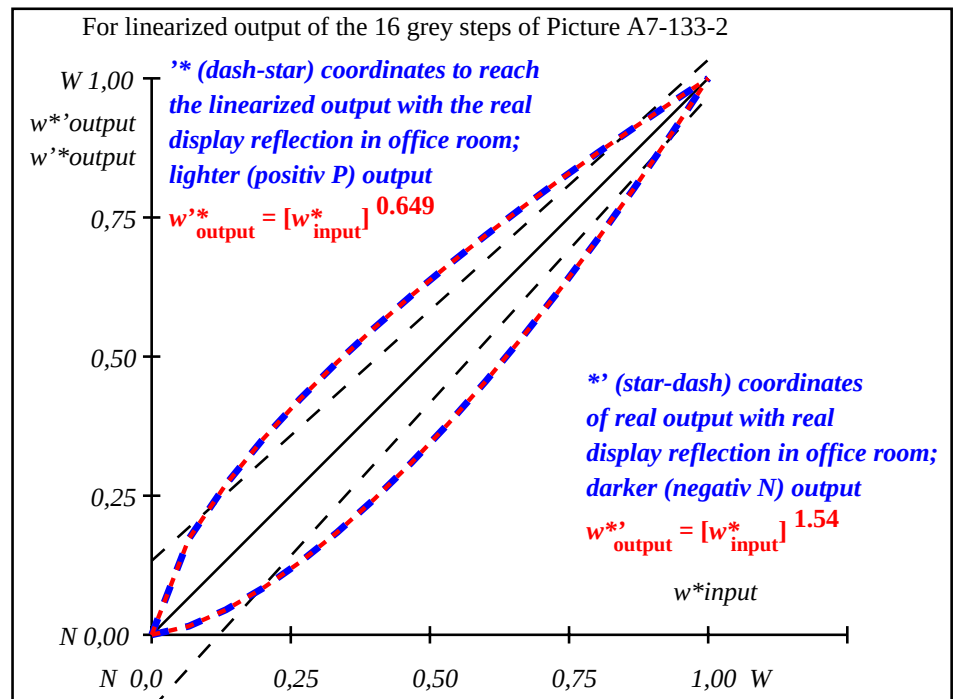

OE581-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.78$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.123	0.209	0.287	0.359	0.426	0.492	0.554	0.614	0.673	0.731	0.786	0.841	0.895	0.948	1.0

OE580-7N, Picture A7-133-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* setrgbcolor$

OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y5} = 36:1$


input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 133-2: $g_P=0.77$; $g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)




OE580-7, Picture B1-134-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 colorimage

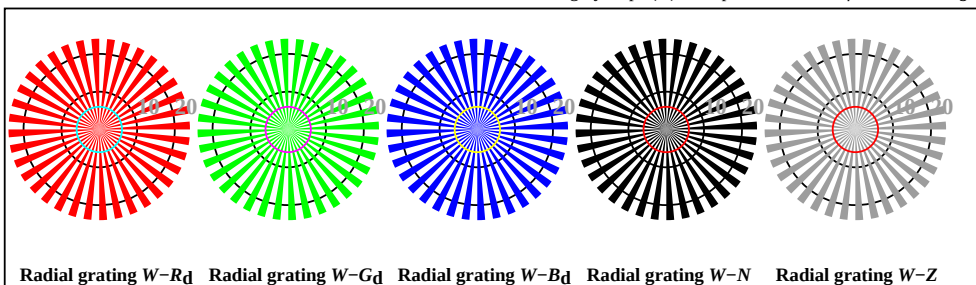


OE580-5, Picture D2W-134-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-134-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y4} = 18:1

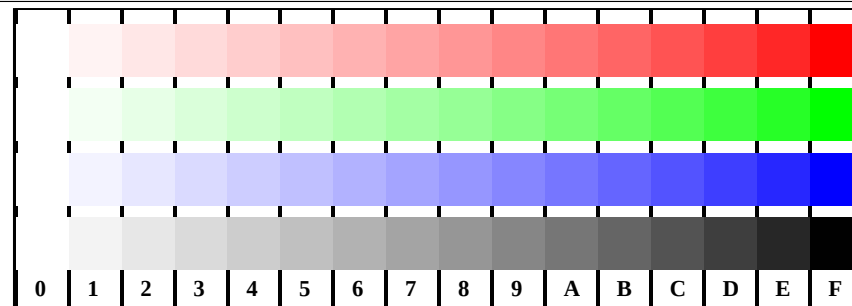


OE581-1, Picture D4W-L-134-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

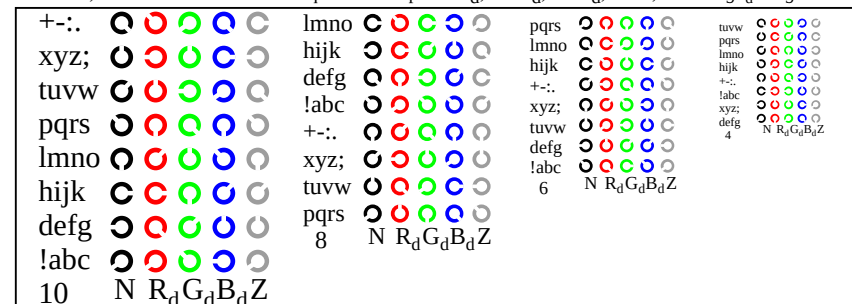


OE581-3, Picture D5W-134-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

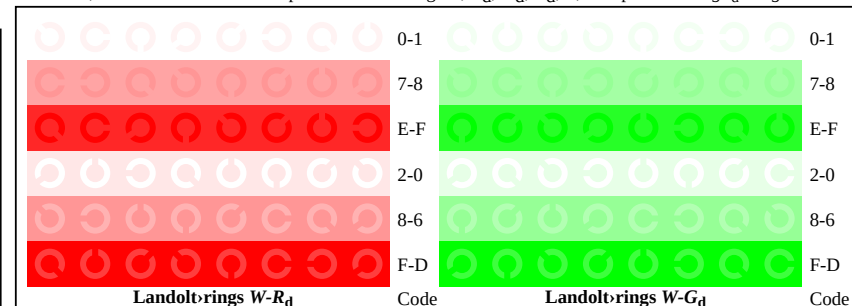

OE581-5, Picture D6W-L-134-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

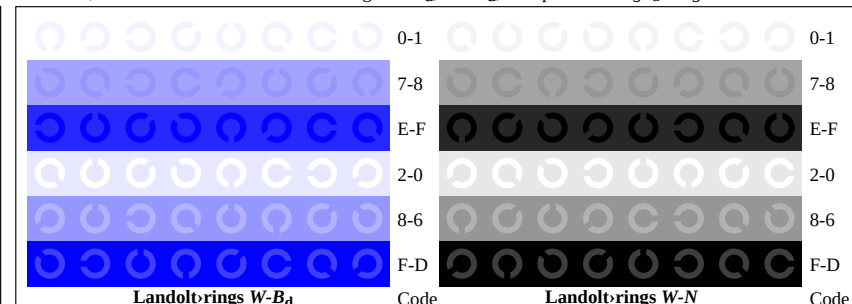

OE581-7, Picture D7W-L-134-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$



input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
output 134-0: *g_P*=0.7; *g_N*=1.0

Test for the visual linearized output of Pictures D1W-134-0 to D7W-134-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-134-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....

Test of the resolution of radial gratings $W-R_d$, $W-G_d$, $W-B_d$ according to picture D2W-134-0

	$W-R_d$	$W-G_d$	$W-B_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-134-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture D3W-134-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-134-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:
either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer
Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:
either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:
either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-134-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y4} = 18:1$

Test of 16 visually equally spaced steps of the colour rows $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to picture D4W-134-0

$W-R_d$ White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-G_d$ White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-B_d$ White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-N$ White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-134-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R_d	Ring G_d	Ring B_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to pictures D6W-134-0, and D7W-134-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-R_d$ background - ring	Colour row $W-G_d$ background - ring	Colour row $W-B_d$ background - ring	Colour row $W-N$ background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-134-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/No
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-134-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

picture A7-134-2

colour measurement and specification for:
CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No
If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T
Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No
If No, please describe other method:

Part 4 OE581-7N-134-1

input: $rgb (->rgb^*_d)$ setrgbcolor
output 134-1: $g_p=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	31.42 0.0 0.0	0.21 41.05 0.0	0.0 0.0 0.0	9.63 0.0 0.0	9.63
3	35.99 0.0 0.0	0.31 48.1 0.0	0.0 0.0 0.0	12.11 0.0 0.0	12.11
4	40.56 0.0 0.0	0.39 53.75 0.0	0.0 0.0 0.0	13.18 0.0 0.0	13.18
5	45.13 0.0 0.0	0.46 58.64 0.0	0.0 0.0 0.0	13.51 0.0 0.0	13.51
6	49.7 0.0 0.0	0.53 63.05 0.0	0.0 0.0 0.0	13.34 0.0 0.0	13.34
7	54.27 0.0 0.0	0.59 67.09 0.0	0.0 0.0 0.0	12.82 0.0 0.0	12.82
8	58.84 0.0 0.0	0.64 70.87 0.0	0.0 0.0 0.0	12.02 0.0 0.0	12.02
9	63.41 0.0 0.0	0.69 74.42 0.0	0.0 0.0 0.0	11.01 0.0 0.0	11.01
10	67.99 0.0 0.0	0.74 77.79 0.0	0.0 0.0 0.0	9.81 0.0 0.0	9.81
11	72.56 0.0 0.0	0.79 81.01 0.0	0.0 0.0 0.0	8.46 0.0 0.0	8.46
12	77.13 0.0 0.0	0.84 84.1 0.0	0.0 0.0 0.0	6.97 0.0 0.0	6.97
13	81.7 0.0 0.0	0.88 87.07 0.0	0.0 0.0 0.0	5.37 0.0 0.0	5.37
14	86.27 0.0 0.0	0.92 89.94 0.0	0.0 0.0 0.0	3.67 0.0 0.0	3.67
15	90.84 0.0 0.0	0.96 92.71 0.0	0.0 0.0 0.0	1.88 0.0 0.0	1.88
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	43.99 0.0 0.0	0.45 57.47 0.0	0.0 0.0 0.0	13.48 0.0 0.0	13.48
19	61.13 0.0 0.0	0.67 72.67 0.0	0.0 0.0 0.0	11.54 0.0 0.0	11.54
20	78.27 0.0 0.0	0.85 84.85 0.0	0.0 0.0 0.0	6.58 0.0 0.0	6.58
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.3$

Mean colour reproduction index: $R^*_{ab,m} = 64$

OE580-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

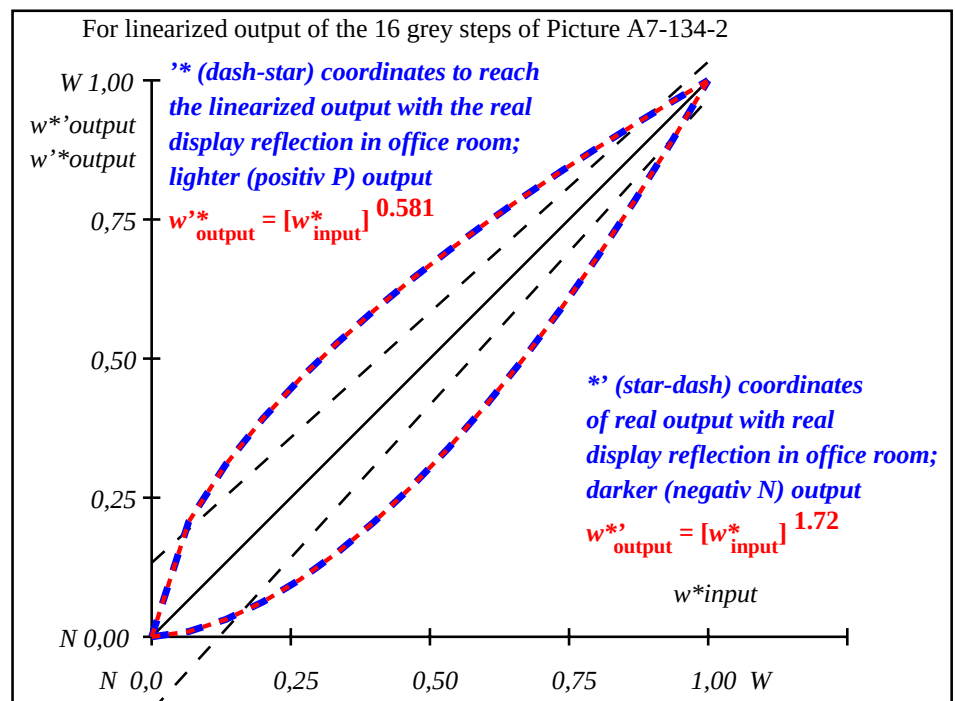

OE581-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.7$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.151	0.244	0.324	0.397	0.463	0.527	0.587	0.644	0.699	0.753	0.805	0.855	0.905	0.953	1.0

OE580-7N, Picture A7-134-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$


OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y4} = 18:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 134-2: $g_P=0.7$; $g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>




<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
 F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



image pixel: 192 x 128
 384 x 256
 768 x 512
 1536 x 1024
 3072 x 2048



OE580-7, Picture B1-135-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 colorimage

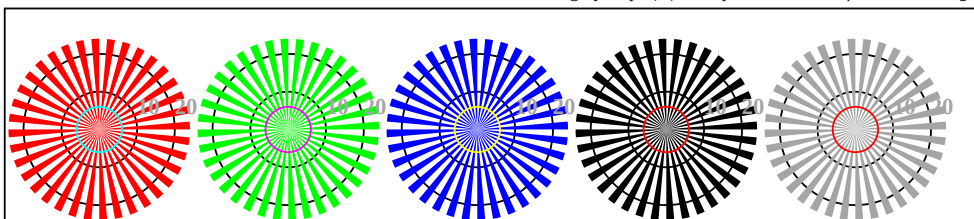

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-135-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-135-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
 Test chart according to ISO 9241-306, Annex E, C_{Y3} = 9:1

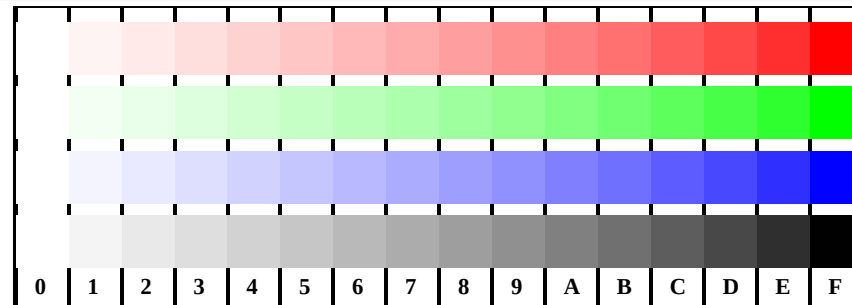


OE581-1, Picture D4W-L-135-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

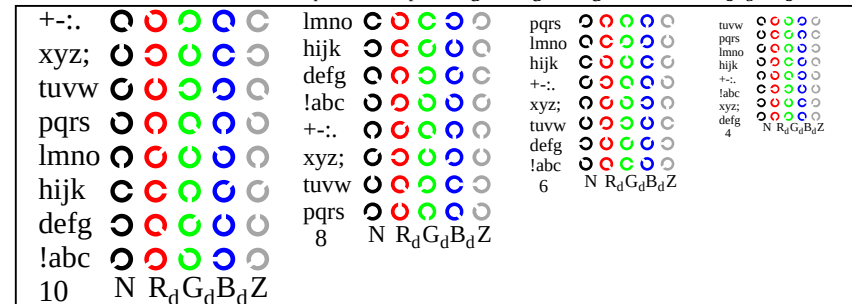

OE581-3, Picture D5W-135-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

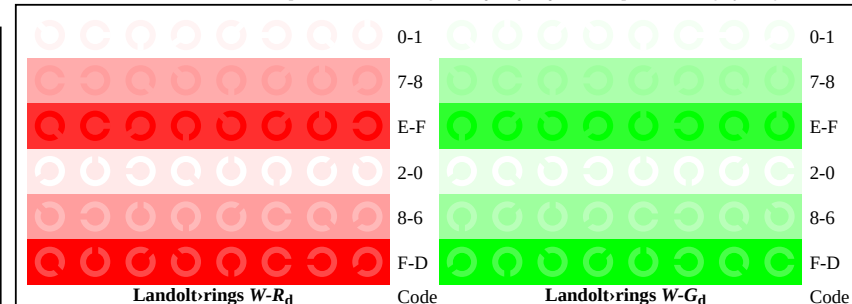


OE581-5, Picture D6W-L-135-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

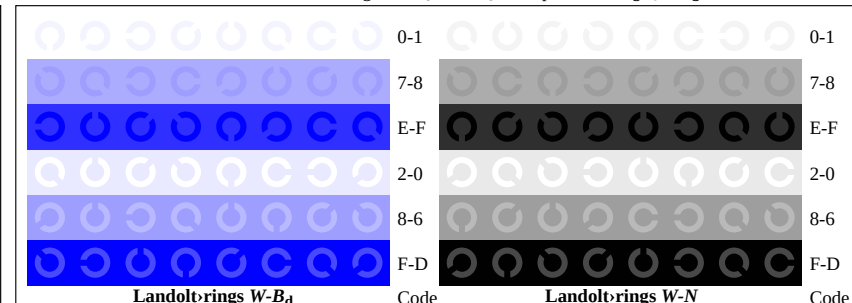


OE581-7, Picture D7W-L-135-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
 output 135-0: *g_P*=0.62; *g_N*=1.0



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
 application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> / .TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS / .TXT in File (F)

Test for the visual linearized output of Pictures D1W-135-0 to D7W-135-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-135-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-135-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-135-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-135-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-135-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-135-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y3} = 9:1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-135-0

W-R _d White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-G _d White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-B _d White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-N White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-135-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-135-0, and D7W-135-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-135-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-135-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0) compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

picture A7-135-2 underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

picture A7-135-2 or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No

If No, please describe other method:

Part 4 OE581-7N-135-1

input: *rgb* (->*rgb**_d) *setrgbcolor*
output 135-1: *g*_p=0.62; *g*_N=1.0

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	37.99 0.0 0.0	0.0 37.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	41.81 0.0 0.0	0.24 51.79 0.0	0.0 0.0 9.98	0.0 0.0 9.98	9.98
3	45.64 0.0 0.0	0.35 57.87 0.0	0.0 0.0 12.23	0.0 0.0 12.23	12.23
4	49.47 0.0 0.0	0.43 62.6 0.0	0.0 0.0 13.13	0.0 0.0 13.13	13.13
5	53.3 0.0 0.0	0.5 66.63 0.0	0.0 0.0 13.33	0.0 0.0 13.33	13.33
6	57.13 0.0 0.0	0.56 70.19 0.0	0.0 0.0 13.07	0.0 0.0 13.07	13.07
7	60.96 0.0 0.0	0.62 73.44 0.0	0.0 0.0 12.48	0.0 0.0 12.48	12.48
8	64.78 0.0 0.0	0.67 76.44 0.0	0.0 0.0 11.65	0.0 0.0 11.65	11.65
9	68.61 0.0 0.0	0.72 79.23 0.0	0.0 0.0 10.62	0.0 0.0 10.62	10.62
10	72.44 0.0 0.0	0.76 81.87 0.0	0.0 0.0 9.43	0.0 0.0 9.43	9.43
11	76.27 0.0 0.0	0.81 84.37 0.0	0.0 0.0 8.11	0.0 0.0 8.11	8.11
12	80.1 0.0 0.0	0.85 86.76 0.0	0.0 0.0 6.66	0.0 0.0 6.66	6.66
13	83.93 0.0 0.0	0.89 89.05 0.0	0.0 0.0 5.12	0.0 0.0 5.12	5.12
14	87.75 0.0 0.0	0.93 91.24 0.0	0.0 0.0 3.49	0.0 0.0 3.49	3.49
15	91.58 0.0 0.0	0.96 93.36 0.0	0.0 0.0 1.78	0.0 0.0 1.78	1.78
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	37.99 0.0 0.0	0.0 37.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	52.34 0.0 0.0	0.48 65.67 0.0	0.0 0.0 13.33	0.0 0.0 13.33	13.33
19	66.7 0.0 0.0	0.69 77.86 0.0	0.0 0.0 11.16	0.0 0.0 11.16	11.16
20	81.05 0.0 0.0	0.86 87.34 0.0	0.0 0.0 6.29	0.0 0.0 6.29	6.29
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.2$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.2$

Mean colour reproduction index: $R^*_{ab,m} = 65$

OE580-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

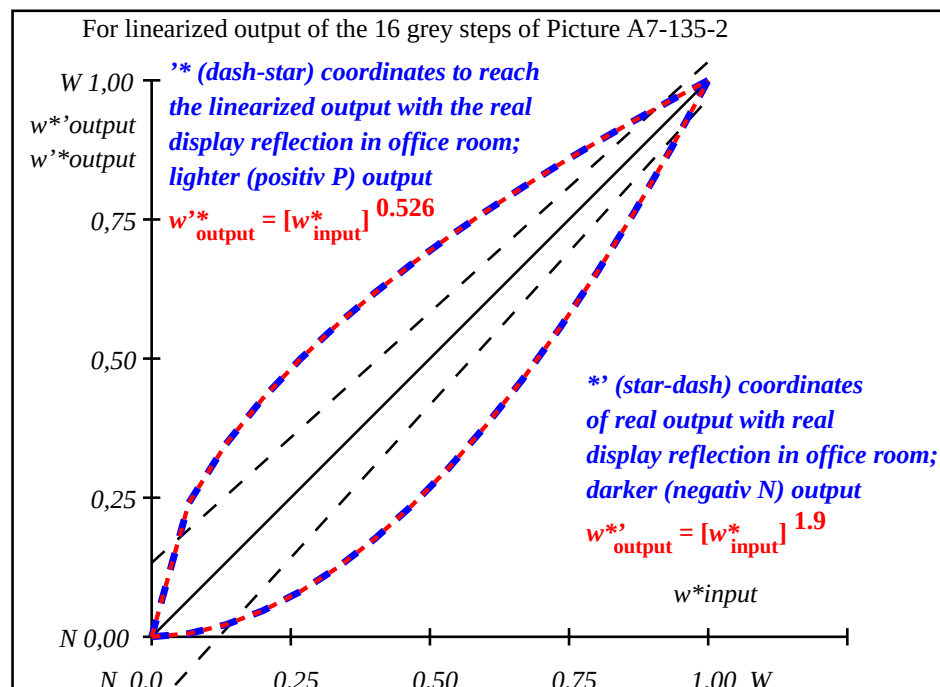

OE581-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolute)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.63$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB}, r$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.185	0.283	0.366	0.438	0.503	0.564	0.621	0.675	0.727	0.776	0.824	0.87	0.915	0.958	1.0

OE580-7N, Picture A7-135-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* setrgbcolor$


OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y3} = 9:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 135-2: $g_P=0.62; g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>



<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
 F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



OE580-7, Picture B1-136-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 colorimage

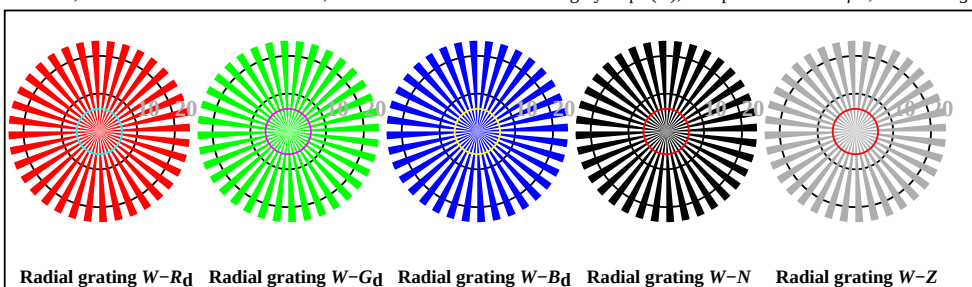


OE580-5, Picture D2W-136-0: Radial gratings W-Rd; W-Gd; W-Bd; W-N; PS operator $\rightarrow rgb_d$ setrgbcolor




OE580-7, Picture D3W-136-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow rgb_d$ setrgbcolor


OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
 Test chart according to ISO 9241-306, Annex E, $C_{Y2} = 4,5:1$

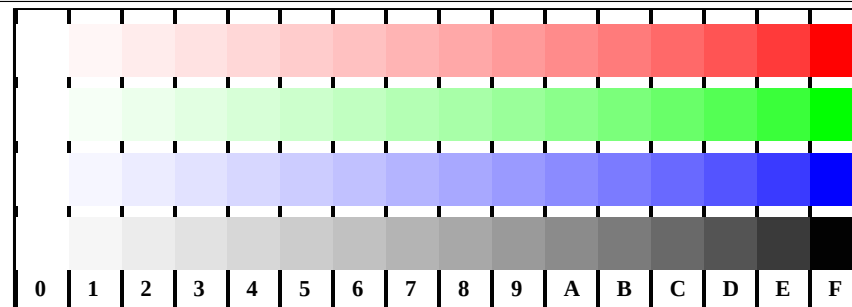


OE581-1, Picture D4W-L-136-0: 16 equidistant steps W-Rd; W-Gd; W-Bd; W-N; PS: $\rightarrow rgb_d$ setrgbcolor

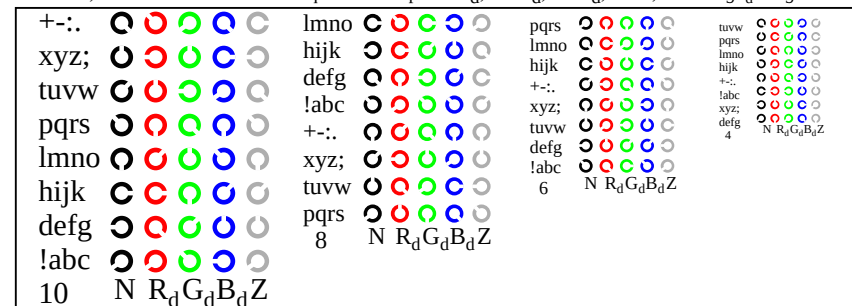

OE581-3, Picture D5W-136-0: Script and Landolt-rings N; Rd; Gd; Bd; Z; PS operator $\rightarrow rgb_d$ setrgbcolor

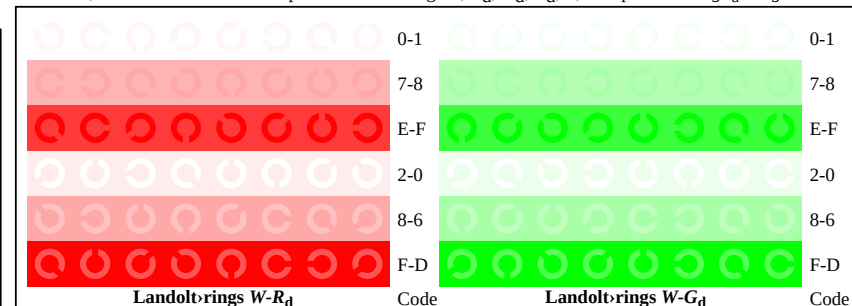


OE581-5, Picture D6W-L-136-0: Landolt-rings W-Rd; W-Gd; PS operator $\rightarrow rgb_d$ setrgbcolor

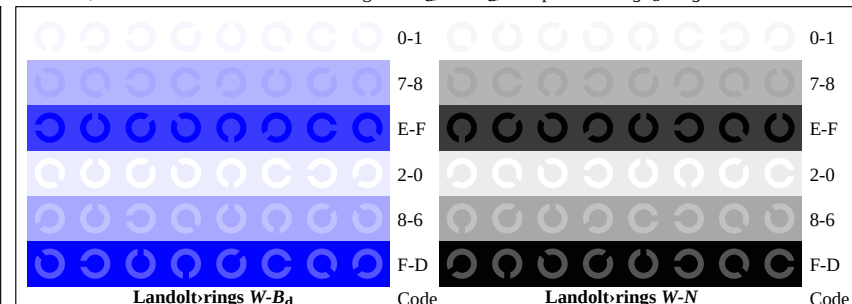


OE581-7, Picture D7W-L-136-0: Landolt-rings W-Bd; W-N; PS operator $\rightarrow rgb_d$ setrgbcolor

input: *rgb* ($\rightarrow rgb_d$) setrgbcolor
 output 136-0: $g_P=0.55$; $g_N=1.0$



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
 application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta



Test for the visual linearized output of Pictures D1W-136-0 to D7W-136-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-136-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-136-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-136-0, if an offset print is available
Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-136-0
Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1 OE580-3N-136-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
- or with computer system interpretation by "Display-PDF":.....
- or with software e. g. Adobe-Reader/-Acrobat and version:.....
- or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:

- either PS-file transfer "download, copy" to PS device.....
- or with computer system interpretation by "Display-PS":.....
- or with software e. g. Ghostscript and version:.....
- or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3 OE580-7N-136-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y2} = 4,5:1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-136-0

W-R _d White - Orangered:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-G _d White - Leafgreen:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-B _d White - Violetblue:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps
W-N White - Black:	Are all the 16 steps distinguishable?	Yes/No
	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-136-0
Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-136-0, and D7W-136-0
Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2 OE581-3N-136-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-136-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0) compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

picture A7-136-2 underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

picture A7-136-2 or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No

If No, please describe other method:

Part 4 OE581-7N-136-1

input: *rgb* (->*rgb**_d) *setrgbcolor*
output 136-1: *g_P*=0.55; *g_N*=1.0

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	54.91 0.0 0.0	0.27 63.82 0.0	0.0 0.0 0.0	8.91 0.0 0.0	8.91
3	57.8 0.0 0.0	0.38 68.49 0.0	0.0 0.0 0.0	10.69 0.0 0.0	10.69
4	60.7 0.0 0.0	0.46 72.03 0.0	0.0 0.0 0.0	11.34 0.0 0.0	11.34
5	63.59 0.0 0.0	0.53 75.0 0.0	0.0 0.0 0.0	11.41 0.0 0.0	11.41
6	66.48 0.0 0.0	0.59 77.61 0.0	0.0 0.0 0.0	11.12 0.0 0.0	11.12
7	69.37 0.0 0.0	0.64 79.95 0.0	0.0 0.0 0.0	10.57 0.0 0.0	10.57
8	72.27 0.0 0.0	0.69 82.1 0.0	0.0 0.0 0.0	9.83 0.0 0.0	9.83
9	75.16 0.0 0.0	0.74 84.09 0.0	0.0 0.0 0.0	8.93 0.0 0.0	8.93
10	78.05 0.0 0.0	0.78 85.96 0.0	0.0 0.0 0.0	7.91 0.0 0.0	7.91
11	80.95 0.0 0.0	0.82 87.72 0.0	0.0 0.0 0.0	6.78 0.0 0.0	6.78
12	83.84 0.0 0.0	0.86 89.4 0.0	0.0 0.0 0.0	5.56 0.0 0.0	5.56
13	86.73 0.0 0.0	0.9 91.0 0.0	0.0 0.0 0.0	4.26 0.0 0.0	4.26
14	89.62 0.0 0.0	0.93 92.53 0.0	0.0 0.0 0.0	2.9 0.0 0.0	2.9
15	92.52 0.0 0.0	0.97 93.99 0.0	0.0 0.0 0.0	1.48 0.0 0.0	1.48
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	62.87 0.0 0.0	0.51 74.3 0.0	0.0 0.0 0.0	11.43 0.0 0.0	11.43
19	73.71 0.0 0.0	0.72 83.11 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
20	84.56 0.0 0.0	0.87 89.81 0.0	0.0 0.0 0.0	5.24 0.0 0.0	5.24
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.0$


Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.2$

Mean colour reproduction index: $R^*_{ab,m} = 70$

OE580-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

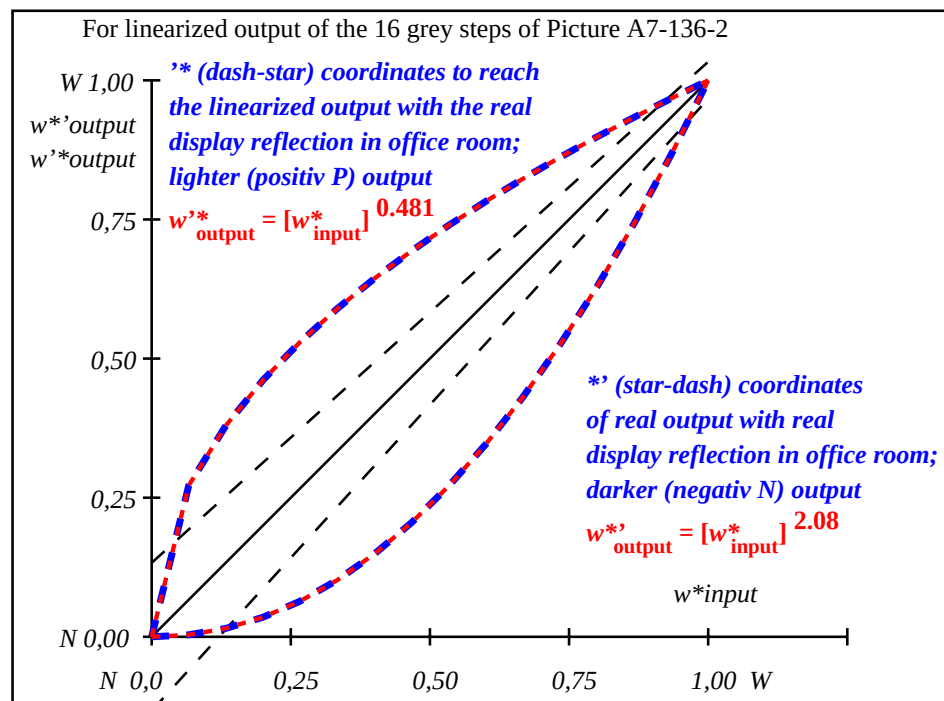

OE581-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

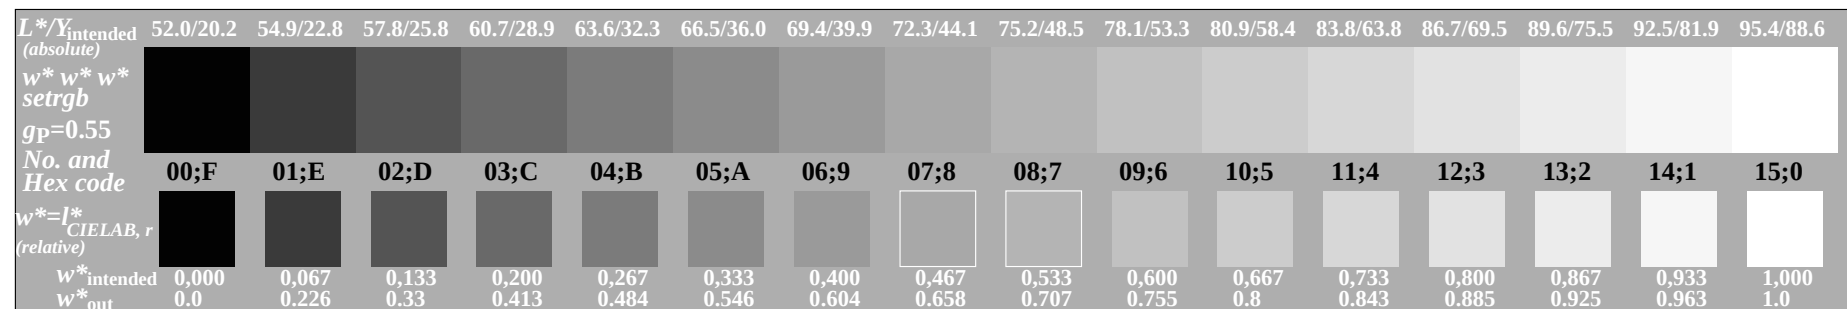


OE580-7N, Picture A7-136-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* setrgbcolor$

OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y2} = 4.5:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 136-2: $g_P=0.55$; $g_N=1.0$


TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmeterik/OE58>



<http://130.149.60.45/~farbmeterik/OE58/OE58D0NA.PS /.TXT>; linearized output, Page 1/3
 F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)



TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
 application for output of displays: monitor systems or data projector systems

V

L

O

Y

M

C


B



image pixel: 192 x 128
 384 x 256
 768 x 512
 1536 x 1024
 3072 x 2048



OE580-7, Picture B1-137-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 colorimage

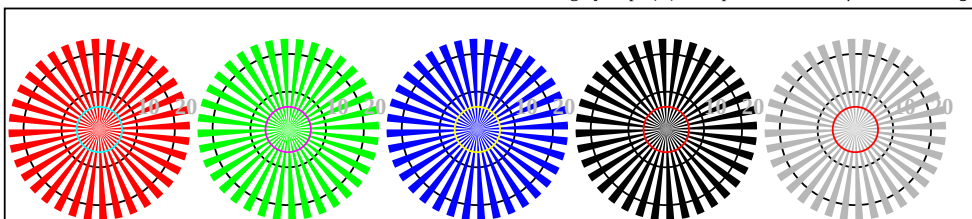

Radial grating W-R_d Radial grating W-G_d Radial grating W-B_d Radial grating W-N Radial grating W-Z


OE580-5, Picture D2W-137-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE580-7, Picture D3W-137-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$




OE58: Test chart 4 according to ISO 15775, TR 24705; 1MR, DH
 Test chart according to ISO 9241-306, Annex E, C_{Y1} = 2,25:1

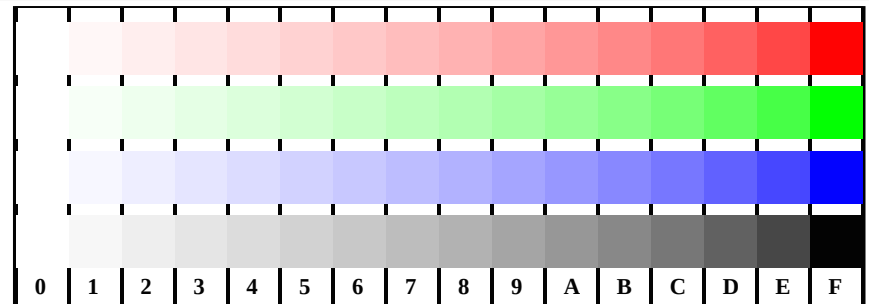


OE581-1, Picture D4W-L-137-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

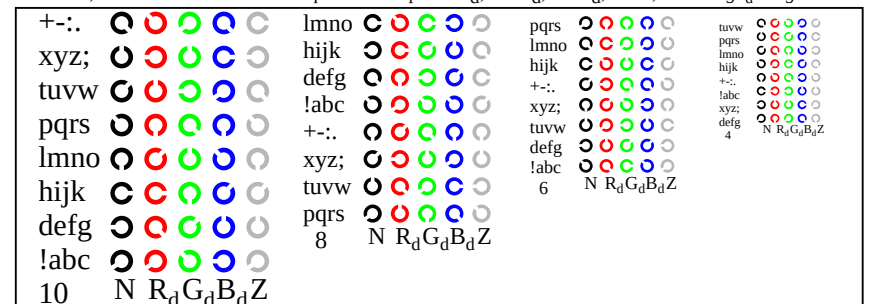

OE581-3, Picture D5W-137-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

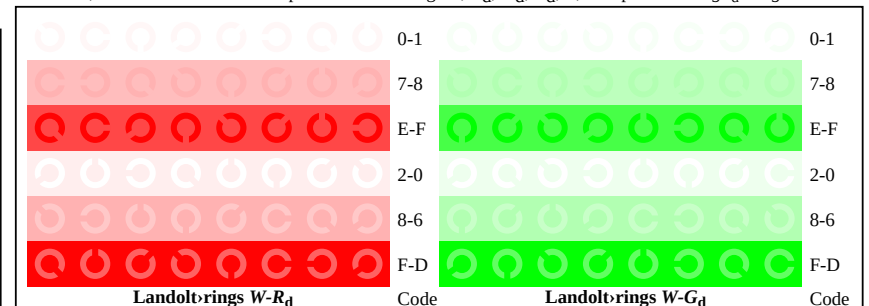


OE581-5, Picture D6W-L-137-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

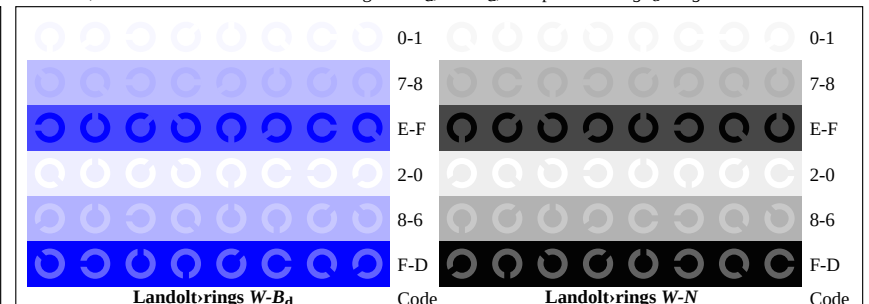

OE581-7, Picture D7W-L-137-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
 output 137-0: *g_P*=0.47; *g_N*=1.0



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

<http://130.149.60.45/~farbmetrik/OE58/OE58D0NA.PS> /.TXT; linearized output, Page 2/3
F: Output Linearization (OL) data OE58/OE58D0NA.PS /.TXT in File (F)

Test for the visual linearized output of Pictures D1W-137-0 to D7W-137-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-137-0, if an offset print is available

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No

Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings W-R_d, W-G_d, W-B_d according to picture D2W-137-0

	W-R _d	W-G _d	W-B _d	W-N	W-Z
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-137-0, if an offset print is available

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture D3W-137-0

Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1

OE580-3N-137-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D1PX.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D1PX.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3

OE580-7N-137-1

OE58: Form A for test chart 4 according to ISO 15775; 1MR, DH
Test chart according to ISO 9241-306, Annex E, C_{Y1} = 2,25:1

Test of 16 visually equally spaced steps of the colour rows W-R_d, W-G_d, W-B_d and W-N according to picture D4W-137-0

Colour row	Test	Are all the 16 steps distinguishable?	If No: How many steps can be distinguished?	of the given 16 steps	Yes/No
W-R _d White - Orangered:					
W-G _d White - Leafgreen:					
W-B _d White - Violetblue:					
W-N White - Black:					

Test of characters and Landolt-rings in four sizes according to picture D5W-137-0

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R _d	Ring G _d	Ring B _d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings W-R_d, W-G_d, W-B_d and W-N according to pictures D6W-137-0, and D7W-137-0

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row W-R _d background - ring	Colour row W-G _d background - ring	Colour row W-B _d background - ring	Colour row W-N background - ring
0 - 1	0 - 1	0 - 1	0 - 1
7 - 8	7 - 8	7 - 8	7 - 8
E - F	E - F	E - F	E - F
2 - 0	2 - 0	2 - 0	2 - 0
8 - 6	8 - 6	8 - 6	8 - 6
F - D	F - D	F - D	F - D

Part 2

OE581-3N-137-1

Documentation of assessor colour vision properties for visual assessment

The assessor has normal colour vision according to one test: underline Yes/No
either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
or with test charts using colour points according to Ishihara underline Yes/unknown
or tested with, please specify: underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS> underline Yes/No

Picture A7-137-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0) compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PDF>

picture A7-137-2 underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE58/OE58D1PX.PS>

picture A7-137-2 or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No

If No, please describe other method:

Part 4

OE581-7N-137-1


input: *rgb* (->*rgb**_d) *setrgbcolor*
output 137-1: *g_p*=0.47; *g_N*=1.0

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rhta4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start output S1
1	69.7 0.0 0.0	0.0 0.0 0.0	69.7 0.0 0.0	0.0 0.0 0.0	0.01	Specification according to
2	71.41 0.0 0.0	0.3 0.0 0.0	77.46 0.0 0.0	6.04 0.0 0.0	6.04	ISO/IEC 15775 Annex G
3	73.13 0.0 0.0	0.41 0.0 0.0	80.24 0.0 0.0	7.11 0.0 0.0	7.11	and DIN 33866-1 Annex G
4	74.84 0.0 0.0	0.49 0.0 0.0	82.31 0.0 0.0	7.47 0.0 0.0	7.47	
5	76.55 0.0 0.0	0.56 0.0 0.0	84.02 0.0 0.0	7.47 0.0 0.0	7.47	
6	78.27 0.0 0.0	0.62 0.0 0.0	85.51 0.0 0.0	7.24 0.0 0.0	7.24	
7	79.98 0.0 0.0	0.67 0.0 0.0	86.84 0.0 0.0	6.86 0.0 0.0	6.86	
8	81.7 0.0 0.0	0.71 0.0 0.0	88.05 0.0 0.0	6.35 0.0 0.0	6.35	
9	83.41 0.0 0.0	0.76 0.0 0.0	89.17 0.0 0.0	5.76 0.0 0.0	5.76	
10	85.12 0.0 0.0	0.8 0.0 0.0	90.21 0.0 0.0	5.08 0.0 0.0	5.08	
11	86.84 0.0 0.0	0.84 0.0 0.0	91.19 0.0 0.0	4.35 0.0 0.0	4.35	
12	88.55 0.0 0.0	0.87 0.0 0.0	92.11 0.0 0.0	3.56 0.0 0.0	3.56	
13	90.27 0.0 0.0	0.91 0.0 0.0	92.99 0.0 0.0	2.73 0.0 0.0	2.73	
14	91.98 0.0 0.0	0.94 0.0 0.0	93.83 0.0 0.0	1.85 0.0 0.0	1.85	
15	93.7 0.0 0.0	0.97 0.0 0.0	94.64 0.0 0.0	0.94 0.0 0.0	0.94	Mean lightness difference (16 steps)
16	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 4.6$
17	69.7 0.0 0.0	0.0 0.0 0.0	69.7 0.0 0.0	0.0 0.0 0.0	0.01	
18	76.13 0.0 0.0	0.54 0.0 0.0	83.62 0.0 0.0	7.5 0.0 0.0	7.5	
19	82.55 0.0 0.0	0.74 0.0 0.0	88.62 0.0 0.0	6.06 0.0 0.0	6.06	
20	88.98 0.0 0.0	0.88 0.0 0.0	92.34 0.0 0.0	3.35 0.0 0.0	3.35	Mean lightness difference (5 steps)
21	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 3.4$
Mean colour reproduction index:					$R^*_{ab,m} = 80$	

OE580-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

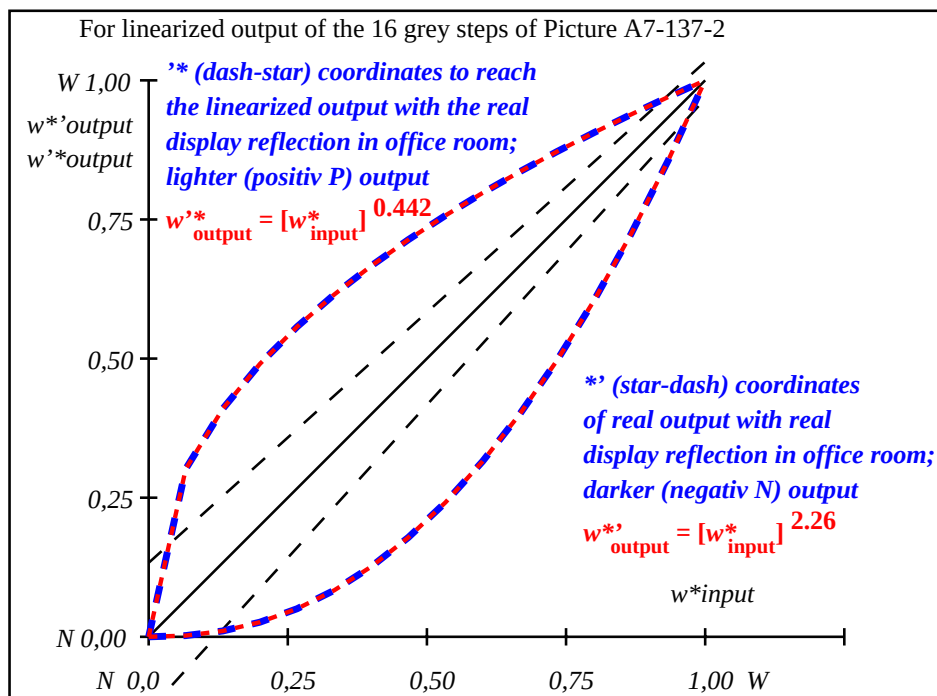

OE581-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.48$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.277	0.384	0.466	0.534	0.593	0.647	0.697	0.742	0.785	0.825	0.863	0.899	0.934	0.968	1.0

OE580-7N, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE58: In-output relation according to ISO 9241-306; 1MR, DH
Test chart according to ISO 9241-306, Annex E, $C_{Y1} = 2,25:1$

input: $rgb \rightarrow rgb^*_D$ setrgbcolor
output 137-2: $g_P=0.47$; $g_N=1.0$

TUB registration: 20110801-OE58/OE58D0NA.PS /.TXT
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta