

Immettere y uscita: Offset Reflective System ORS18a


Dati del dispositivo (d) o
colori elementari (e): H^*_e codice di tonalità per i colori
questa pagina: $H^*_e = R00Y_e, R25Y_e, \dots, B75R_e$

ORS20a; dati atti CIELAB (a)

H^*_e	$L^*=L^*_a a^*_a$	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R00Y_100_100_e	47.6	64.9	30.9	71.9
R25Y_100_100_e	51.5	54.2	47.2	71.9
R50Y_100_100_e	60.3	35.6	59.0	68.9
R75Y_100_100_e	70.4	17.0	72.2	74.1
Y00G_100_100_e	82.9	-3.5	87.8	87.9
Y25G_100_100_e	76.9	-25.5	75.9	80.1
Y50G_100_100_e	65.8	-41.4	54.4	68.3
Y75G_100_100_e	56.9	-56.3	38.1	68.0
G00B_100_100_e	52.4	-67.1	21.5	70.5
G25B_100_100_e	54.6	-53.2	-9.0	53.9
G50B_100_100_e	56.6	-39.7	-29.9	49.8
G75B_100_100_e	52.7	-21.1	-44.1	48.9
B00R_100_100_e	37.9	1.3	-45.4	45.4
B25R_100_100_e	26.7	26.6	-45.8	52.9
B50R_100_100_e	34.8	49.2	-30.0	57.7
B75R_100_100_e	47.3	71.5	-9.9	72.1

ORS20a; dati atti CIELAB (a)

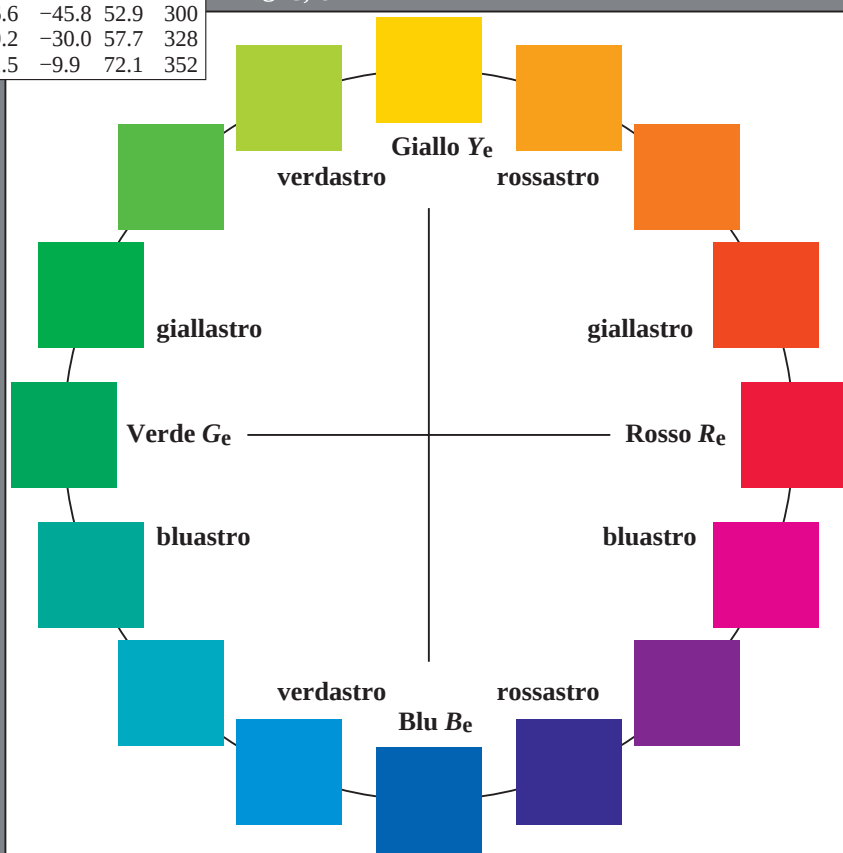
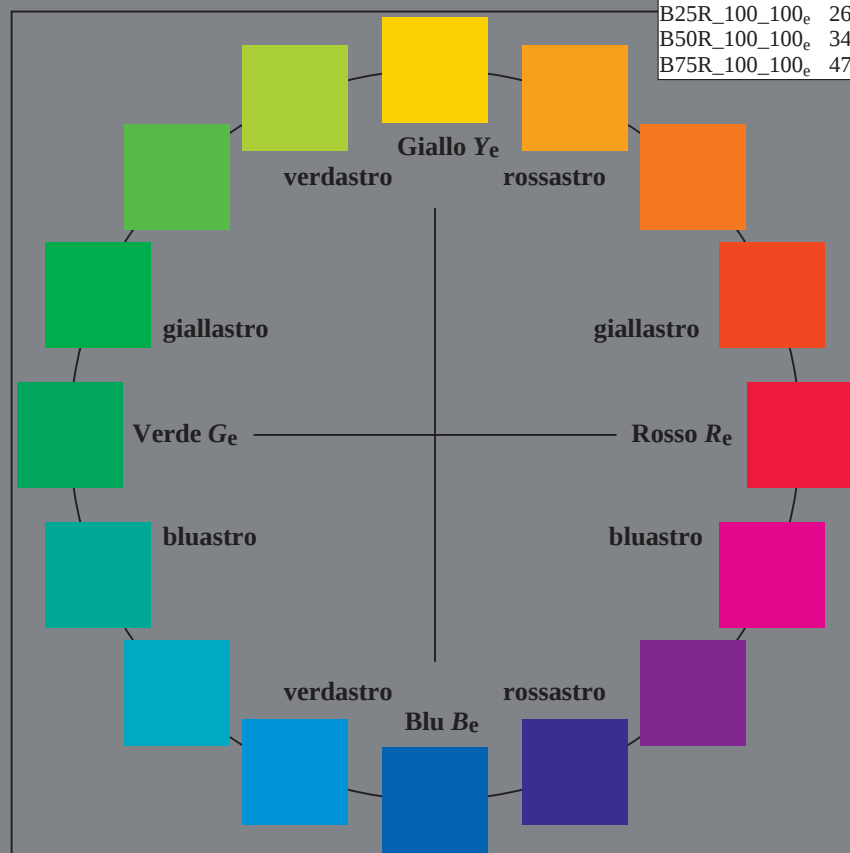
name	$L^*=L^*_a a^*_a$	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R_e, Ma	47.6	64.9	30.9	71.9
Y_e, Ma	82.9	-3.5	87.8	87.9
G_e, Ma	52.4	-67.1	21.5	70.5
C_e, Ma	56.6	-39.7	-29.9	49.8
B_e, Ma	37.9	1.3	-45.4	45.4
M_e, Ma	34.8	49.2	-30.0	57.7
N_e, Ma	17.7	0.0	0.0	0.0
W_e, Ma	95.4	0.0	0.0	0.0
R_e, CIE	39.9	58.7	27.9	65.0
Y_e, CIE	81.2	-2.8	71.5	71.6
G_e, CIE	52.2	-42.4	13.6	44.5
B_e, CIE	30.5	1.4	-46.4	46.4



%Gamma

 $u^*_{rel} = 92$

%Regularità

 $g^*_{H,rel} = 57$ $g^*_{C,rel} = 58$ 

4-113130-L0 PI830-73

grafico TUB-PI83; cerchio delle tinte a 16 passi

grafico conformemente a DIN 33872, 3D=1, de=1, cmyk*

Input: $rgb/cmyk \rightarrow rgb_{de}$ Output: 3D-linearizzazione a $cmyk^*_{de}$