

Immettere y uscita: Printer Reflective System FRS06a

Dati del dispositivo (d) o  
colori elementari (e):


$H^*_d$

codice di tonalità per i colori  
questa pagina:

$H^*_d = R00Y_d, R25Y_d, \dots, B75R_d$

**LRS18a; dati atti CIELAB (a)**

| $H^*_d$        | $L^*=L^*_a a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|----------------|-------------------|---------|--------------|--------------|
| R00Y_100_100_d | 47.5              | 57.2    | 37.8         | 68.6         |
| R25Y_100_100_d | 57.4              | 43.5    | 54.5         | 69.7         |
| R50Y_100_100_d | 70.5              | 19.2    | 66.2         | 69.0         |
| R75Y_100_100_d | 83.5              | -2.9    | 76.8         | 76.9         |
| Y00G_100_100_d | 91.5              | -15.8   | 84.6         | 86.1         |
| Y25G_100_100_d | 90.4              | -20.9   | 86.5         | 89.0         |
| Y50G_100_100_d | 70.9              | -41.7   | 54.8         | 68.9         |
| Y75G_100_100_d | 60.1              | -57.9   | 39.6         | 70.2         |
| G00B_100_100_d | 54.3              | -67.6   | 30.8         | 74.3         |
| G25B_100_100_d | 55.0              | -51.4   | -8.9         | 52.2         |
| G50B_100_100_d | 53.1              | -30.0   | -43.1        | 52.5         |
| G75B_100_100_d | 46.1              | -13.3   | -49.4        | 51.1         |
| B00R_100_100_d | 32.5              | 16.9    | -44.6        | 47.7         |
| B25R_100_100_d | 37.2              | 43.1    | -30.8        | 53.0         |
| B50R_100_100_d | 48.1              | 65.4    | -12.7        | 66.6         |
| B75R_100_100_d | 47.8              | 58.9    | 10.4         | 59.9         |



%Gamma

$u^*_{rel} = 114$



%Regularità

$g^*_{H,rel} = 28$

$g^*_{C,rel} = 38$

**LRS18a; dati atti CIELAB (a)**

| name                | $L^*=L^*_a a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|---------------------|-------------------|---------|--------------|--------------|
| R <sub>d, Ma</sub>  | 47.5              | 57.2    | 37.8         | 68.6         |
| Y <sub>d, Ma</sub>  | 91.5              | -15.8   | 84.6         | 86.1         |
| G <sub>d, Ma</sub>  | 54.3              | -67.6   | 30.8         | 74.3         |
| C <sub>d, Ma</sub>  | 53.1              | -30.0   | -43.1        | 52.5         |
| B <sub>d, Ma</sub>  | 32.5              | 16.9    | -44.6        | 47.7         |
| M <sub>d, Ma</sub>  | 48.1              | 65.4    | -12.7        | 66.6         |
| N <sub>d, Ma</sub>  | 23.8              | 0.0     | 0.0          | 0.0          |
| W <sub>d, Ma</sub>  | 95.8              | 0.0     | 0.0          | 0.0          |
| R <sub>d, CIE</sub> | 39.9              | 58.7    | 27.9         | 65.0         |
| Y <sub>d, CIE</sub> | 81.2              | -2.8    | 71.5         | 71.6         |
| G <sub>d, CIE</sub> | 52.2              | -42.4   | 13.6         | 44.5         |
| B <sub>d, CIE</sub> | 30.5              | 1.4     | -46.4        | 46.4         |

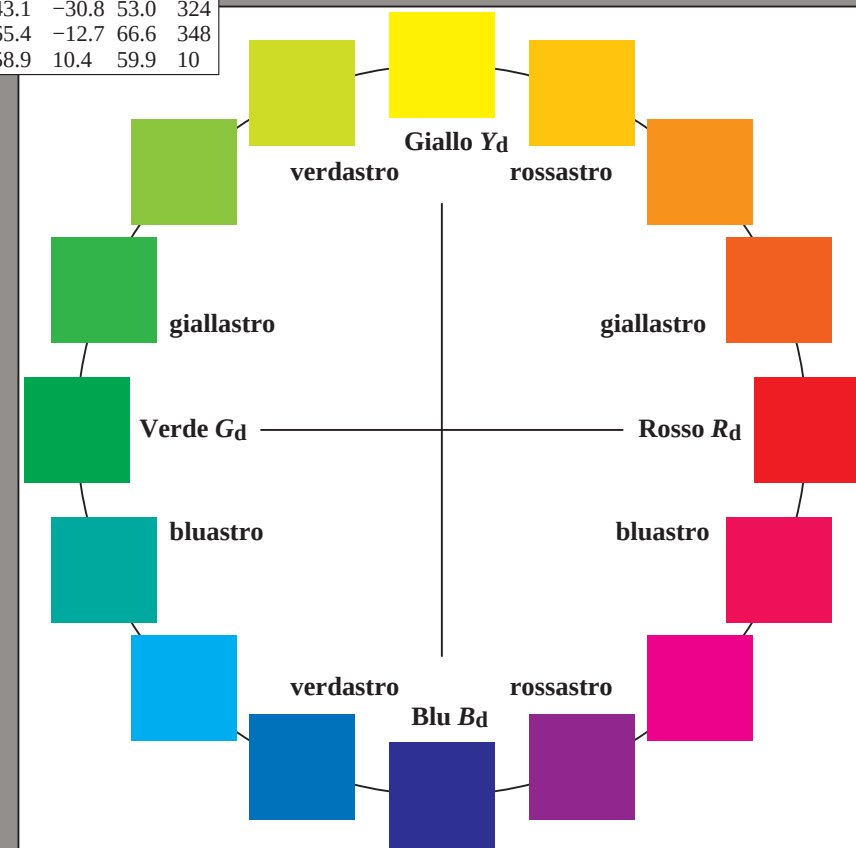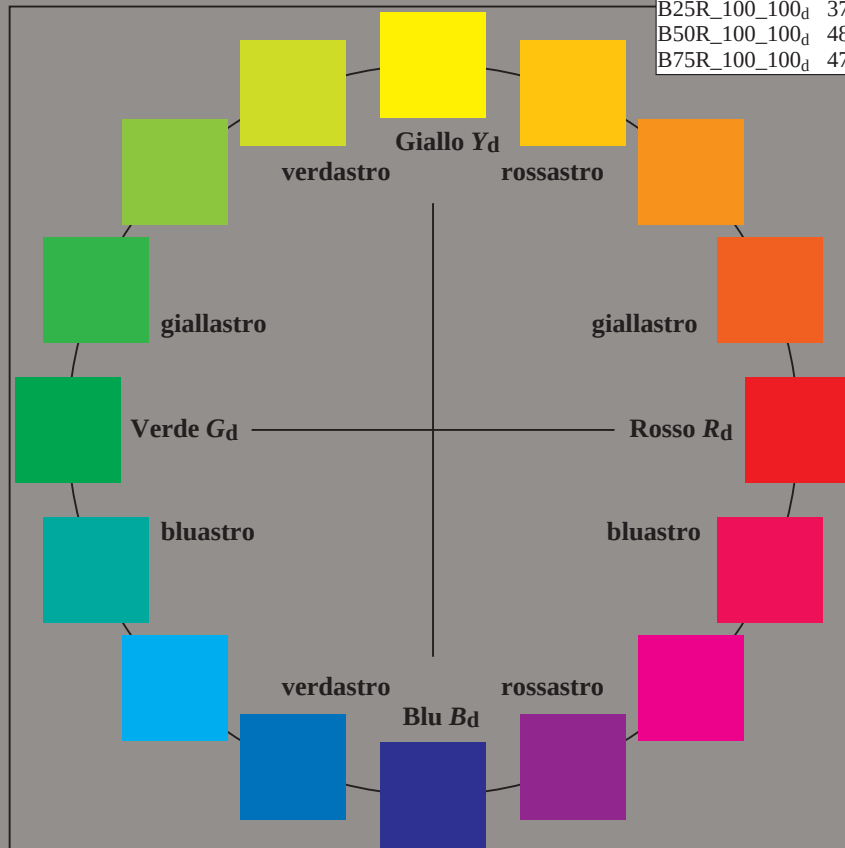

4-103130-L0 PI890-72

grafico TUB-PI89; cerchio delle tinte a 16 passi  
grafico conformemente a DIN 33872, 3D=1, de=0, cmyk\*

Input:  $rgb/cmyk \rightarrow rgb_{dd}$   
Output: 3D-linearizzazione a  $cmyk^*_{dd}$