

Ein- und Ausgabe: Fernseh-Lichtfarben-System sRGB (TLS00a)

Daten für jede Geräte- (d) oder
Elementarfarbe (e):


HIC_e^*

Buntontext für die Farben
dieser Seite:

$H_e^* = R00Y_e, R25Y_e, \dots, B75R_e$

sRGB (TLS00a); adaptierte CIELAB-Daten

H_e^*	$L^*=L_a^* a_a^*$	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
R00Y_100_100_e	50.9	78.3	37.3	86.7
R25Y_100_100_e	51.3	74.4	64.8	98.7
R50Y_100_100_e	63.1	42.7	70.8	82.7
R75Y_100_100_e	73.5	18.3	77.7	79.8
Y00G_100_100_e	83.7	-3.4	84.5	84.5
Y25G_100_100_e	91.0	-29.9	88.9	93.8
Y50G_100_100_e	85.9	-63.0	82.8	104.1
Y75G_100_100_e	84.1	-76.0	51.4	91.8
G00B_100_100_e	85.1	-64.6	20.7	67.9
G25B_100_100_e	86.5	-49.9	-8.4	50.6
G50B_100_100_e	79.0	-34.2	-25.7	42.8
G75B_100_100_e	70.0	-19.0	-39.6	43.9
B00R_100_100_e	59.2	1.7	-56.6	56.6
B25R_100_100_e	38.2	52.7	-90.7	104.9
B50R_100_100_e	57.1	94.1	-57.4	110.3
B75R_100_100_e	52.9	83.6	-11.6	84.4



%Umfang

$u_{rel}^* = 158$



%Regularität

$g_{H,rel}^* = 19$

$g_{C,rel}^* = 37$

sRGB (TLS00a); adaptierte CIELAB-Daten

Name	$L^*=L_a^* a_a^*$	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
$R_{e, Ma}$	50.9	78.3	37.3	86.7
$Y_{e, Ma}$	83.7	-3.4	84.5	84.5
$G_{e, Ma}$	85.1	-64.6	20.7	67.9
$C_{e, Ma}$	79.0	-34.2	-25.7	42.8
$B_{e, Ma}$	59.2	1.7	-56.6	56.6
$M_{e, Ma}$	57.1	94.1	-57.4	110.3
$N_{e, Ma}$	0.0	0.0	0.0	0
$W_{e, Ma}$	95.4	0.0	0.0	0
$R_{e, CIE}$	39.9	58.7	27.9	65.0
$Y_{e, CIE}$	81.2	-2.8	71.5	71.6
$G_{e, CIE}$	52.2	-42.4	13.6	44.5
$B_{e, CIE}$	30.5	1.4	-46.4	46.4

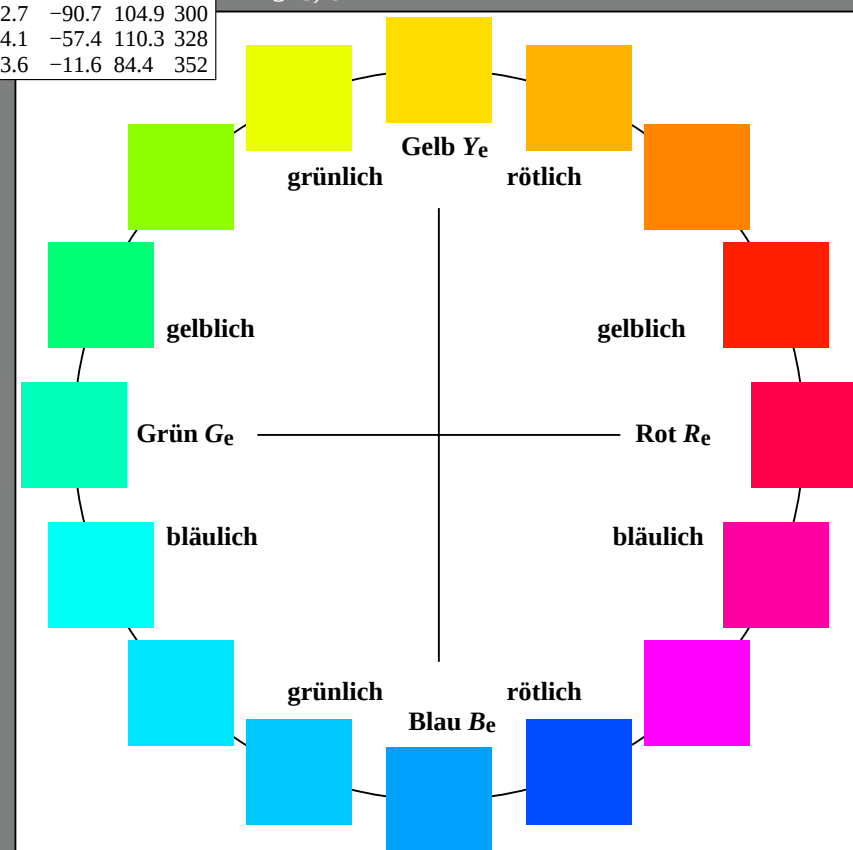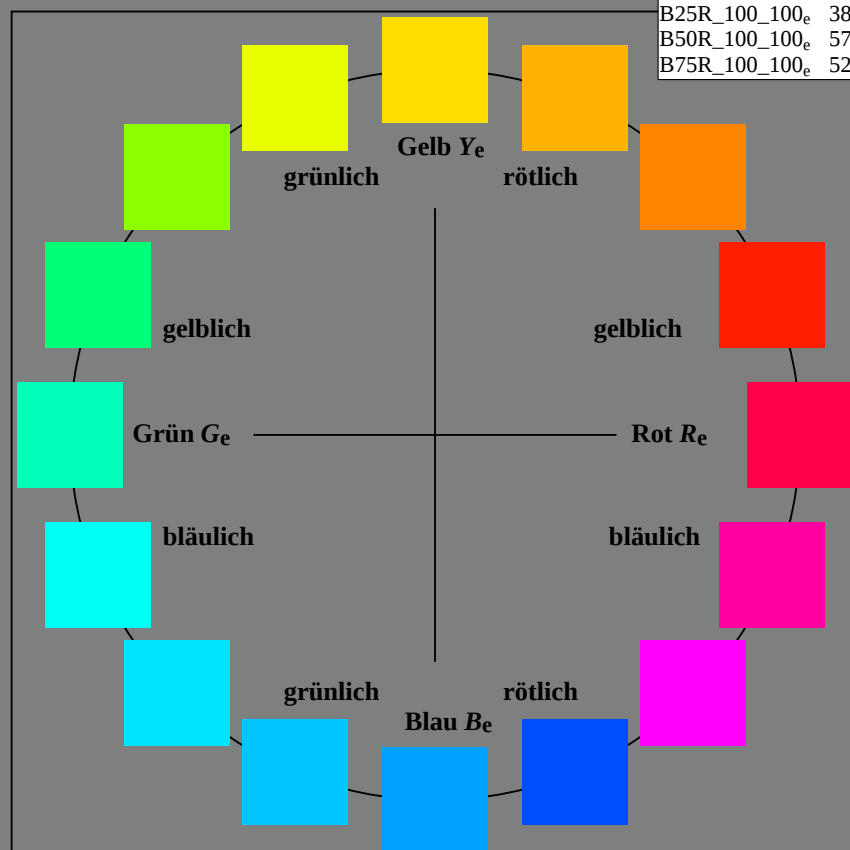

RG880-73 0-113134-L0

TUB-Prüfvorlage RG88; 16 Bunttöne, $cf=1$
Prüfvorlage nach DIN 33872, 3D=1, $de=1$, rgb^*

Eingabe: $rgb/cmyk \rightarrow rgb_{de}$
Ausgabe: 3D-Linearisierung rgb_{de}^*

0-113134-F0