
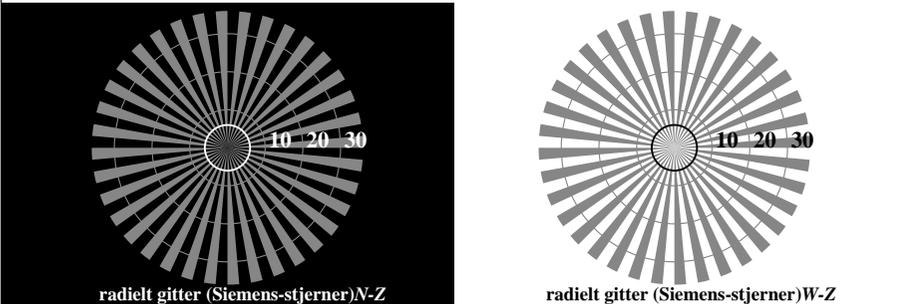


http://130.149.60.45/~farbmetrik/RN99/RN99L0NP.PDF /.PS; overføring output  
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 2/2


se lignende filer: http://130.149.60.45/~farbmetrik/RN99/RN99.HTM  
teknisk informasjon: http://www.ps.bam.de eller http://130.149.60.45/~farbmetrik

TUB registrering: 20150901-RN99/RN99L0NP.PDF /.PS  
anvendelse for måling av display output, ingen separasjon


TUB-material: code=rh4ta

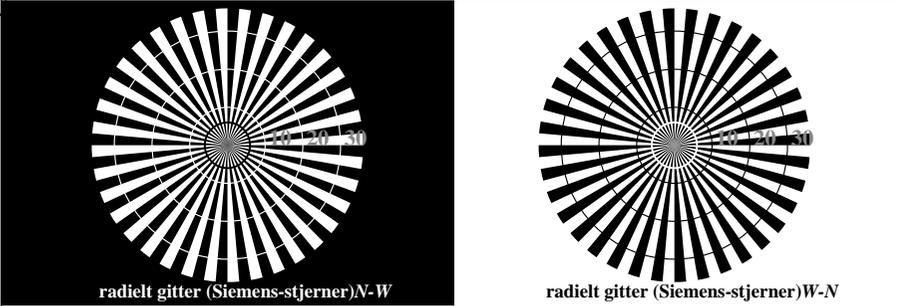

RN990-3, Figur A1We: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: w\* setgray

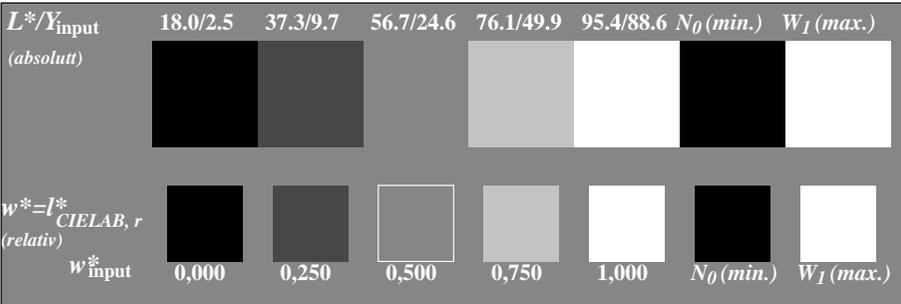


RN990-5, Figur A2We: Element B: 5 visuelle ekvidistante L\*-gråtrinn + N0 + W1; PS operator: w\* setgray

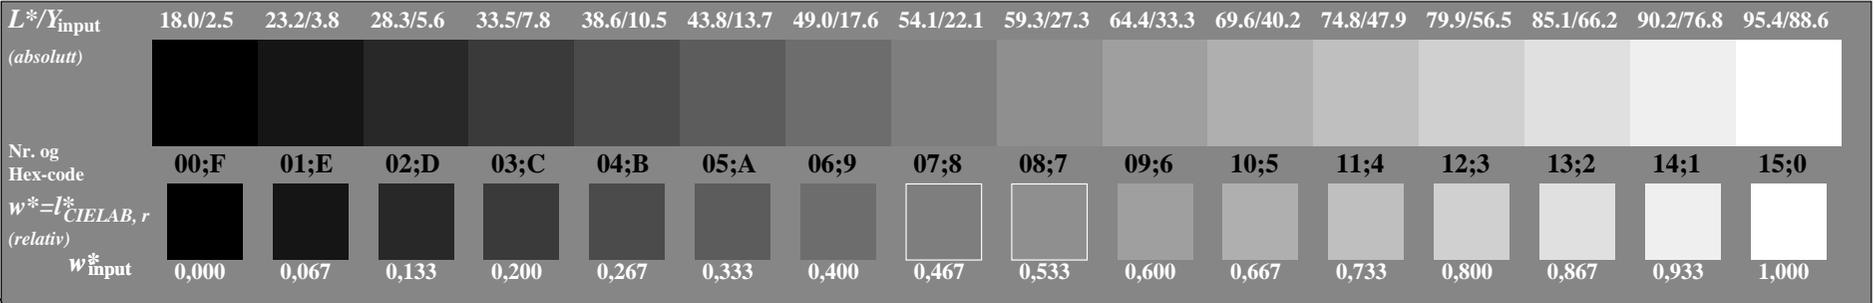


RN990-7, Figur A3We: Element C: 16 visuelle ekvidistante L\*-gråtrinn; PS operator: w\* setgray


prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: rgb/cmyk -> rgb\_e  
akromatisk prøveplansje N, 3D=0, de=1, sRGB output: overføring til rgb\_e

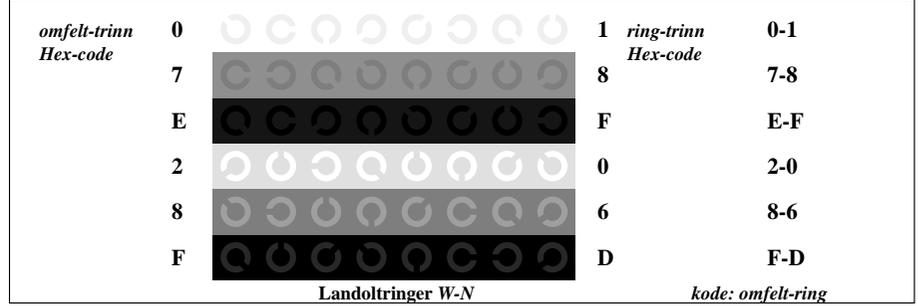

RN991-1, Figur A4We: Element D: Landoltringer W-N; PS operator: w\* setgray

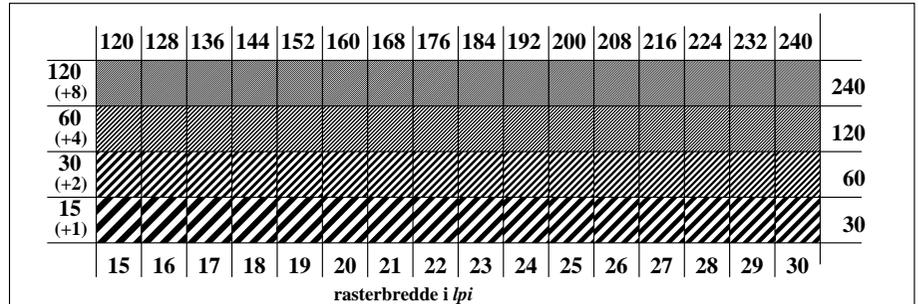

RN991-3, Figur A5We: Element E: Linjeraster med 45° (eller 135°); PS operator: w\* setgray

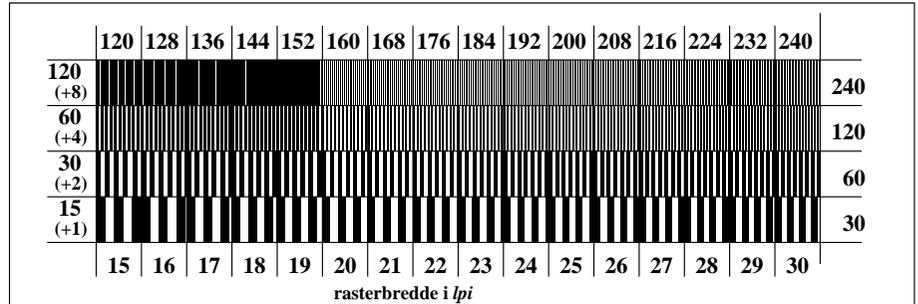

RN991-5, Figur A6We: Element F: Linjeraster med 90° (eller 0°); PS operator: w\* setgray

