RN990-3, Figur A1W:- Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$

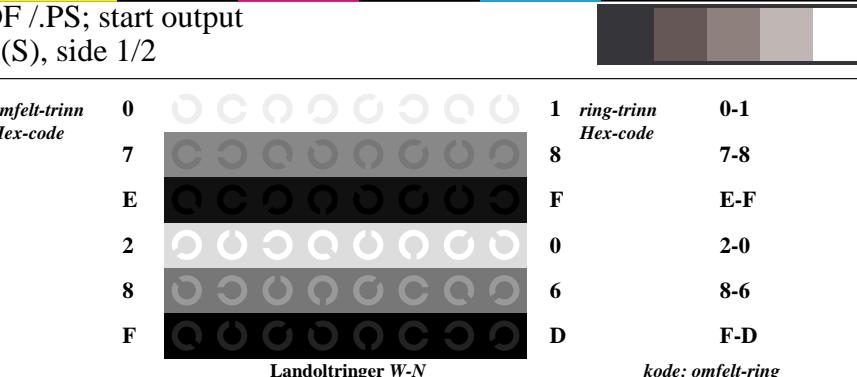
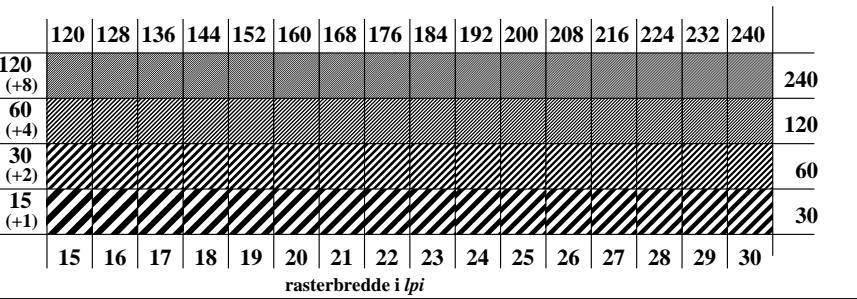
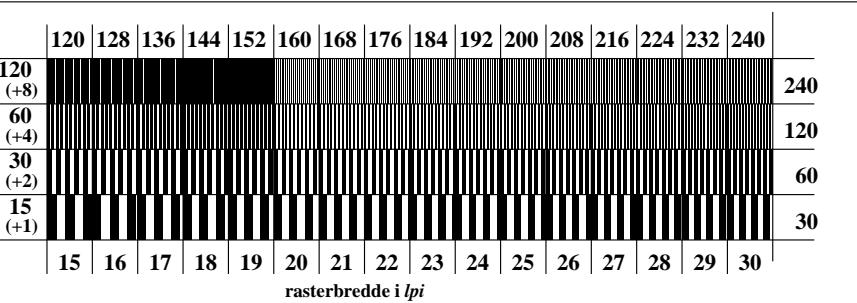

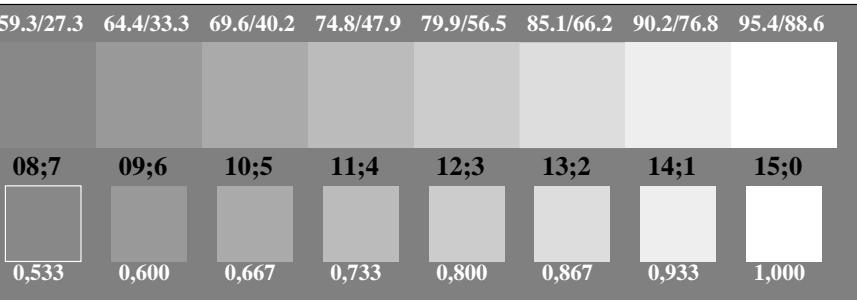
| L^*/Y_{input} (absolutt) | 18.0/2.5 | 37.3/9.7 | 56.7/24.6 | 76.1/49.9 | 95.4/88.6 | N_0 (min.) | W_I (max.) |
|--------------------------------------|----------|-------------|-----------|--------------|-----------|--------------|--------------|
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [dark gray] | [white] | [light gray] | [black] | [white] | [white] |
| w^*_{input} | 0,000 | 0,250 | 0,500 | 0,750 | 1,000 | N_0 (min.) | W_I (max.) |

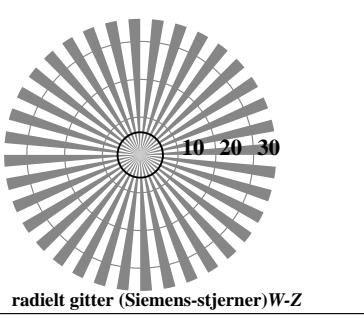
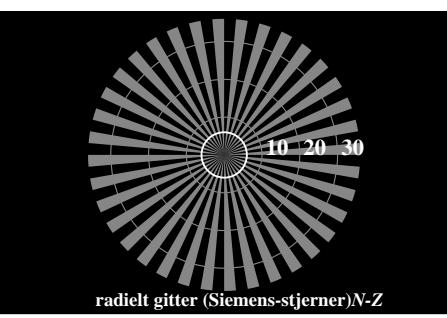
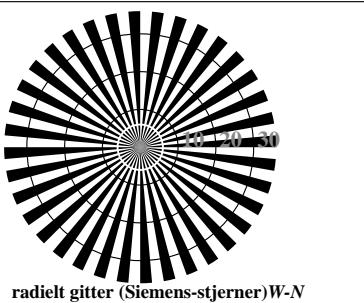

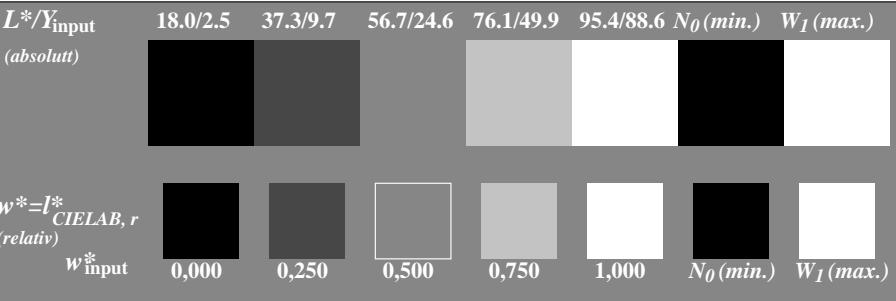
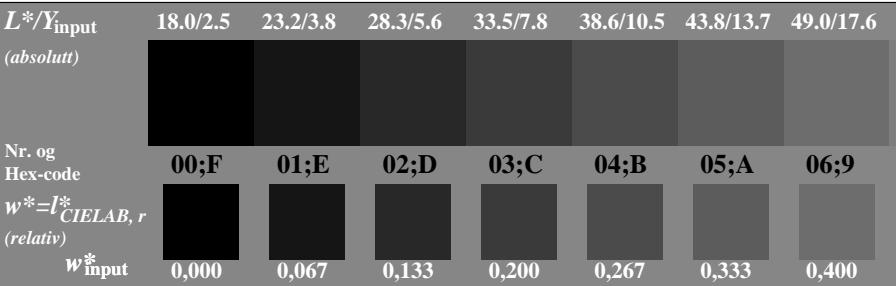
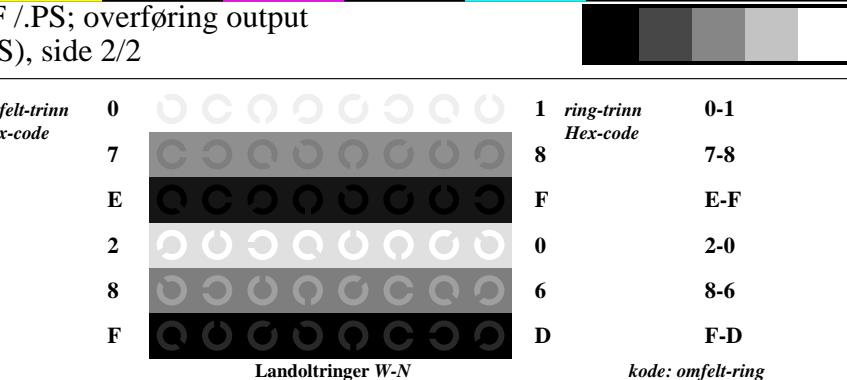

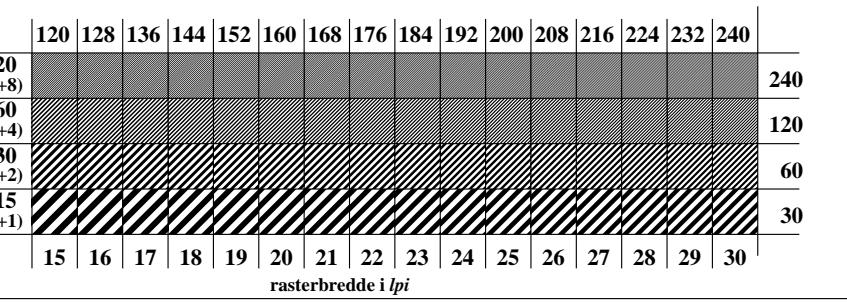
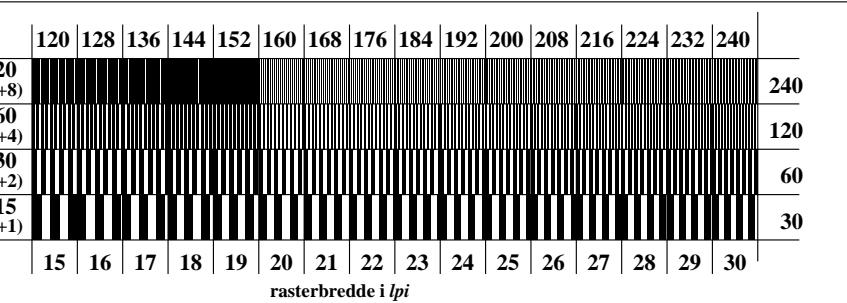
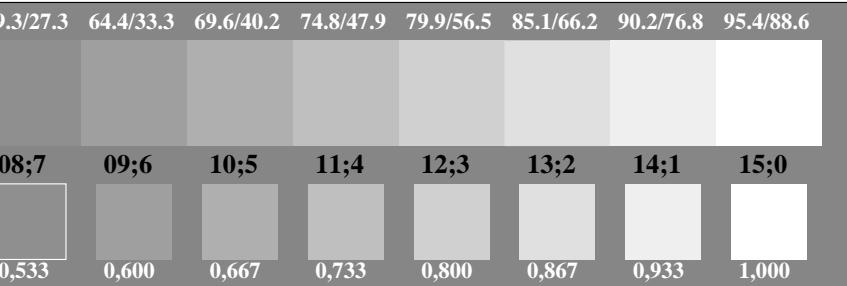
RN990-5, Figur A2W:- Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$

| L^*/Y_{input} (absolutt) | 18.0/2.5 | 23.2/3.8 | 28.3/5.6 | 33.5/7.8 | 38.6/10.5 | 43.8/13.7 | 49.0/17.6 | 54.1/22.1 | 59.3/27.3 | 64.4/33.3 | 69.6/40.2 | 74.8/47.9 | 79.9/56.5 | 85.1/66.2 | 90.2/76.8 | 95.4/88.6 |
|--------------------------------------|----------|-------------|----------|--------------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Nr. og Hex-code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [dark gray] | [white] | [light gray] | [black] | [dark gray] | [white] |
| w^*_{input} | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |

RN990-7, Figur A3W:- Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$


prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgb/cmyk$
akromatisk prøveplansje N output: ingen endring

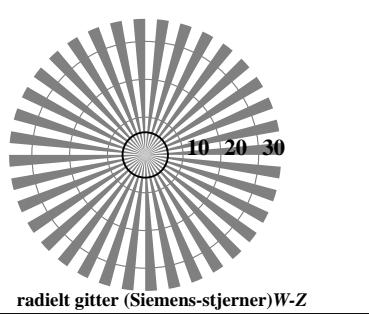
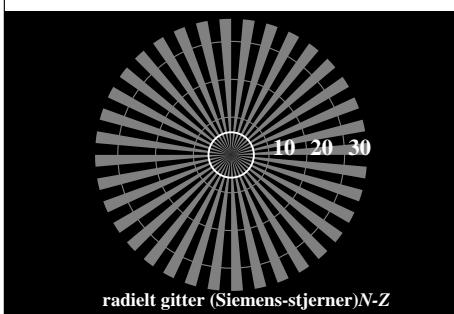
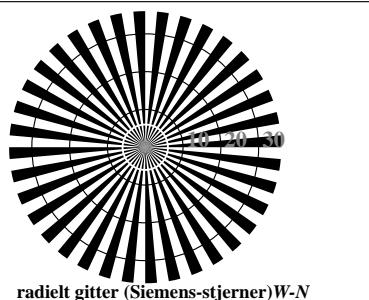

RN991-1, Figur A4W:- Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5W:- Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6W:- Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 

RN990-3, Figur A1Wd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$ RN990-5, Figur A2Wd: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$ RN990-7, Figur A3Wd: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$ RN991-1, Figur A4Wd: Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5Wd: Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6Wd: Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 

prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgbd$
 akromatisk prøveplansje N, 3D=0, de=0, sRGB

output: overføring til $rgbd$



RN990-3, Figur A1W:- Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$

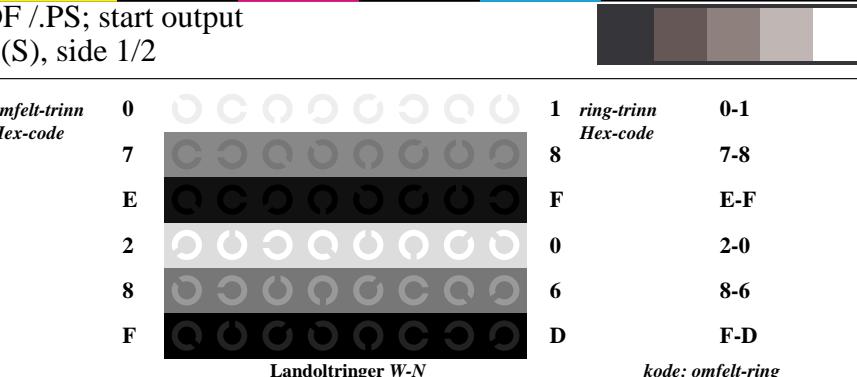
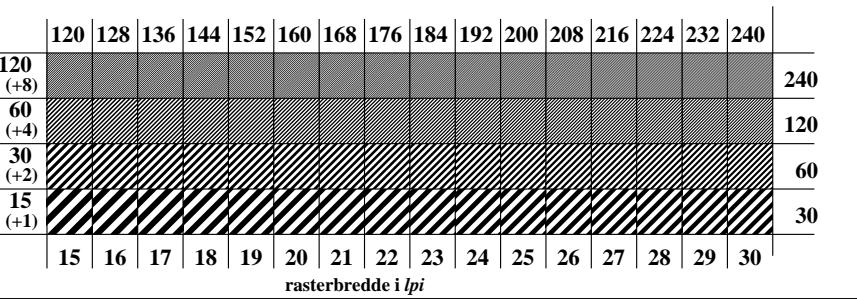
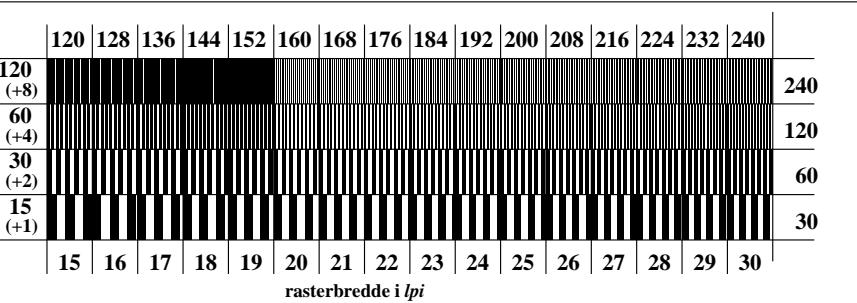

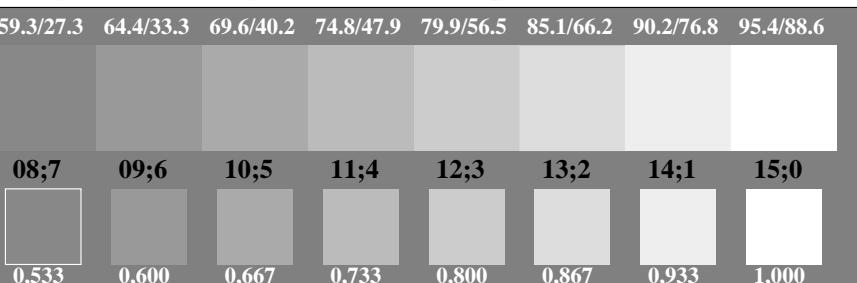
| L^*/Y_{input} (absolutt) | 18.0/2.5 | 37.3/9.7 | 56.7/24.6 | 76.1/49.9 | 95.4/88.6 | N_0 (min.) | W_I (max.) |
|--------------------------------------|----------|-------------|-----------|--------------|-----------|--------------|--------------|
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [dark gray] | [white] | [light gray] | [black] | [white] | [white] |
| w^*_{input} | 0,000 | 0,250 | 0,500 | 0,750 | 1,000 | N_0 (min.) | W_I (max.) |

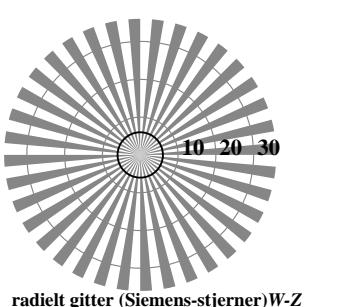
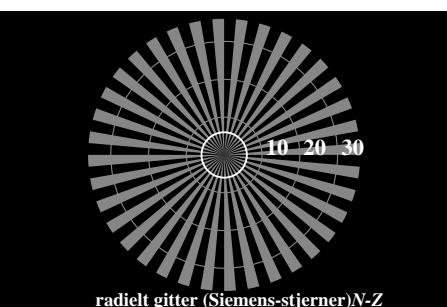
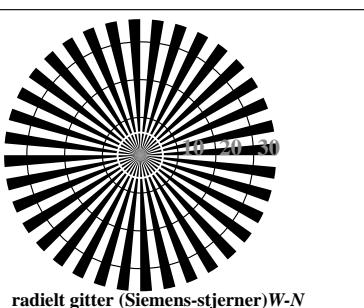
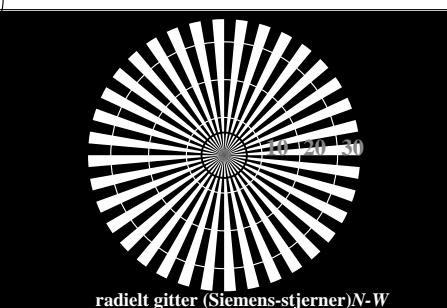

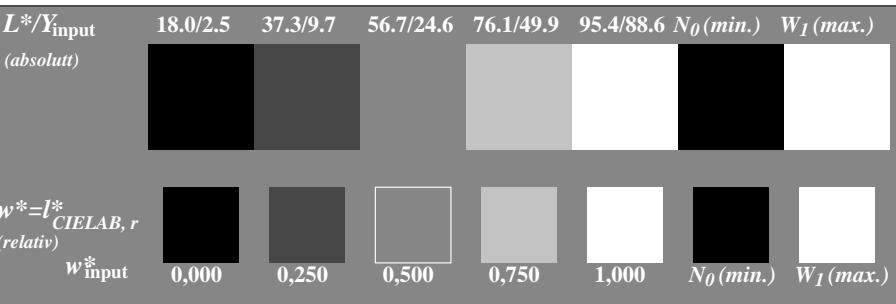
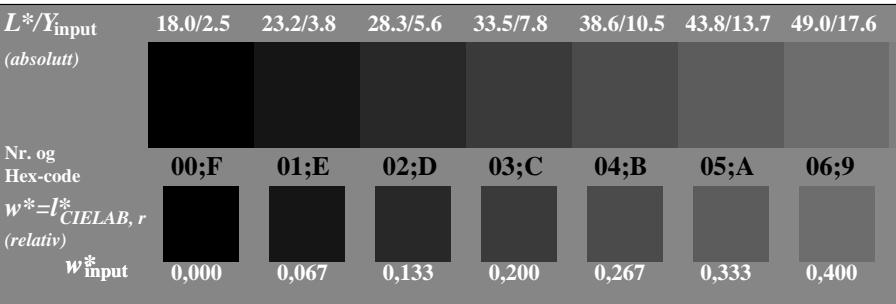
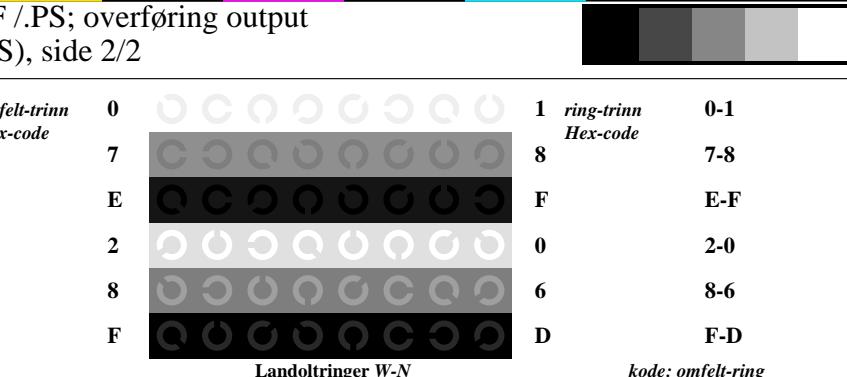

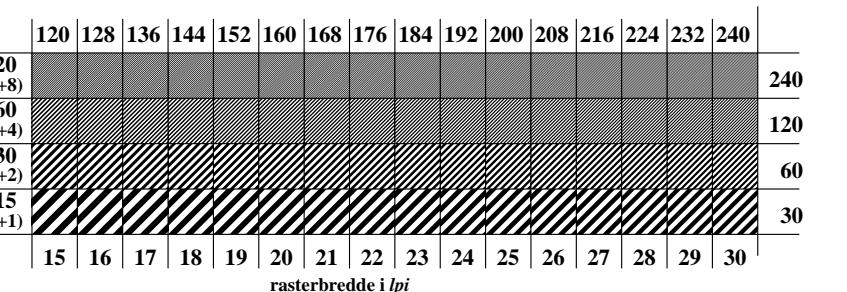
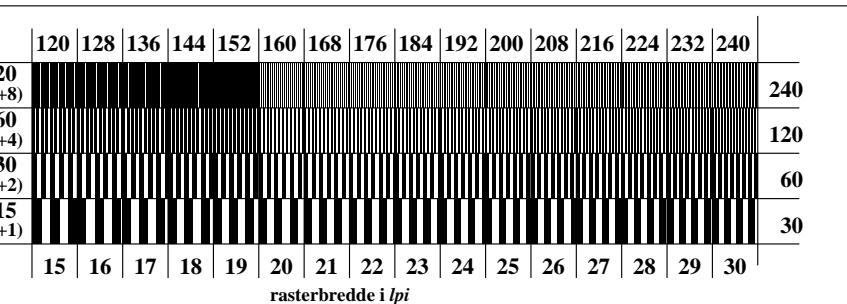
RN990-5, Figur A2W:- Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$

| L^*/Y_{input} (absolutt) | 18.0/2.5 | 23.2/3.8 | 28.3/5.6 | 33.5/7.8 | 38.6/10.5 | 43.8/13.7 | 49.0/17.6 | 54.1/22.1 | 59.3/27.3 | 64.4/33.3 | 69.6/40.2 | 74.8/47.9 | 79.9/56.5 | 85.1/66.2 | 90.2/76.8 | 95.4/88.6 |
|--------------------------------------|----------|-------------|----------|--------------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Nr. og Hex-code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [dark gray] | [white] | [light gray] | [black] | [dark gray] | [white] |
| w^*_{input} | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |

RN990-7, Figur A3W:- Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$

prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgb/cmyk$
akromatisk prøveplansje N output: ingen endring

RN991-1, Figur A4W:- Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5W:- Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6W:- Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 

RN990-3, Figur A1We: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$ RN990-5, Figur A2We: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$ RN990-7, Figur A3We: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$ RN991-1, Figur A4We: Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5We: Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6We: Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 