



http://130.149.60.45/~farbmetrik/RE98/RE98L0FP.PDF /.PS; 3D-linearisering

F: 3D-linearisering RE98/RE98LJ30FP.DAT i fil (F), side 2/2


se lignende filer: <http://130.149.60.45/~farbmetrik/RE98/RE98L0FP.PDF> / .PS
teknisk informasjon: <http://www.ps.bam.de> eller <http://130.149.60.45/~farbmetrik>

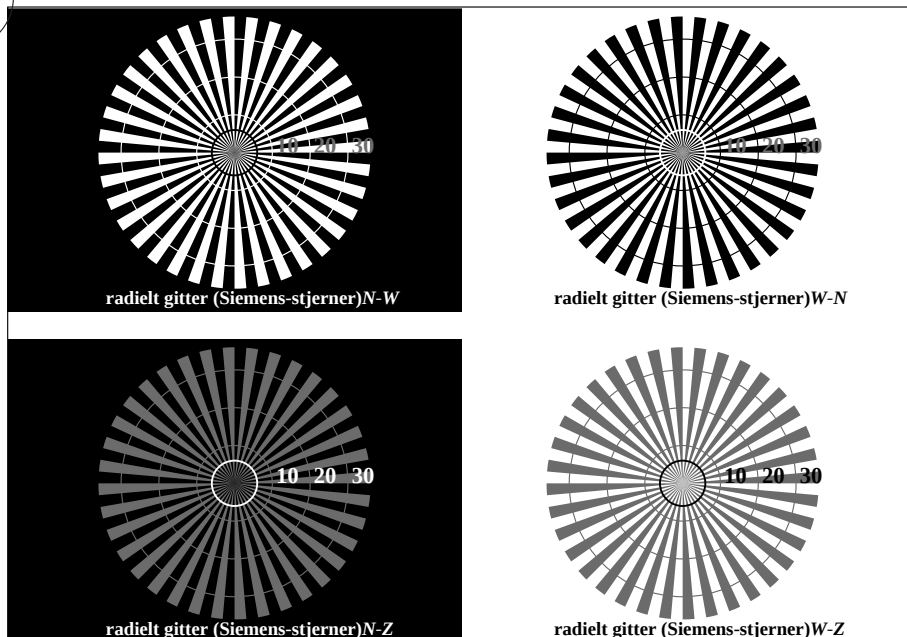

RE980-3, Figur A1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: w* setgray

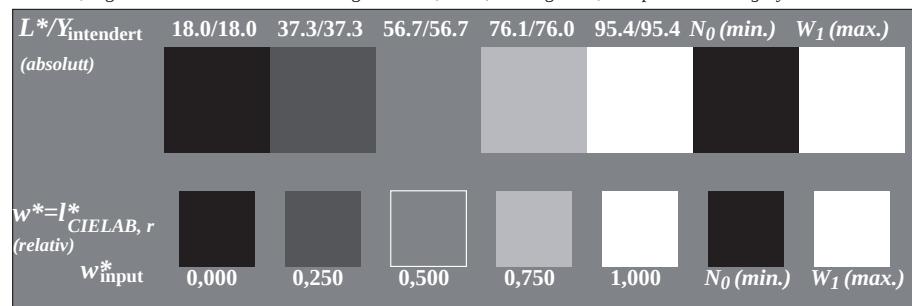

RE980-5, Figur A2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: w* setgray

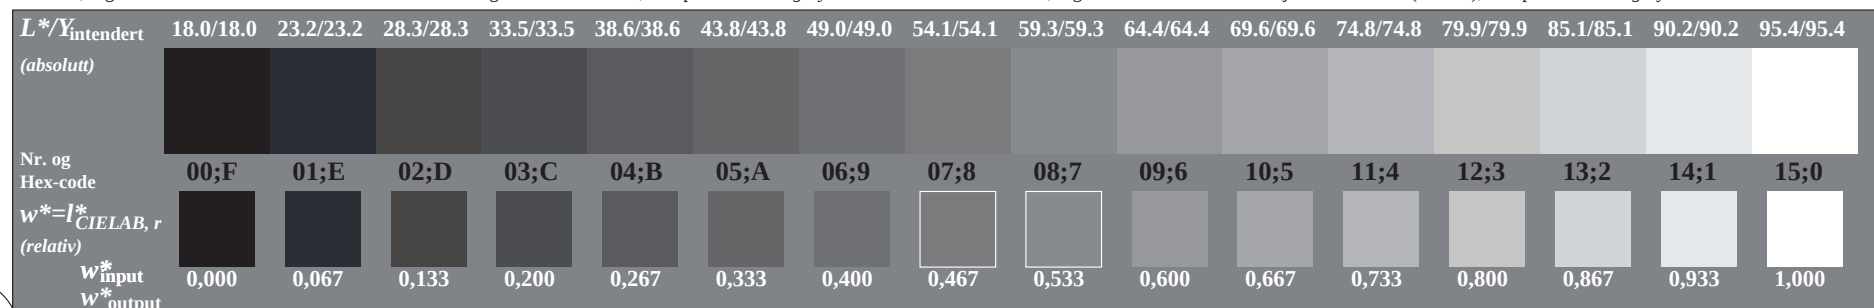


RE980-7, Figur A3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: w* setgray




omfelt-trinn Hex-code	0	7	E	2	8	F
ring-trinn Hex-code	1	8	F	0	6	D
	0-1	7-8	E-F	2-0	8-6	F-D
Landoltringer W-N						kode: omfelt-ring

RE981-1, Figur A4Wde: Element D: Landoltringer W-N; PS operator: w* setgray

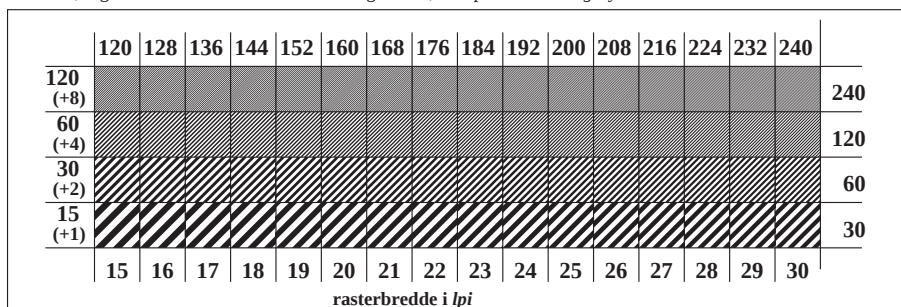

RE981-3, Figur A5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: w* setgray

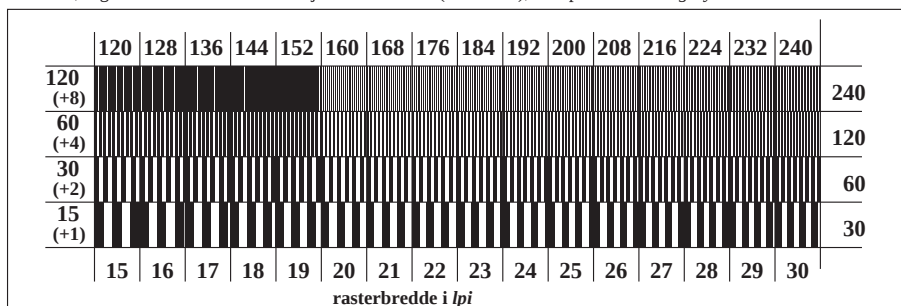

RE981-5, Figur A6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: w* setgray

TUB registrering: 20150901-RE98/RE98L0FP.PDF /.PS
anvendelse for måling av offsettrykk output, separasjon cmyk* (CMYK)

TUB-material: code=rh4ta