





Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour D65, $Y_w=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	$X_{88.6}$	$Y_{88.6}$	$Z_{88.6}$	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0 405	32 561	28.85	51.56	95.79	0.1637	0.2926	0.5436	193.7	16 483	37 589	Cm
6 435	32 562	25.77	52.08	78.6	0.1647	0.3328	0.5023	178.4	17 486	42 610	
10 450	32 563	20.31	52.64	46.4	0.1702	0.441	0.3887	141.8	19 496	-1 496c	
12 460	33 565	18.49	53.43	30.14	0.1812	0.5234	0.2952	124.0	21 505	-1 505c	
12 465	33 567	19.45	54.62	30.14	0.1866	0.5241	0.2892	122.8	21 506	-1 506c	
14 470	33 569	19.02	55.56	17.7	0.206	0.602	0.1918	111.3	24 520	-1 520c	
15 475	34 573	21.05	57.84	13.21	0.2285	0.6279	0.1434	105.6	25 528	-1 528c	Gm
16 480	36 580	25.69	61.97	9.79	0.2636	0.6358	0.1005	99.0	27 537	-1 537c	
17 485	39 595	37.3	69.76	7.29	0.3261	0.6099	0.0638	87.2	29 548	-1 548c	
18 490	-1 490c	68.29	83.1	5.43	0.4354	0.5298	0.0346	58.5	33 565	11 459	max
19 495	-1 495c	68.25	81.77	4.0	0.4431	0.5308	0.026	57.1	33 566	12 462	
20 500	-1 500c	68.23	80.1	2.89	0.4511	0.5296	0.0191	55.3	33 567	12 464	
22 510	-1 510c	68.12	75.54	1.45	0.4694	0.5205	0.01	50.7	33 569	13 469	
23 520	-1 519c	67.91	72.63	1.03	0.4797	0.513	0.0072	47.7	34 570	14 471	Ym
25 530	-1 529c	66.91	65.59	0.51	0.503	0.4931	0.0038	40.7	34 573	15 475	
27 540	-1 539c	64.9	57.49	0.23	0.5292	0.4688	0.0019	32.8	35 577	15 478	
28 545	-1 544c	63.48	53.27	0.16	0.5429	0.4556	0.0014	28.7	35 579	15 479	
29 550	-1 549c	61.75	48.96	0.11	0.5571	0.4417	0.001	24.7	36 582	16 480	
30 555	-1 554c	59.71	44.65	0.08	0.5716	0.4274	0.0008	20.8	36 584	16 481	
32 560	-1 560c	54.73	36.33	0.05	0.6007	0.3987	0.0005	13.6	37 589	16 483	
32 561	0 405	66.18	48.43	13.1	0.5182	0.3792	0.1025	13.7	37 589	16 483	Rm
32 562	6 435	69.27	47.91	30.28	0.4697	0.3249	0.2053	358.4	42 610	17 486	
32 563	10 450	74.73	47.35	62.49	0.4048	0.2565	0.3385	321.8	-1 496c	19 496	
33 565	12 460	76.54	46.56	78.74	0.3792	0.2306	0.3901	304.1	-1 505c	21 505	
33 567	12 465	75.59	45.37	78.74	0.3785	0.2271	0.3942	302.9	-1 506c	21 506	
33 569	14 470	76.02	44.43	91.18	0.3592	0.2099	0.4308	291.3	-1 520c	24 520	
34 573	15 475	73.98	42.15	95.67	0.3492	0.199	0.4516	285.7	-1 528c	25 528	Mm
36 580	16 480	69.34	38.02	99.09	0.3358	0.1841	0.4799	279.1	-1 537c	27 537	
39 595	17 485	57.73	30.23	101.59	0.3045	0.1594	0.5359	267.2	-1 548c	29 548	
-1 490c	18 490	26.74	16.89	103.45	0.1818	0.1148	0.7032	238.5	11 459	33 565	min
-1 495c	19 495	26.79	18.22	104.88	0.1787	0.1215	0.6996	237.1	12 462	33 566	
-1 500c	20 500	26.81	19.89	105.99	0.1755	0.1302	0.6941	235.4	12 464	33 567	
-1 510c	22 510	26.92	24.45	107.43	0.1695	0.1539	0.6765	230.7	13 469	33 569	
-1 519c	23 520	27.12	27.36	107.85	0.167	0.1685	0.6643	227.7	14 471	34 570	Bm
-1 529c	25 530	28.12	34.4	108.38	0.1645	0.2012	0.6341	220.7	15 475	34 573	
-1 539c	27 540	30.13	42.5	108.65	0.1662	0.2344	0.5993	212.8	15 478	35 577	
-1 544c	28 545	31.55	46.72	108.72	0.1687	0.2498	0.5813	208.8	15 479	35 579	
-1 549c	29 550	33.29	51.03	108.77	0.1723	0.2643	0.5632	204.7	16 480	36 582	
-1 554c	30 555	35.32	55.34	108.8	0.1771	0.2774	0.5454	200.8	16 481	36 584	
-1 560c	32 560	40.31	63.66	108.84	0.1894	0.2991	0.5114	193.6	16 483	37 589	
380	770	84.19	88.59	96.46	0.3127	0.329	0.3582	0.0			

3-000030-L0

TF230-7N_1





TUB-test graphique TF23; maximum C_{AB} , $Y_m=520_770$
XYZ, xyz, h data, D65, $Y_w=88,6$, Parameter: Name

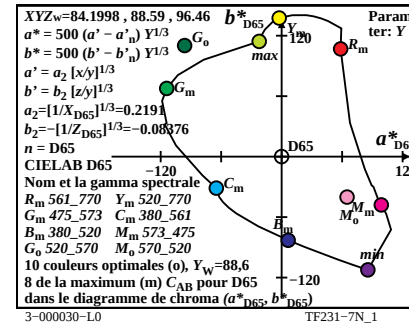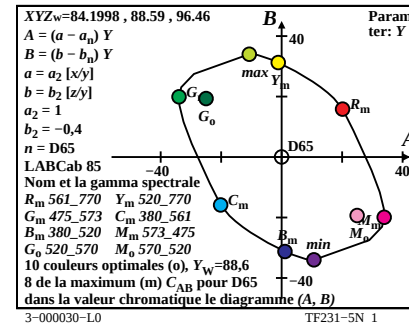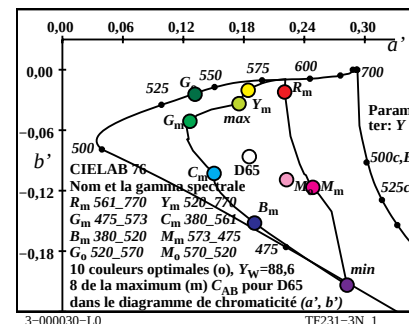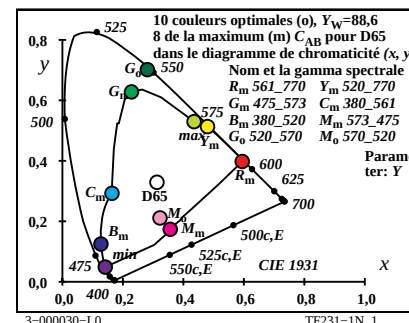

3-000030-L0

TF231-7N_1

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement





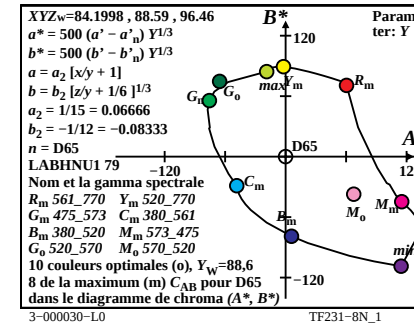
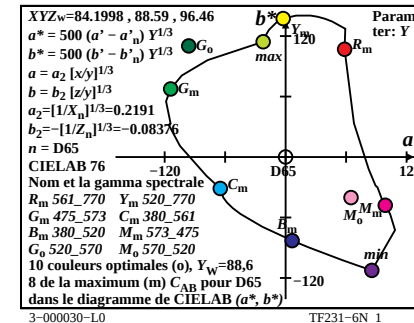
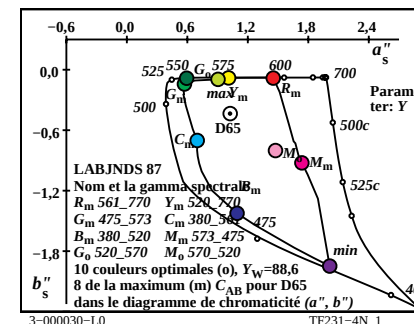
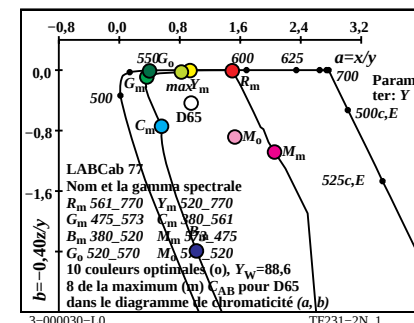


3-000030-L0

TF231-8N_1

Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour D50, Y_w=88,6, Y_m=520_770

i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code
1 405	32 564	26.24	51.21	72.29	0.1752	0.3419	0.4827	185.5	17 486	38 592	Cm
7 435	33 565	23.33	51.54	56.25	0.1779	0.393	0.4289	168.3	18 490	46 634	
10 450	33 566	20.4	51.98	37.62	0.1854	0.4725	0.342	144.5	19 497	-1 497c	
12 460	33 567	19.02	52.53	25.04	0.1969	0.5437	0.2592	128.7	21 506	-1 506c	
13 465	33 568	18.88	53.11	19.63	0.206	0.5796	0.2143	122.2	22 511	-1 511c	
14 470	34 570	19.36	54.07	15.11	0.2187	0.6106	0.1706	116.7	23 519	-1 519c	Gm
15 475	34 573	20.87	55.72	11.43	0.237	0.6329	0.1299	111.5	25 527	-1 527c	Gm
15 480	35 578	24.45	59.28	11.44	0.2569	0.6227	0.1202	108.5	26 531	-1 531c	
17 485	37 587	31.29	64.0	6.49	0.3074	0.6287	0.0637	98.0	28 544	-1 544c	
18 490	44 620	58.12	77.97	4.9	0.4122	0.5529	0.0348	71.0	32 561	-1 561c	max
19 495	-1 495c	73.62	82.96	3.66	0.4594	0.5177	0.0228	54.4	33 568	12 463	
20 500	-1 500c	73.61	81.49	2.68	0.4665	0.5164	0.0169	52.5	33 569	13 466	
22 510	-1 510c	73.51	77.37	1.37	0.4827	0.5081	0.009	47.4	34 571	14 471	
23 520	-1 519c	73.32	74.67	0.99	0.4921	0.5012	0.0066	44.2	34 572	14 473	Ym
25 530	-1 529c	72.37	68.03	0.49	0.5136	0.4828	0.0035	36.4	35 575	15 477	
27 540	-1 539c	70.43	60.24	0.23	0.538	0.4601	0.0018	27.8	35 579	16 480	
28 545	-1 544c	69.05	56.11	0.16	0.5509	0.4477	0.0013	23.4	36 581	16 481	
29 550	-1 549c	67.34	51.87	0.11	0.5643	0.4346	0.0009	19.1	36 583	16 483	
30 555	-1 554c	65.31	47.59	0.08	0.578	0.4211	0.0007	15.0	37 585	16 484	
32 560	-1 560c	60.3	39.22	0.05	0.6055	0.3938	0.0005	7.7	38 590	17 486	
32 564	1 405	70.17	48.78	10.19	0.5433	0.3776	0.0789	5.5	38 592	17 486	Rm
33 565	7 435	73.09	48.45	26.24	0.4945	0.3278	0.1775	348.3	46 634	18 490	
33 566	10 450	76.01	48.01	44.87	0.45	0.2842	0.2656	324.5	-1 497c	19 497	
33 567	12 460	77.39	47.46	57.44	0.4245	0.2603	0.3151	308.8	-1 506c	21 506	
33 568	13 465	77.53	46.88	62.85	0.414	0.2503	0.3356	302.3	-1 511c	22 511	
34 570	14 470	77.05	45.92	67.38	0.4047	0.2412	0.3539	296.7	-1 519c	23 519	
34 573	15 475	75.55	44.27	71.05	0.3957	0.2319	0.3722	291.6	-1 527c	25 527	Mm
35 578	15 480	71.96	40.71	71.05	0.3916	0.2216	0.3867	288.5	-1 531c	26 531	
37 587	17 485	65.12	35.99	76.0	0.3676	0.2032	0.429	278.0	-1 544c	28 544	
44 620	18 490	38.29	22.02	77.58	0.2777	0.1596	0.5626	251.1	-1 561c	32 561	min
-1 495c	19 495	22.79	17.03	78.83	0.192	0.1435	0.6643	234.4	12 463	33 568	
-1 500c	20 500	22.8	18.5	79.81	0.1882	0.1528	0.6589	232.5	13 466	33 569	
-1 510c	22 510	22.91	22.62	81.11	0.1808	0.1786	0.6404	227.5	14 471	34 571	
-1 519c	23 520	23.09	25.32	81.5	0.1777	0.1948	0.6273	224.2	14 473	34 572	Bm
-1 529c	25 530	24.04	31.96	81.99	0.1742	0.2315	0.5941	216.5	15 477	35 575	
-1 539c	27 540	25.98	39.75	82.25	0.1755	0.2686	0.5558	207.8	16 480	35 579	
-1 544c	28 545	27.37	43.88	82.33	0.1782	0.2857	0.536	203.5	16 481	36 581	
-1 549c	29 550	29.07	48.12	82.37	0.1821	0.3015	0.5162	199.2	16 483	36 583	
-1 554c	30 555	31.1	52.4	82.4	0.1874	0.3158	0.4966	195.0	16 484	37 585	
-1 560c	32 560	36.11	60.77	82.44	0.2013	0.3388	0.4597	187.7	17 486	38 590	
380	770	85.42	88.59	73.08	0.3457	0.3585	0.2957	0.0			

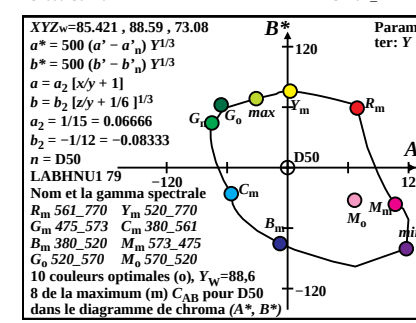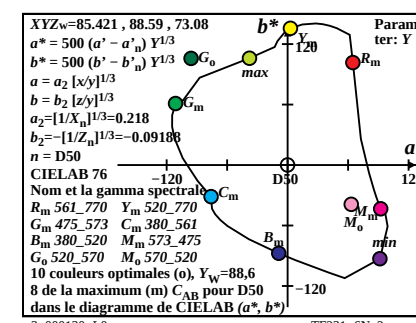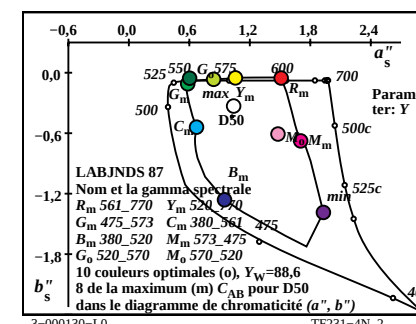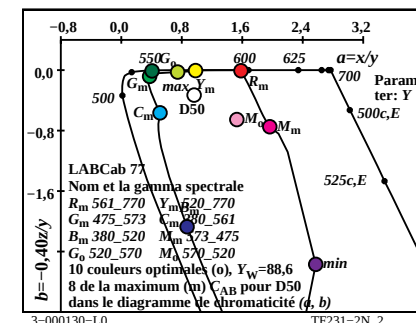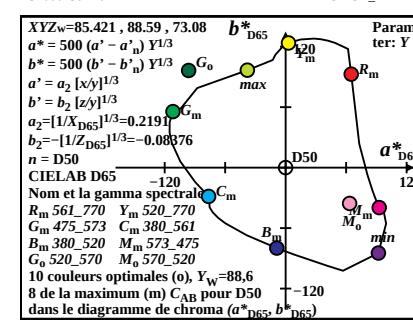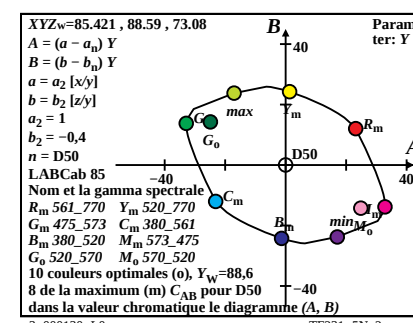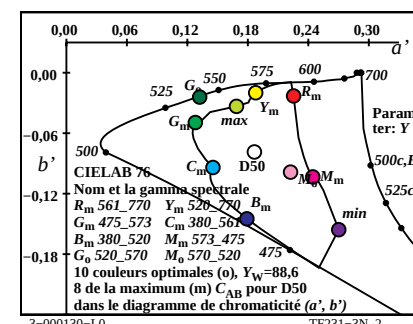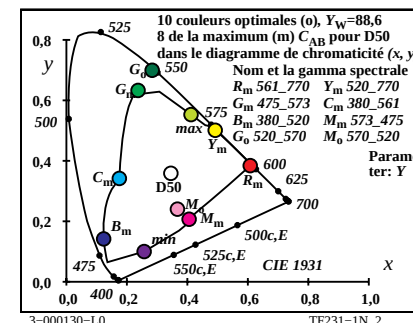


Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour P40, $Y_w=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	$X_{88,6}$	$Y_{88,6}$	$Z_{88,6}$	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0	405	33	568	25.48	50.12	56.92	0.1922	0.3782	0.4295	179.4	17 488 38 594 Cm
7	435	33	568	22.92	50.37	42.95	0.1971	0.4333	0.3695	162.7	18 493 54 674
10	450	33	569	20.81	50.74	29.3	0.2063	0.5031	0.2905	143.8	19 499 -1 499c
12	460	34	570	19.89	51.2	20.08	0.2181	0.5615	0.2202	131.1	21 507 -1 507c
13	465	34	571	19.88	51.65	15.98	0.2271	0.5902	0.1825	125.5	22 512 -1 512c
14	470	34	572	20.36	52.42	12.49	0.2387	0.6147	0.1464	120.6	23 519 -1 519c
14	475	34	574	21.95	54.15	12.49	0.2477	0.6111	0.141	119.3	24 522 -1 522c Gm
15	480	35	578	24.49	56.54	9.64	0.2701	0.6234	0.1063	113.9	26 531 -1 531c
17	485	37	585	29.72	60.26	5.64	0.3108	0.6301	0.059	105.2	28 543 -1 543c
17	490	40	600	44.57	70.01	5.65	0.3707	0.5822	0.047	92.5	30 554 -1 554c max
19	495	-1	495c	80.24	84.05	3.24	0.4789	0.5016	0.0193	51.6	34 571 12 464
20	500	-1	500c	80.23	82.78	2.4	0.485	0.5004	0.0145	49.6	34 571 13 467
21	510	-1	509c	80.21	81.16	1.75	0.4916	0.4975	0.0107	47.2	34 572 13 469
24	520	-1	520c	79.64	73.89	0.66	0.5164	0.4792	0.0042	36.9	35 575 15 476 Ym
26	530	-1	530c	78.35	67.28	0.33	0.5368	0.4609	0.0022	28.2	35 578 16 480
27	540	-1	539c	77.33	63.58	0.23	0.5478	0.4504	0.0016	23.7	36 580 16 481
29	545	-1	545c	74.41	55.69	0.12	0.5714	0.4276	0.0009	14.9	36 584 16 484
29	550	-1	549c	74.41	55.69	0.12	0.5714	0.4276	0.0009	14.9	36 584 16 484
31	555	-1	555c	70.15	47.4	0.07	0.5963	0.403	0.0006	6.9	37 588 17 486
32	560	-1	560c	67.45	43.22	0.05	0.6091	0.3903	0.0005	3.4	38 591 17 487
33	568	0	405	75.45	49.87	7.76	0.5669	0.3747	0.0583	359.4	38 594 17 488 Rm
33	568	7	435	78.01	49.62	21.73	0.5222	0.3322	0.1454	342.7	54 674 18 493
33	569	10	450	80.12	49.25	35.38	0.4862	0.2989	0.2147	323.9	-1 499c 19 499
34	570	12	460	81.04	48.79	44.6	0.4645	0.2797	0.2557	311.1	-1 507c 21 507
34	571	13	465	81.04	48.34	48.7	0.455	0.2714	0.2734	305.5	-1 512c 22 512
34	572	14	470	80.56	47.57	52.19	0.4467	0.2638	0.2894	300.6	-1 519c 23 519
34	574	14	475	78.97	45.84	52.19	0.4461	0.259	0.2948	299.4	-1 522c 24 522 Mm
35	578	15	480	76.43	43.45	55.04	0.4369	0.2484	0.3146	294.0	-1 531c 26 531
37	585	17	485	71.2	39.73	59.04	0.4188	0.2337	0.3473	285.2	-1 543c 28 543
40	600	17	490	56.35	29.98	59.03	0.3876	0.2062	0.406	272.6	-1 554c 30 554 min
-1	495c	19	495	20.68	15.94	61.44	0.2109	0.1625	0.6264	231.6	12 464 34 571
-1	500c	20	500	20.69	17.21	62.28	0.2065	0.1718	0.6215	229.7	13 467 34 571
-1	509c	21	510	20.72	18.83	62.93	0.2021	0.1837	0.614	227.3	13 469 34 572
-1	520c	24	520	21.28	26.1	64.02	0.191	0.2342	0.5746	216.9	15 476 35 575 Bm
-1	530c	26	530	22.57	32.71	64.35	0.1886	0.2734	0.5378	208.3	16 480 35 578
-1	539c	27	540	23.59	36.41	64.45	0.1895	0.2925	0.5178	203.7	16 481 36 580
-1	545c	29	545	26.51	44.3	64.56	0.1958	0.3272	0.4769	194.9	16 484 36 584
-1	549c	29	550	26.51	44.3	64.56	0.1958	0.3272	0.4769	194.9	16 484 36 584
-1	555c	31	555	30.78	52.59	64.61	0.2079	0.3553	0.4366	186.9	17 486 37 588
-1	560c	32	560	33.47	56.77	64.63	0.2161	0.3665	0.4172	183.4	17 487 38 591
380	770	89.41	88.59	57.3	0.3799	0.3764	0.2435	0.0			

3-000230-L0


TF230-7N_3

TUB-test graphique TF23; maximum C_{AB} , $Y_m=520_770$
XYZ, xyz, h data, P40, $Y_w=88,6$, Parameter: Name




3-000230-L0

TF231-1N_3

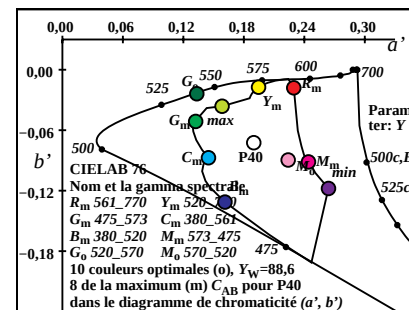


3-000230-L0

TF231-3N_3

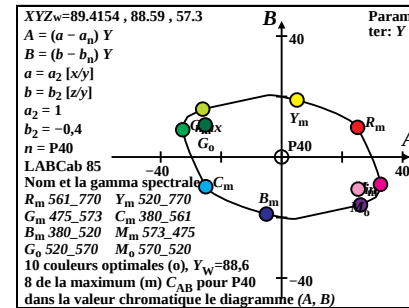


3-000230-L0

TF231-5N_3

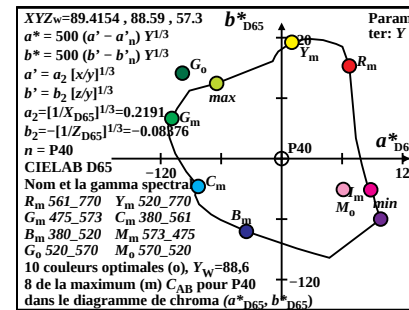


3-000230-L0

TF231-7N_3




3-000230-L0

TF231-2N_3

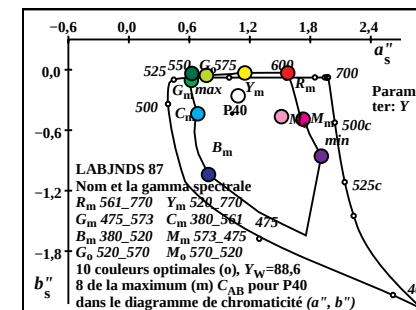


3-000230-L0

TF231-4N_3

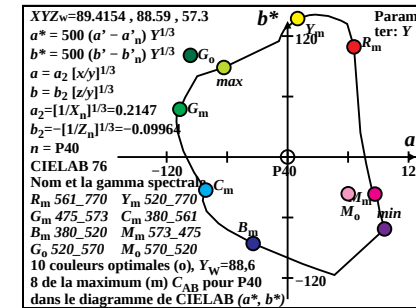

3-000230-L0

TF231-6N_3

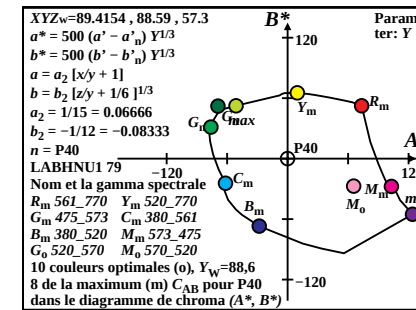









3-000230-L0

TF231-8N_3

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour A00, Y _w =88,6, Y _m =520_770															
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code				
1 405 34 574	24.45	48.43	31.25	0.2347	0.465	0.3001	164.8	18 494	39 599	599	Cm				
6 435 34 574	23.77	48.59	27.06	0.239	0.4887	0.2722	158.6	19 496	42 611	611					
9 450 34 574	22.82	48.83	20.66	0.2472	0.5289	0.2238	148.7	20 501	-1 501c	501c					
12 460 35 575	21.88	49.01	13.06	0.2606	0.5837	0.1556	136.6	21 508	-1 508c	508c					
13 465 35 575	21.91	49.25	10.67	0.2677	0.6018	0.1303	132.7	22 512	-1 512c	512c					
13 470 35 576	22.53	49.84	10.67	0.2712	0.6001	0.1285	132.4	22 513	-1 513c	513c					
14 475 35 577	23.21	50.59	8.56	0.2817	0.6142	0.104	128.7	23 519	-1 519c	519c	Gm				
16 480 35 579	24.42	51.55	5.34	0.3003	0.6339	0.0656	123.0	26 532	-1 532c	532c					
17 485 36 582	27.25	53.64	4.18	0.3202	0.6305	0.0491	119.6	28 540	-1 540c	540c					
18 490 37 588	32.93	57.57	3.26	0.3512	0.6139	0.0348	114.9	29 548	-1 548c	548c	max				
19 495 40 601	47.38	65.98	2.53	0.4088	0.5693	0.0218	103.4	31 559	-1 559c	559c					
20 500 -1 500c	92.54	84.75	1.93	0.5163	0.4728	0.0107	43.5	35 576	13 469						
21 510 -1 509c	92.53	83.55	1.44	0.5212	0.4706	0.0081	40.5	35 576	14 472						
24 520 -1 520c	92.07	77.79	0.58	0.5401	0.4563	0.0034	27.8	35 579	16 480	Ym					
26 530 -1 530c	90.98	72.2	0.31	0.5564	0.4416	0.0019	17.4	36 582	16 484						
28 540 -1 540c	88.92	65.49	0.16	0.5752	0.4236	0.001	7.2	37 585	17 487						
28 545 -1 544c	88.92	65.49	0.16	0.5752	0.4236	0.001	7.2	37 585	17 487						
29 550 -1 549c	87.43	61.79	0.12	0.5854	0.4137	0.0008	2.6	37 586	17 489						
31 555 -1 555c	83.35	53.89	0.07	0.6069	0.3924	0.0005	354.6	38 590	18 491						
32 560 -1 560c	80.69	49.77	0.06	0.6182	0.3813	0.0004	351.3	38 593	18 492						
34 574 1 405	85.39	51.56	4.32	0.6044	0.3649	0.0306	344.8	39 599	18 494	Rm					
34 574 6 435	86.07	51.4	8.51	0.5895	0.352	0.0583	338.7	42 611	19 496						
34 574 9 450	87.02	51.16	14.92	0.5683	0.3341	0.0974	328.7	-1 501c	20 501						
35 575 12 460	87.95	50.98	22.51	0.5447	0.3157	0.1394	316.7	-1 508c	21 508						
35 575 13 465	87.93	50.74	24.91	0.5375	0.3101	0.1522	312.7	-1 512c	22 512						
35 576 13 470	87.31	50.15	24.91	0.5377	0.3088	0.1534	312.4	-1 513c	22 513						
35 577 14 475	86.63	49.4	27.01	0.5313	0.3029	0.1656	308.7	-1 519c	23 519	Mm					
35 579 16 480	85.41	48.44	30.24	0.5205	0.2951	0.1842	303.0	-1 532c	26 532						
36 582 17 485	82.59	46.35	31.39	0.5151	0.289	0.1958	299.7	-1 540c	28 540						
37 588 18 490	76.91	42.42	32.31	0.5071	0.2797	0.213	295.0	-1 548c	29 548	min					
40 601 19 495	62.46	34.01	33.05	0.4822	0.2626	0.2551	283.4	-1 559c	31 559						
-1 500c	20 500	17.3	15.24	33.65	0.2613	0.2302	0.5083	223.5	13 469	35 576					
-1 509c	21 510	17.31	16.44	34.14	0.255	0.2422	0.5027	220.6	14 472	35 576					
-1 520c	24 520	17.77	22.2	34.99	0.237	0.2961	0.4667	207.8	16 480	35 579	Bm				
-1 530c	26 530	18.86	27.79	35.27	0.2302	0.3392	0.4305	197.4	16 484	36 582					
-1 540c	28 540	20.92	34.5	35.41	0.2303	0.3797	0.3898	187.2	17 487	37 585					
-1 544c	28 545	20.92	34.5	35.41	0.2303	0.3797	0.3898	187.2	17 487	37 585					
-1 549c	29 550	22.41	38.2	35.45	0.2333	0.3976	0.369	182.6	17 489	37 586					
-1 555c	31 555	26.48	46.1	35.5	0.245	0.4264	0.3284	174.6	18 491	38 590					
-1 560c	32 560	29.15	50.22	35.52	0.2537	0.4371	0.3091	171.2	18 492	38 593					
380	770	97.31	88.58	31.52	0.4475	0.4074	0.1449	0.0							

TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, A00, Y_w=88,6, Parameter: Name

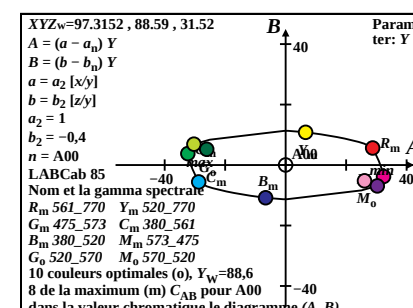

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement





Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour E00, $Y_w=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	$X_{88.6}$	$Y_{88.6}$	$Z_{88.6}$	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code	
1	405	32	564	28.76	50.87	87.07	0.1725	0.3051	0.5222	189.9	16 484 38 592	Cm
6	435	33	565	25.48	51.3	69.01	0.1747	0.3518	0.4733	173.3	17 488 45 627	
10	450	33	566	20.65	51.78	40.05	0.1835	0.4603	0.3561	139.6	19 498 -1 498c	
12	460	33	568	19.25	52.51	26.36	0.1962	0.5351	0.2686	124.1	21 507 -1 507c	
13	465	33	569	19.21	53.28	20.52	0.2065	0.5727	0.2206	117.8	22 514 -1 514c	
14	470	34	571	20.0	54.5	15.7	0.2217	0.6041	0.174	112.3	24 522 -1 522c	
14	475	35	575	22.49	57.16	15.7	0.2358	0.5994	0.1646	110.0	25 525 -1 525c	Gm
16	480	36	581	26.5	60.43	8.9	0.2765	0.6305	0.0929	100.8	27 538 -1 538c	
17	485	39	595	37.68	67.95	6.68	0.3355	0.6049	0.0594	89.5	29 549 -1 549c	
18	490	-1	490c	73.83	83.75	4.99	0.4541	0.5151	0.0307	56.3	33 568 11 459	max
19	495	-1	495c	73.79	82.54	3.69	0.461	0.5157	0.0231	54.9	33 568 12 461	
19	500	-1	499c	73.79	82.54	3.69	0.461	0.5157	0.0231	54.9	33 568 12 461	
22	510	-1	510c	73.67	76.84	1.36	0.485	0.5059	0.0089	48.6	34 571 13 469	
24	520	-1	520c	73.12	70.99	0.69	0.5049	0.4902	0.0047	42.4	34 574 14 473	Ym
26	530	-1	530c	71.74	63.88	0.33	0.5276	0.4698	0.0024	35.0	35 577 15 477	
28	540	-1	540c	69.32	56.0	0.16	0.5524	0.4462	0.0012	27.2	36 581 15 479	
29	545	-1	545c	67.68	51.9	0.11	0.5654	0.4336	0.0009	23.3	36 583 16 480	
29	550	-1	549c	67.68	51.9	0.11	0.5654	0.4336	0.0009	23.3	36 583 16 480	
30	555	-1	554c	65.72	47.77	0.08	0.5786	0.4205	0.0007	19.5	37 585 16 482	
32	560	-1	560c	60.79	39.54	0.05	0.6055	0.3939	0.0005	12.5	38 590 16 483	
32	564	1	405	71.23	49.12	12.92	0.5344	0.3685	0.097	9.9	38 592 16 484	Rm
33	565	6	435	74.51	48.69	30.98	0.4832	0.3157	0.2009	353.3	45 627 17 488	
33	566	10	450	79.34	48.21	59.94	0.4231	0.2571	0.3196	319.7	-1 498c 19 498	
33	568	12	460	80.74	47.48	73.64	0.3999	0.2352	0.3648	304.2	-1 507c 21 507	
33	569	13	465	80.78	46.71	79.47	0.3903	0.2257	0.3839	297.9	-1 514c 22 514	
34	571	14	470	79.99	45.49	84.29	0.3813	0.2168	0.4018	292.4	-1 522c 24 522	
35	575	14	475	77.5	42.83	84.29	0.3787	0.2093	0.4119	290.1	-1 525c 25 525	Mm
36	581	16	480	73.49	39.56	91.09	0.36	0.1938	0.4461	280.8	-1 538c 27 538	
39	595	17	485	62.31	32.04	93.32	0.332	0.1707	0.4972	269.5	-1 549c 29 549	
-1	490c	18	490	26.16	16.24	95.0	0.1904	0.1182	0.6913	236.4	11 459 33 568	min
-1	495c	19	495	26.2	17.45	96.3	0.1872	0.1246	0.688	235.0	12 461 33 568	
-1	499c	19	500	26.2	17.45	96.3	0.1872	0.1246	0.688	235.0	12 461 33 568	
-1	510c	22	510	26.32	23.15	98.63	0.1777	0.1563	0.6659	228.6	13 469 34 571	
-1	520c	24	520	26.87	29.0	99.3	0.1731	0.1868	0.6399	222.4	14 473 34 574	Bm
-1	530c	26	530	28.25	36.11	99.66	0.1722	0.2201	0.6075	215.1	15 477 35 577	
-1	540c	28	540	30.67	43.99	99.83	0.1757	0.2521	0.5721	207.2	15 479 36 581	
-1	545c	29	545	32.31	48.09	99.88	0.1792	0.2667	0.554	203.3	16 480 36 583	
-1	549c	29	550	32.31	48.09	99.88	0.1792	0.2667	0.554	203.3	16 480 36 583	
-1	554c	30	555	34.27	52.22	99.91	0.1838	0.2801	0.5359	199.5	16 482 37 585	
-1	560c	32	560	39.2	60.45	99.94	0.1964	0.3028	0.5007	192.5	16 483 38 590	
380	770	88.59	88.59	88.59	0.3333	0.3333	0.3333	0.0				

3-000430-L0

TF230-7N_5





TUB-test graphique TF23; maximum C_{AB} , $Y_m=520_770$
XYZ, xyz, h data, E00, $Y_w=88,6$, Parameter: Name

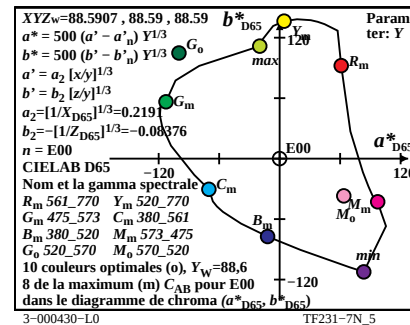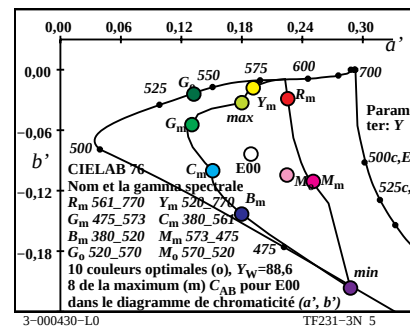

3-000430-L0

TF231-7N_5

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

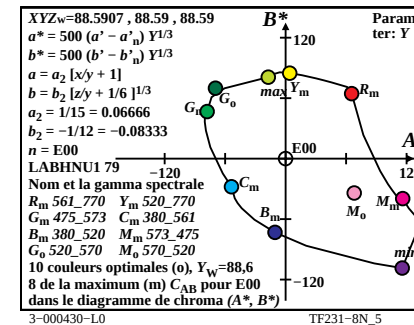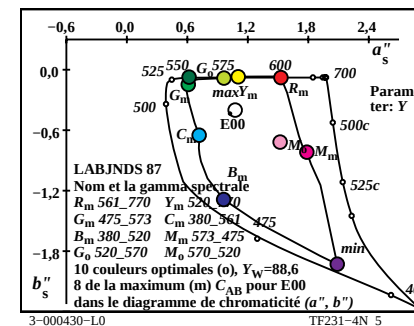





3-000430-L0

TF231-8N_5





Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour C00, $Y_w=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	$X_{88,6}$	$Y_{88,6}$	$Z_{88,6}$	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	32 562	30.57	51.1	103.67	0.1649	0.2756	0.5593	195.5	16 482	37 589	Cm
6 435	32 563	27.1	51.69	84.28	0.1661	0.3169	0.5168	179.6	17 486	42 612	
10 450	32 564	21.08	52.35	48.7	0.1726	0.4286	0.3987	140.6	19 496	-1 496c	
11 460	33 566	20.72	53.63	39.94	0.1813	0.4691	0.3494	130.0	20 501	-1 501c	
13 465	33 568	19.28	54.22	24.52	0.1967	0.5531	0.2501	115.5	22 513	-1 513c	
14 470	34 570	20.14	55.77	18.52	0.2132	0.5906	0.1961	109.4	24 522	-1 522c	
15 475	35 575	22.55	58.4	13.74	0.2381	0.6167	0.1451	103.4	26 530	-1 530c	Gm
16 480	36 582	28.07	62.97	10.08	0.2775	0.6227	0.0996	96.0	28 540	-1 540c	
16 485	40 602	43.26	73.14	10.09	0.342	0.5781	0.0798	83.0	30 551	-1 551c	
18 490	-1 490c	69.45	82.68	5.32	0.441	0.525	0.0338	57.8	33 566	11 459	max
19 495	-1 495c	69.4	81.3	3.83	0.449	0.526	0.0248	56.4	33 567	12 462	
19 500	-1 499c	69.4	81.3	3.83	0.449	0.526	0.0248	56.4	33 567	12 462	
21 510	-1 509c	69.36	77.66	1.92	0.4656	0.5214	0.0128	52.8	33 568	13 466	
24 520	-1 520c	68.74	69.63	0.69	0.4943	0.5006	0.0049	45.0	34 572	14 472	Ym
26 530	-1 530c	67.38	62.62	0.34	0.5169	0.4804	0.0026	38.4	35 575	15 475	
28 540	-1 540c	64.9	54.54	0.16	0.5425	0.456	0.0013	31.0	35 579	15 478	
28 545	-1 544c	64.9	54.54	0.16	0.5425	0.456	0.0013	31.0	35 579	15 478	
29 550	-1 549c	63.17	50.25	0.11	0.5563	0.4425	0.001	27.1	36 581	15 479	
31 555	-1 555c	58.67	41.49	0.06	0.5853	0.4139	0.0006	19.5	37 586	16 481	
31 560	-1 559c	58.67	41.49	0.06	0.5853	0.4139	0.0006	19.5	37 586	16 481	
32 562	1 405	67.5	48.89	14.54	0.5154	0.3734	0.111	15.5	37 589	16 482	Rm
32 563	6 435	70.97	48.3	33.93	0.4632	0.3152	0.2215	359.6	42 612	17 486	
32 564	10 450	76.98	47.64	69.52	0.3965	0.2454	0.358	320.7	-1 496c	19 496	
33 566	11 460	77.34	46.36	78.27	0.3829	0.2295	0.3875	310.1	-1 501c	20 501	
33 568	13 465	78.78	45.77	93.7	0.3609	0.2097	0.4293	295.6	-1 513c	22 513	
34 570	14 470	77.92	44.22	99.7	0.3512	0.1993	0.4494	289.4	-1 522c	24 522	
35 575	15 475	75.51	41.59	104.48	0.3407	0.1876	0.4715	283.4	-1 530c	26 530	Mm
36 582	16 480	70.0	37.02	108.14	0.3253	0.172	0.5025	276.0	-1 540c	28 540	
40 602	16 485	54.8	26.85	108.13	0.2887	0.1415	0.5697	263.0	-1 551c	30 551	
-1 490c	18 490	28.61	17.31	112.89	0.1801	0.109	0.7107	237.9	11 459	33 566	min
-1 495c	19 495	28.66	18.69	114.38	0.1772	0.1155	0.7071	236.5	12 462	33 567	
-1 499c	19 500	28.66	18.69	114.38	0.1772	0.1155	0.7071	236.5	12 462	33 567	
-1 509c	21 510	28.7	22.33	116.3	0.1715	0.1334	0.6949	232.8	13 466	33 568	
-1 520c	24 520	29.32	30.36	117.53	0.1654	0.1713	0.6632	225.0	14 472	34 572	Bm
-1 530c	26 530	30.68	37.37	117.88	0.165	0.201	0.6339	218.4	15 475	35 575	
-1 540c	28 540	33.16	45.45	118.05	0.1686	0.231	0.6002	211.0	15 478	35 579	
-1 544c	28 545	33.16	45.45	118.05	0.1686	0.231	0.6002	211.0	15 478	35 579	
-1 549c	29 550	34.89	49.74	118.1	0.1721	0.2453	0.5825	207.1	15 479	36 581	
-1 555c	31 555	39.39	58.5	118.15	0.1823	0.2707	0.5468	199.5	16 481	37 586	
-1 559c	31 560	39.39	58.5	118.15	0.1823	0.2707	0.5468	199.5	16 481	37 586	
380	770	86.88	88.59	104.73	0.31	0.3161	0.3737	0.0			

TUB-test graphique TF23; maximum C_{AB} , $Y_m=520_770$
XYZ, xyz, h data, C00, $Y_w=88,6$, Parameter: Name

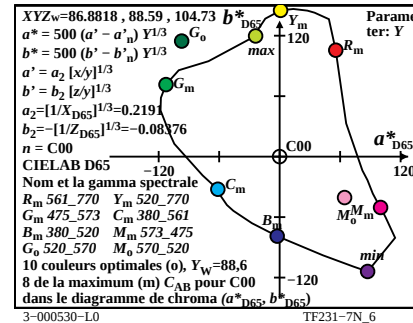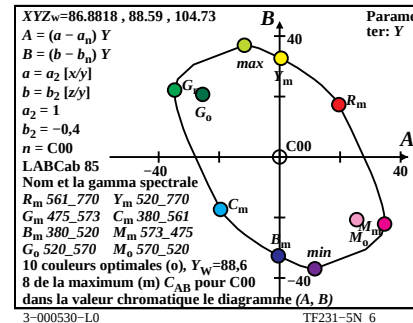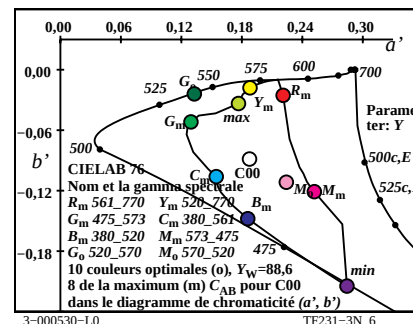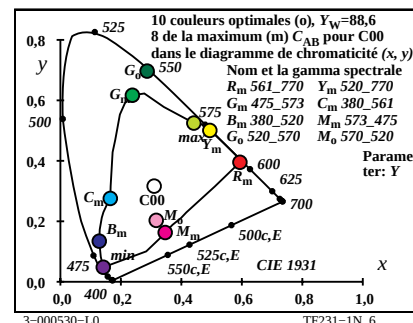

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

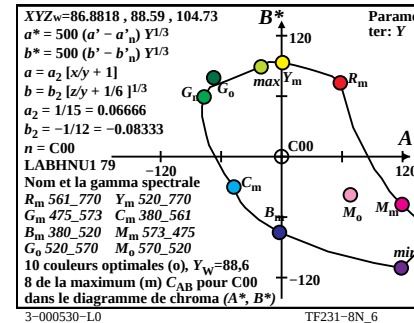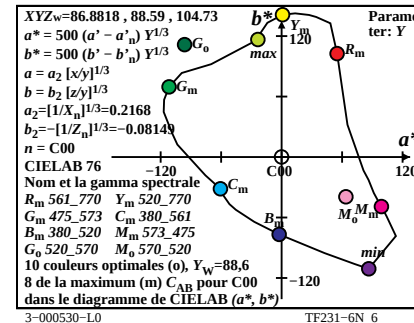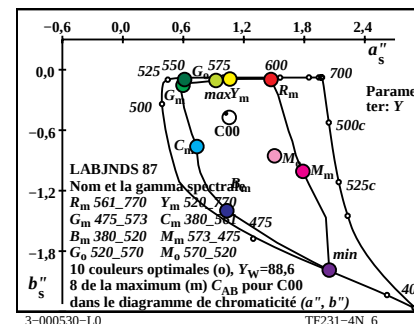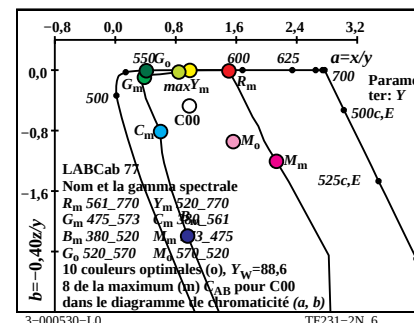

TUB enregistrement: 20130201-TF23/TF23L0NP.PDF /PS
application pour la mesure de sortie sur écran

TUB matériel: code=rha4ta





Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour P00, Y_w=88,6, Y_m=520_770

i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code
1 405	33 567	27.24	50.33	70.7	0.1837	0.3394	0.4768	184.4	17 486	38 594	Cm
7 435	33 567	23.68	50.61	51.5	0.1882	0.4023	0.4093	164.0	18 491	-1 491c	
10 450	33 568	20.95	51.06	33.95	0.1977	0.4818	0.3204	141.6	19 499	-1 499c	
12 460	34 570	19.8	51.65	22.7	0.2103	0.5485	0.2411	127.5	21 507	-1 507c	
13 465	34 571	19.82	52.22	17.84	0.2205	0.5809	0.1984	121.5	22 513	-1 513c	
13 470	34 572	21.05	53.56	17.84	0.2277	0.5792	0.1929	120.4	23 515	-1 515c	
15 475	35 575	22.09	54.9	10.5	0.2524	0.6274	0.12	111.4	25 529	-1 529c	Gm
16 480	36 580	25.6	57.9	7.96	0.2799	0.6329	0.087	106.0	27 537	-1 537c	
17 485	37 589	33.5	63.52	6.02	0.325	0.6164	0.0584	97.6	29 547	-1 547c	
18 490	45 625	63.97	78.78	4.54	0.4342	0.5348	0.0308	67.8	32 564	-1 564c	max
18 495	-1 494c	78.64	84.48	4.54	0.469	0.5038	0.0271	54.2	34 570	12 460	
20 500	-1 500c	78.59	82.05	2.49	0.4817	0.5029	0.0153	50.9	34 571	13 465	
22 510	-1 510c	78.49	78.23	1.29	0.4967	0.495	0.0081	46.1	34 573	14 470	
24 520	-1 520c	77.98	72.8	0.66	0.5148	0.4807	0.0043	39.5	35 575	14 474	Ym
25 530	-1 529c	77.44	69.57	0.47	0.525	0.4717	0.0032	35.7	35 577	15 476	
28 540	-1 540c	74.34	58.47	0.16	0.559	0.4397	0.0012	23.5	36 582	16 481	
28 545	-1 544c	74.34	58.47	0.16	0.559	0.4397	0.0012	23.5	36 582	16 481	
30 550	-1 550c	70.8	50.39	0.08	0.5837	0.4155	0.0007	15.5	37 586	16 483	
30 555	-1 554c	70.8	50.39	0.08	0.5837	0.4155	0.0007	15.5	37 586	16 483	
32 560	-1 560c	65.87	42.17	0.05	0.6093	0.3901	0.0005	8.4	38 591	17 485	
33 567	1 405	74.81	49.66	10.35	0.5548	0.3683	0.0767	4.4	38 594	17 486	Rm
33 567	7 435	78.37	49.38	29.55	0.4982	0.3139	0.1878	344.0	-1 491c	18 491	
33 568	10 450	81.11	48.93	47.1	0.4578	0.2762	0.2659	321.7	-1 499c	19 499	
34 570	12 460	82.26	48.34	58.35	0.4353	0.2558	0.3088	307.5	-1 507c	21 507	
34 571	13 465	82.23	47.77	63.21	0.4256	0.2472	0.3271	301.6	-1 513c	22 513	
34 572	13 470	81.0	46.43	63.21	0.4248	0.2435	0.3315	300.4	-1 515c	23 515	
35 575	15 475	79.97	45.09	70.55	0.4088	0.2305	0.3606	291.5	-1 529c	25 529	Mm
36 580	16 480	76.45	42.09	73.09	0.3989	0.2196	0.3814	286.0	-1 537c	27 537	
37 589	17 485	68.56	36.47	75.03	0.3807	0.2025	0.4167	277.6	-1 547c	29 547	
45 625	18 490	38.09	21.21	76.51	0.2804	0.1561	0.5633	247.9	-1 564c	32 564	min
-1 494c	18 495	23.42	15.51	76.51	0.2028	0.1343	0.6627	234.2	12 460	34 570	
-1 500c	20 500	23.47	17.94	78.56	0.1956	0.1495	0.6548	231.0	13 465	34 571	
-1 510c	22 510	23.56	21.76	79.76	0.1883	0.1739	0.6376	226.1	14 470	34 573	
-1 520c	24 520	24.07	27.19	80.39	0.1828	0.2065	0.6105	219.5	14 474	35 575	Bm
-1 529c	25 530	24.61	30.42	80.58	0.1815	0.2243	0.5941	215.7	15 476	35 577	
-1 540c	28 540	27.72	41.52	80.89	0.1846	0.2765	0.5388	203.5	16 481	36 582	
-1 544c	28 545	27.72	41.52	80.89	0.1846	0.2765	0.5388	203.5	16 481	36 582	
-1 550c	30 550	31.26	49.6	80.97	0.1931	0.3065	0.5003	195.6	16 483	37 586	
-1 554c	30 555	31.26	49.6	80.97	0.1931	0.3065	0.5003	195.6	16 483	37 586	
-1 560c	32 560	36.19	57.82	81.0	0.2067	0.3303	0.4628	188.4	17 485	38 591	
380	770	90.42	88.59	71.81	0.3604	0.3531	0.2863	0.0			

3-000630-L0

TF230-7N_7





TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, P00, Y_w=88,6, Parameter: Name

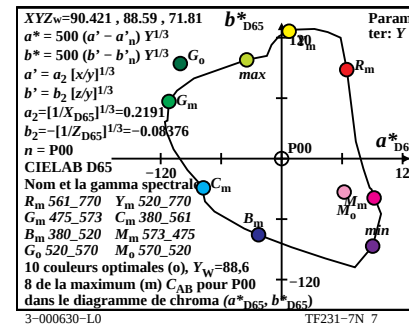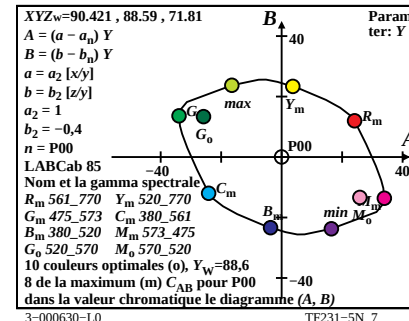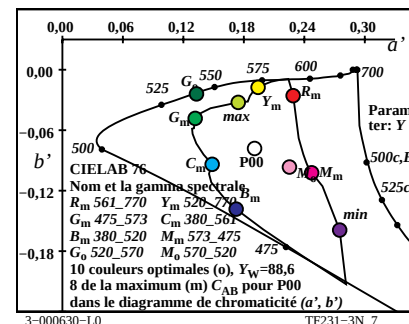

3-000630-L0

TF231-7N_7

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

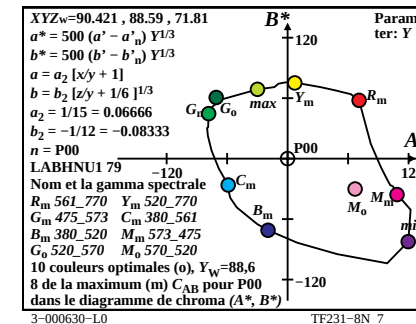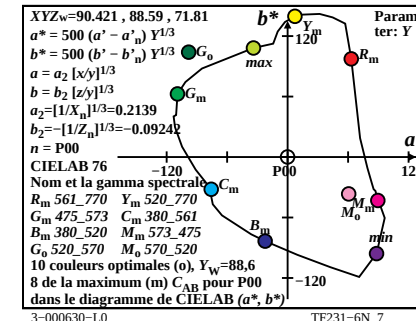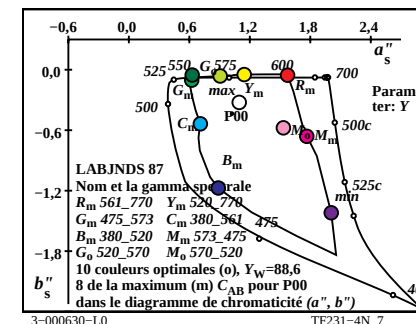









3-000630-L0

TF231-8N_7

TUB matériel: code=rha4ta

Ostwald couleurs optimales (o) de la maximum (m) C_{AB} pour $Q00$, $Y_w=88,6$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	$X_{88,6}$	$Y_{88,6}$	$Z_{88,6}$	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	32 562	30.39	51.28	103.44	0.1641	0.277	0.5587	194.9	16 482	38 590	Cm
7 435	32 562	24.57	51.72	72.55	0.165	0.3474	0.4874	167.4	17 488	-1 488c	
10 450	32 564	20.35	52.44	46.16	0.171	0.4408	0.388	137.7	19 497	-1 497c	
11 460	33 566	20.01	53.67	37.79	0.1795	0.4814	0.339	127.9	20 502	-1 502c	
12 465	33 568	19.74	54.66	30.01	0.189	0.5234	0.2874	119.9	21 508	-1 508c	
14 470	34 570	19.52	55.78	17.62	0.21	0.6002	0.1896	109.1	24 522	-1 522c	
15 475	35 575	21.9	58.38	13.22	0.2342	0.6243	0.1413	103.6	26 530	-1 530c	Gm
16 480	36 582	27.43	62.99	9.85	0.2735	0.6281	0.0982	96.4	27 539	-1 539c	
17 485	40 602	42.96	72.6	7.33	0.3496	0.5907	0.0596	81.5	30 552	-1 552c	
17 490	-1 489c	69.13	84.1	7.34	0.4305	0.5237	0.0457	59.7	33 565	11 455	max
18 495	-1 494c	69.02	83.02	5.43	0.4382	0.5271	0.0345	58.5	33 565	11 458	
20 500	-1 500c	68.96	80.01	2.88	0.4541	0.5268	0.019	55.5	33 567	12 463	
21 510	-1 509c	68.93	77.94	2.04	0.4628	0.5233	0.0137	53.4	33 568	13 465	
23 520	-1 519c	68.64	72.51	1.01	0.4828	0.51	0.0071	48.1	34 571	14 470	Ym
26 530	-1 530c	66.8	61.69	0.34	0.5185	0.4788	0.0026	37.9	35 576	15 475	
27 540	-1 539c	65.69	57.66	0.23	0.5315	0.4665	0.0018	34.1	35 578	15 477	
28 545	-1 544c	64.3	53.52	0.16	0.545	0.4536	0.0013	30.3	36 580	15 478	
29 550	-1 549c	62.62	49.33	0.11	0.5587	0.4402	0.001	26.5	36 582	15 479	
30 555	-1 554c	60.64	45.14	0.08	0.5727	0.4264	0.0007	22.7	36 584	16 480	
31 560	-1 559c	58.33	40.99	0.06	0.5869	0.4124	0.0006	19.2	37 587	16 481	
32 562	1 405	67.54	48.71	15.51	0.5125	0.3697	0.1177	14.8	38 590	16 482	Rm
32 562	7 435	73.36	48.27	46.39	0.4365	0.2872	0.2761	347.5	-1 488c	17 488	
32 564	10 450	77.57	47.55	72.78	0.3919	0.2402	0.3677	317.7	-1 497c	19 497	
33 566	11 460	77.92	46.32	81.15	0.3793	0.2255	0.3951	308.0	-1 502c	20 502	
33 568	12 465	78.18	45.33	88.93	0.368	0.2133	0.4186	300.0	-1 508c	21 508	
34 570	14 470	78.4	44.21	101.32	0.3501	0.1974	0.4524	289.2	-1 522c	24 522	
35 575	15 475	76.02	41.61	105.73	0.3403	0.1862	0.4733	283.6	-1 530c	26 530	Mm
36 582	16 480	70.49	37.0	109.09	0.3254	0.1708	0.5036	276.5	-1 539c	27 539	
40 602	17 485	54.96	27.39	111.61	0.2833	0.1412	0.5754	261.6	-1 552c	30 552	
-1 489c	17 490	28.79	15.89	111.61	0.1842	0.1016	0.714	239.7	11 455	33 565	min
-1 494c	18 495	28.9	16.97	113.51	0.1813	0.1065	0.7121	238.6	11 458	33 565	
-1 500c	20 500	28.97	19.98	116.06	0.1755	0.1211	0.7033	235.5	12 463	33 567	
-1 509c	21 510	28.99	22.05	116.9	0.1726	0.1312	0.696	233.5	13 465	33 568	
-1 519c	23 520	29.28	27.48	117.93	0.1676	0.1573	0.675	228.2	14 470	34 571	Bm
-1 530c	26 530	31.12	38.3	118.61	0.1655	0.2037	0.6307	217.9	15 475	35 576	
-1 539c	27 540	32.23	42.33	118.72	0.1667	0.219	0.6141	214.1	15 477	35 578	
-1 544c	28 545	33.62	46.47	118.79	0.169	0.2336	0.5972	210.3	15 478	36 580	
-1 549c	29 550	35.3	50.66	118.83	0.1723	0.2473	0.5802	206.5	15 479	36 582	
-1 554c	30 555	37.29	54.85	118.87	0.1767	0.2599	0.5633	202.8	16 480	36 584	
-1 559c	31 560	39.59	59.0	118.89	0.182	0.2713	0.5466	199.2	16 481	37 587	
380	770	86.75	88.59	105.38	0.309	0.3155	0.3753	0.0			

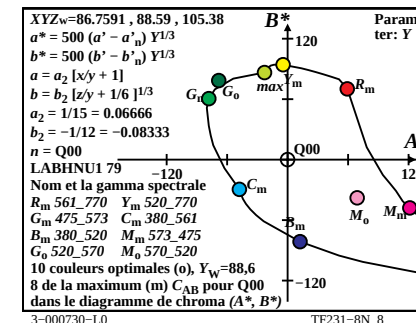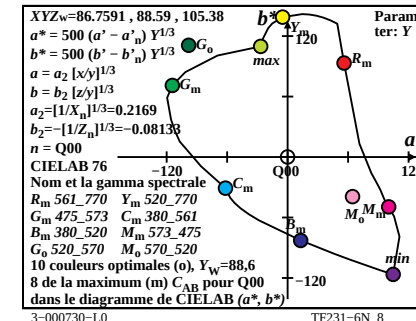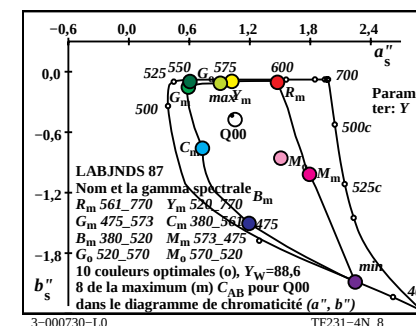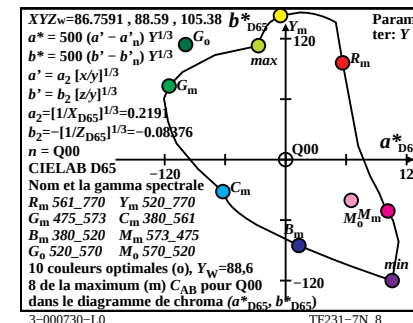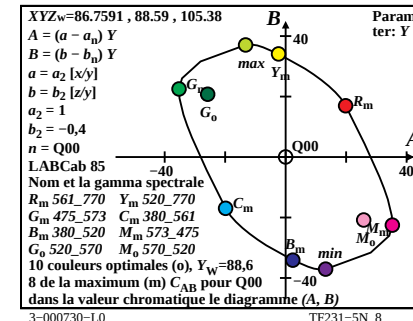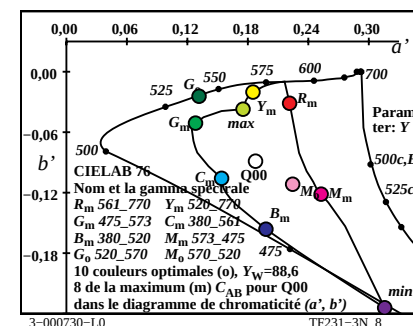

TUB-test graphique TF23; maximum C_{AB} , $Y_m=520_770$
XYZ, xyz, h data, Q00, $Y_w=88,6$, Parameter: Name





entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour D65, Y _{w,10} =88,6, Y _m =520_770														
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code			
0 405	31 556	28.12	50.11	94.37	0.1629	0.2903	0.5467	195.0	15 476	37 585	Cm			
6 435	31 557	24.8	50.86	74.08	0.1656	0.3396	0.4947	176.6	16 480	44 621				
10 450	31 559	19.54	50.96	41.21	0.1749	0.4561	0.3689	137.9	18 491	-1 491c				
11 460	32 562	19.75	52.51	33.04	0.1875	0.4986	0.3137	126.9	19 498	-1 498c				
12 465	33 565	20.22	53.96	25.67	0.2025	0.5403	0.2571	117.9	21 506	-1 506c				
14 470	34 570	21.81	55.87	14.19	0.2373	0.6081	0.1544	105.3	24 522	-1 522c				
15 475	35 579	27.93	60.81	10.22	0.2822	0.6144	0.1032	96.3	26 533	-1 533c	Gm			
16 480	41 606	47.87	72.59	7.29	0.3746	0.5682	0.0571	75.5	30 550	-1 550c				
16 485	-1 484c	68.26	81.76	7.29	0.4339	0.5197	0.0463	57.5	32 560	10 454				
18 490	-1 490c	68.1	78.9	3.72	0.4518	0.5234	0.0247	54.3	32 562	11 459	max			
19 495	-1 495c	68.08	77.11	2.63	0.4605	0.5216	0.0178	52.4	32 563	12 461				
19 500	-1 499c	68.08	77.11	2.63	0.4605	0.5216	0.0178	52.4	32 563	12 461				
22 510	-1 510c	67.71	70.07	0.89	0.4882	0.5052	0.0064	44.9	33 566	13 466				
23 520	-1 519c	67.33	67.16	0.6	0.4983	0.4971	0.0045	41.9	33 568	13 468	Ym			
26 530	-1 530c	64.81	56.85	0.14	0.532	0.4667	0.0012	31.8	34 573	14 472				
27 540	-1 539c	63.44	53.07	0.07	0.5441	0.4551	0.0006	28.3	35 576	14 473				
28 545	-1 544c	61.79	49.2	0.03	0.5565	0.4431	0.0003	24.7	35 578	14 474				
29 550	-1 549c	59.85	45.28	0.01	0.5691	0.4306	0.0001	21.3	36 580	15 475				
31 555	-1 555c	55.06	37.53	0.0	0.5946	0.4053	0.0	14.8	37 586	15 476				
32 560	10 451	62.45	35.47	51.78	0.4171	0.2369	0.3458	317.7	-1 492c	18 492				
31 556	0 405	66.68	49.88	12.95	0.5148	0.3851	0.1	15.0	37 585	15 476	Rm			
31 557	6 435	70.0	49.13	33.24	0.4594	0.3224	0.2181	356.6	44 621	16 480				
31 559	10 450	75.26	49.03	66.11	0.3952	0.2575	0.3472	317.9	-1 491c	18 491				
32 562	11 460	75.06	47.48	74.29	0.3813	0.2412	0.3774	307.0	-1 498c	19 498				
33 565	12 465	74.58	46.03	81.65	0.3687	0.2275	0.4036	298.0	-1 506c	21 506				
34 570	14 470	73.0	44.12	93.14	0.3471	0.2098	0.4429	285.4	-1 522c	24 522				
35 579	15 475	66.88	39.18	97.11	0.3291	0.1928	0.4779	276.3	-1 533c	26 533	Mm			
41 606	16 480	46.93	27.4	100.03	0.2691	0.1571	0.5736	255.6	-1 550c	30 550				
-1 484c	16 485	26.54	18.23	100.03	0.1833	0.1258	0.6907	237.5	10 454	32 560				
-1 490c	18 490	26.71	21.09	103.61	0.1764	0.1393	0.6842	234.3	11 459	32 562	min			
-1 495c	19 495	26.73	22.88	104.69	0.1732	0.1482	0.6784	232.4	12 461	32 563				
-1 499c	19 500	26.73	22.88	104.69	0.1732	0.1482	0.6784	232.4	12 461	32 563				
-1 510c	22 510	27.1	29.92	106.43	0.1657	0.183	0.6511	225.0	13 466	33 566				
-1 519c	23 520	27.48	32.83	106.72	0.1645	0.1965	0.6389	222.0	13 468	33 568	Bm			
-1 530c	26 530	30.0	43.14	107.18	0.1663	0.2392	0.5943	211.8	14 472	34 573				
-1 539c	27 540	31.36	46.92	107.25	0.169	0.2529	0.578	208.3	14 473	35 576				
-1 544c	28 545	33.01	50.79	107.29	0.1727	0.2657	0.5614	204.8	14 474	35 578				
-1 549c	29 550	34.96	54.71	107.32	0.1774	0.2777	0.5447	201.3	15 475	36 580				
-1 555c	31 555	39.75	62.46	107.33	0.1896	0.298	0.5122	194.8	15 476	37 586				
10 451	32 560	32.36	64.52	55.55	0.2122	0.4232	0.3644	137.6	18 492	-1 492c				
380	770	83.99	88.59	95.08	0.3137	0.3309	0.3552	0.0						

3-001030-L0

TF230-7N_1





TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, D65, Y_{w,10}=88,6, Parameter: Name

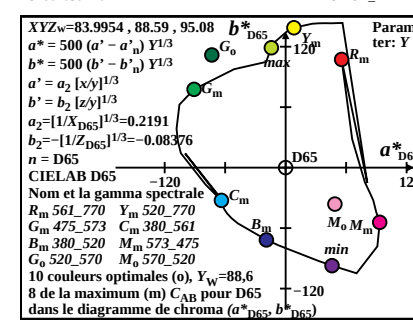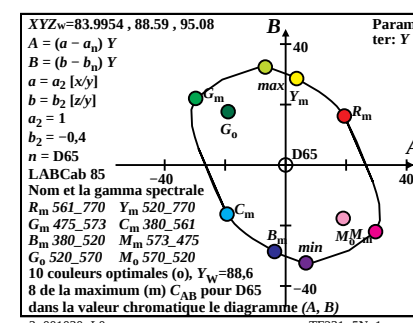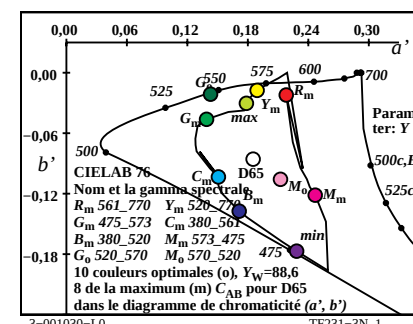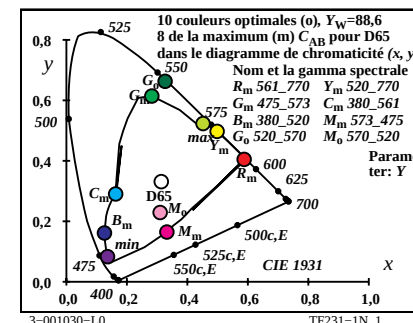

3-001030-L0

TF231-7N_1

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

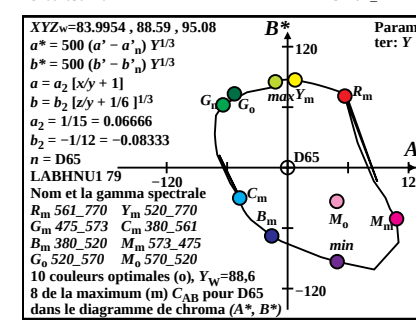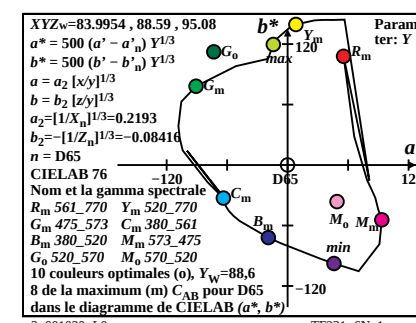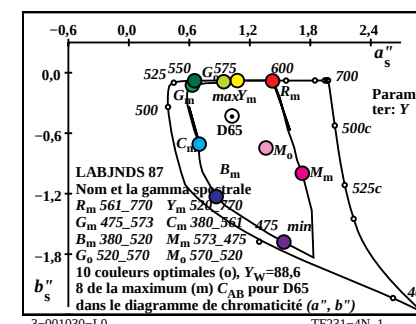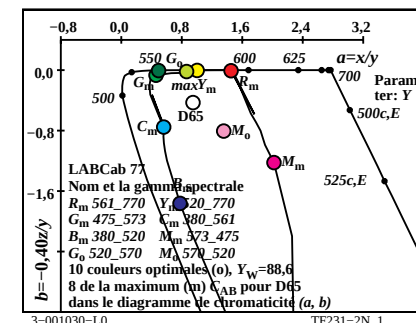









3-001030-L0

TF231-8N_1

voir des fichiers similaires: <http://130.149.60.45/~farbmetrik/TF23/TF23L0NP.PDF> /PS
informations techniques: <http://www.ps.bam.de> ou <http://130.149.60.45/~farbmetrik>

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour D50, Y _{w,10} =88,6, Y _m =520_770														
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code			
1 405	31 559	25.72	49.57	71.05	0.1757	0.3387	0.4855	186.9	15 479	37 589	Cm			
7 435	32 561	22.74	49.98	52.96	0.1809	0.3976	0.4213	167.1	16 484	58 693				
10 450	32 562	19.94	50.19	33.68	0.1921	0.4834	0.3244	141.4	18 493	-1 493c				
12 460	32 564	19.11	50.86	21.5	0.2089	0.5559	0.2351	125.2	20 503	-1 503c				
13 465	33 566	19.68	51.8	16.41	0.2239	0.5892	0.1867	118.3	22 512	-1 512c				
14 470	34 570	21.54	53.71	12.21	0.2462	0.614	0.1396	111.7	24 521	-1 521c				
15 475	35 576	25.74	57.15	8.92	0.2803	0.6224	0.0971	104.3	26 531	-1 531c	Gm			
16 480	38 590	36.57	64.56	6.46	0.3399	0.6	0.06	91.8	28 543	-1 543c				
17 485	-1 485c	73.94	82.03	4.68	0.4602	0.5105	0.0291	53.2	32 563	11 458				
18 490	-1 490c	73.91	80.7	3.39	0.4677	0.5107	0.0214	51.5	32 564	12 460	max			
19 495	-1 495c	73.89	79.13	2.43	0.4753	0.509	0.0156	49.5	33 565	12 462				
20 500	-1 500c	73.85	77.28	1.72	0.4831	0.5055	0.0113	47.1	33 566	12 464				
21 510	-1 509c	73.75	75.15	1.22	0.4912	0.5005	0.0081	44.4	33 567	13 466				
24 520	-1 520c	72.64	66.96	0.39	0.5188	0.4783	0.0027	34.7	34 571	14 471	Ym			
25 530	-1 529c	71.83	63.63	0.24	0.5293	0.4688	0.0018	31.0	34 573	14 473				
28 540	-1 540c	67.8	52.55	0.03	0.5631	0.4365	0.0002	19.6	35 579	15 476				
29 545	-1 545c	65.86	48.65	0.01	0.575	0.4248	0.0001	16.0	36 581	15 477				
29 550	-1 549c	65.86	48.65	0.01	0.575	0.4248	0.0001	16.0	36 581	15 477				
31 555	-1 555c	61.01	40.81	0.0	0.5991	0.4008	0.0	9.3	37 587	15 479				
32 560	2 411	58.5	37.02	1.78	0.6012	0.3804	0.0183	4.7	38 591	16 480				
31 559	1 405	70.99	50.42	10.35	0.5387	0.3826	0.0785	6.9	37 589	15 479	Rm			
32 561	7 435	73.98	50.01	28.44	0.4852	0.328	0.1866	347.1	58 693	16 484				
32 562	10 450	76.78	49.8	47.72	0.4404	0.2857	0.2738	321.5	-1 493c	18 493				
32 564	12 460	77.61	49.13	59.9	0.4158	0.2632	0.3209	305.2	-1 503c	20 503				
33 566	13 465	77.03	48.19	64.99	0.4049	0.2533	0.3416	298.3	-1 512c	22 512				
34 570	14 470	75.18	46.28	69.19	0.3943	0.2427	0.3629	291.7	-1 521c	24 521				
35 576	15 475	70.98	42.84	72.48	0.3809	0.2299	0.389	284.4	-1 531c	26 531	Mm			
38 590	16 480	60.14	35.43	74.95	0.3526	0.2077	0.4395	271.9	-1 543c	28 543				
-1 485c	17 485	22.77	17.96	76.72	0.1938	0.1529	0.6531	233.3	11 458	32 563				
-1 490c	18 490	22.81	19.29	78.02	0.1899	0.1605	0.6494	231.5	12 460	32 564	min			
-1 495c	19 495	22.83	20.86	78.97	0.1861	0.1701	0.6437	229.5	12 462	33 565				
-1 500c	20 500	22.86	22.71	79.68	0.1825	0.1813	0.636	227.1	12 464	33 566				
-1 509c	21 510	22.96	24.84	80.18	0.1794	0.1941	0.6264	224.5	13 466	33 567				
-1 520c	24 520	24.08	33.03	81.02	0.1743	0.2391	0.5865	214.7	14 471	34 571	Bm			
-1 529c	25 530	24.88	36.36	81.16	0.1747	0.2553	0.5699	211.0	14 473	34 573				
-1 540c	28 540	28.92	47.44	81.37	0.1833	0.3007	0.5158	199.6	15 476	35 579				
-1 545c	29 545	30.86	51.34	81.39	0.1886	0.3138	0.4975	196.0	15 477	36 581				
-1 549c	29 550	30.86	51.34	81.39	0.1886	0.3138	0.4975	196.0	15 477	36 581				
-1 555c	31 555	35.7	59.18	81.41	0.2025	0.3356	0.4617	189.3	15 479	37 587				
2 411	32 560	38.21	62.97	79.63	0.2113	0.3482	0.4403	184.7	16 480	38 591				
380	770	85.68	88.58	72.12	0.3477	0.3595	0.2927	0.0						

TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, D50, Y_{w,10}=88,6, Parameter: Name

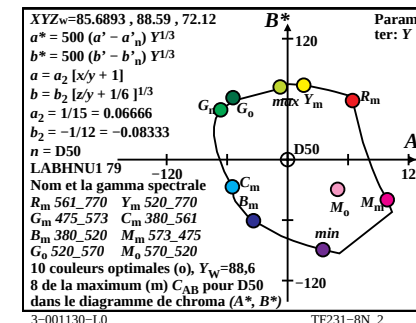
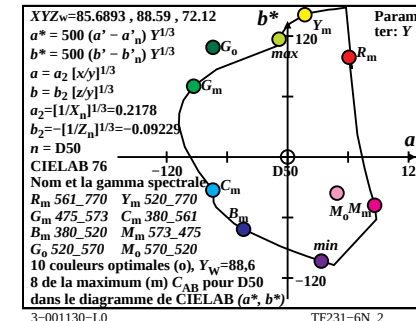
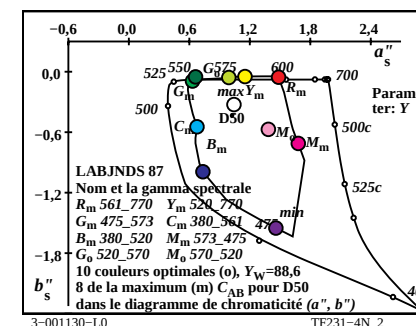
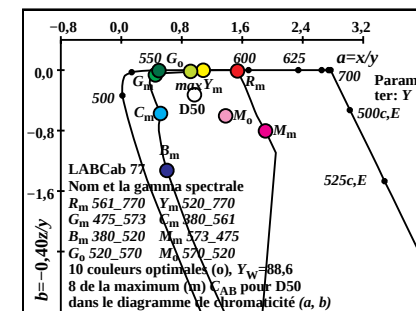
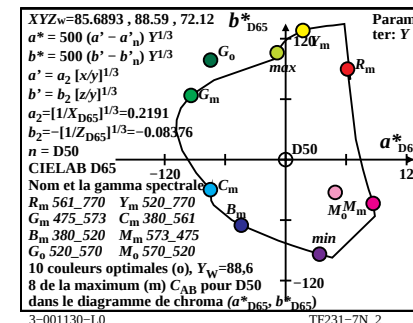
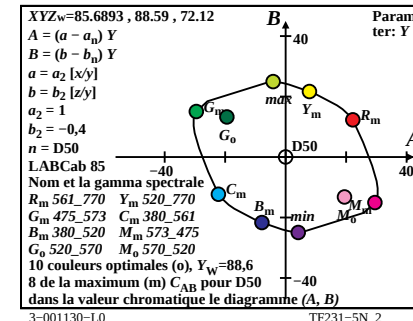
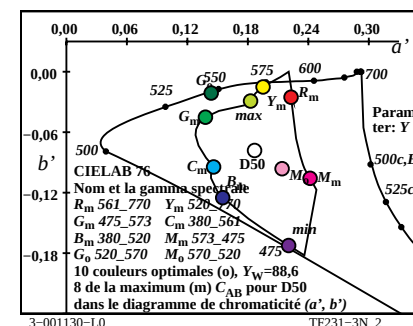



entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement









TUB enregistrement: 20130201-TF23/TF23L0NP.PDF /PS
application pour la mesure de sortie sur écran

TUB matériel: code=rha4ta









Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour P40, Y _{w,10} =88,6, Y _m =520_770													
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code		
0 405	32 563	25.22	48.29	56.71	0.1937	0.3708	0.4354	181.4	16 481	38 591	Cm		
7 435	32 564	22.5	48.56	40.64	0.2014	0.4347	0.3638	161.8	17 487	-1 487c			
10 450	33 565	20.53	48.79	26.34	0.2146	0.5099	0.2753	141.2	19 495	-1 495c			
12 460	33 567	20.14	49.38	17.32	0.2319	0.5686	0.1994	127.9	21 505	-1 505c			
12 465	33 568	21.3	50.64	17.32	0.2386	0.5673	0.194	126.8	21 506	-1 506c			
14 470	34 571	22.34	51.74	10.14	0.2652	0.6142	0.1204	116.0	24 521	-1 521c			
15 475	35 576	25.73	54.48	7.56	0.2931	0.6206	0.0861	109.9	26 531	-1 531c	Gm		
16 480	37 585	33.82	60.22	5.58	0.3394	0.6044	0.056	100.5	28 542	-1 542c			
17 485	42 611	57.84	73.36	4.1	0.4274	0.5421	0.0303	74.7	31 558	-1 558c			
17 490	-1 489c	80.89	83.41	4.1	0.4803	0.4952	0.0243	50.6	33 566	11 458	max		
19 495	-1 495c	80.84	80.92	2.17	0.4931	0.4935	0.0132	46.7	33 568	12 463			
20 500	-1 500c	80.81	79.31	1.56	0.4998	0.4905	0.0096	44.3	33 569	13 465			
22 510	-1 510c	80.54	75.25	0.78	0.5143	0.4805	0.005	38.4	34 571	13 469			
23 520	-1 519c	80.22	72.76	0.54	0.5225	0.4739	0.0035	35.0	34 572	14 471	Ym		
25 530	-1 529c	78.98	66.96	0.22	0.5403	0.4581	0.0015	27.5	35 575	14 474			
28 540	-1 540c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36 581	15 477			
28 545	-1 544c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36 581	15 477			
30 550	-1 550c	71.13	49.03	0.0	0.5919	0.408	0.0	8.7	37 585	15 479			
31 555	-1 555c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37 587	16 480			
31 560	-1 559c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37 587	16 480			
32 563	0 405	76.52	51.7	7.73	0.5628	0.3803	0.0568	1.4	38 591	16 481	Rm		
32 564	7 435	79.24	51.43	23.8	0.5129	0.3329	0.154	341.9	-1 487c	17 487			
33 565	10 450	81.21	51.2	38.09	0.4762	0.3003	0.2234	321.3	-1 495c	19 495			
33 567	12 460	81.6	50.61	47.12	0.455	0.2822	0.2627	307.9	-1 505c	21 505			
33 568	12 465	80.44	49.35	47.12	0.4547	0.2789	0.2663	306.8	-1 506c	21 506			
34 571	14 470	79.4	48.25	54.29	0.4363	0.2651	0.2984	296.1	-1 521c	24 521			
35 576	15 475	76.01	45.51	56.88	0.426	0.255	0.3188	290.0	-1 531c	26 531	Mm		
37 585	16 480	67.92	39.77	58.85	0.4078	0.2387	0.3533	280.6	-1 542c	28 542			
42 611	17 485	43.9	26.63	60.34	0.3354	0.2034	0.461	254.8	-1 558c	31 558			
-1 489c	17 490	20.85	16.58	60.34	0.2132	0.1696	0.6171	230.6	11 458	33 566	min		
-1 495c	19 495	20.9	19.07	62.27	0.2044	0.1865	0.609	226.7	12 463	33 568			
-1 500c	20 500	20.93	20.68	62.88	0.2003	0.1979	0.6017	224.3	13 465	33 569			
-1 510c	22 510	21.2	24.74	63.66	0.1934	0.2257	0.5807	218.4	13 469	34 571			
-1 519c	23 520	21.53	27.23	63.9	0.191	0.2417	0.5671	215.0	14 471	34 572	Bm		
-1 529c	25 530	22.76	33.03	64.21	0.1897	0.2752	0.535	207.5	14 474	35 575			
-1 540c	28 540	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15 477	36 581			
-1 544c	28 545	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15 477	36 581			
-1 550c	30 550	30.61	50.96	64.44	0.2096	0.349	0.4413	188.7	15 479	37 585			
-1 555c	31 555	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16 480	37 587			
-1 559c	31 560	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16 480	37 587			
380	770	90.14	88.59	57.09	0.3822	0.3756	0.2421	0.0					

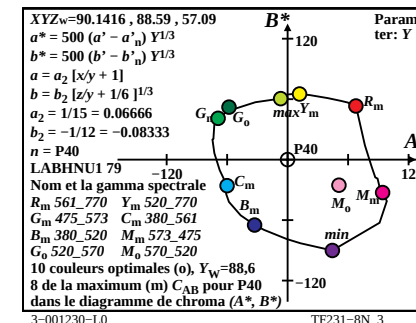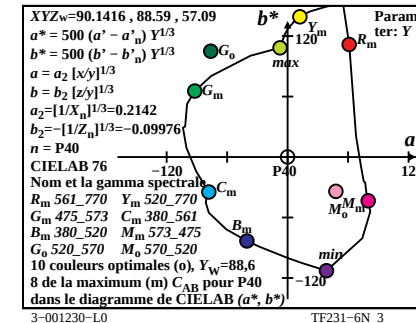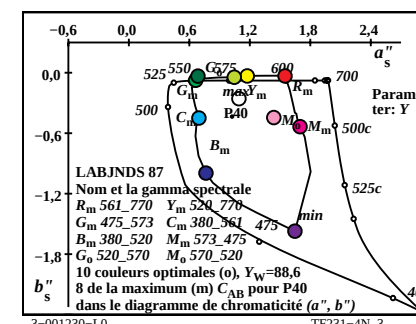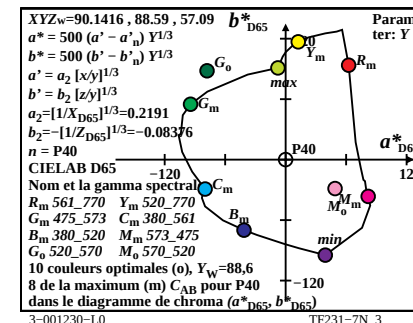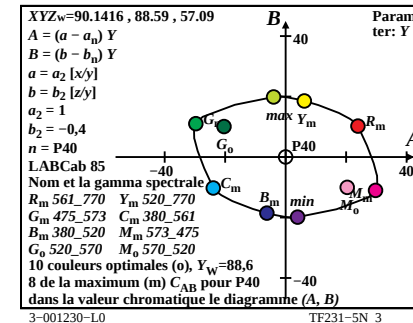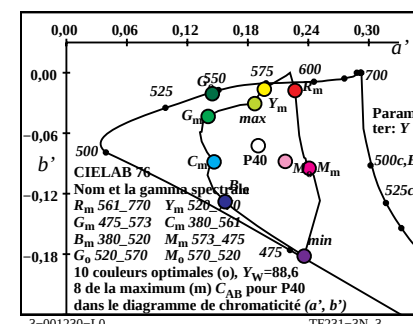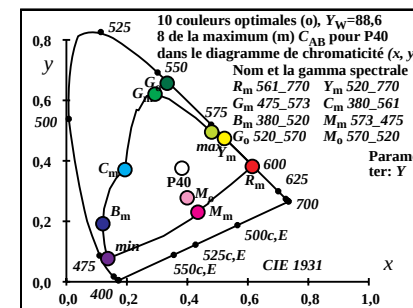









Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour A00, Y _{w,10} =88,6, Y _m =520_770															
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code				
1 405 34 570	24.41	46.3	30.85	0.2404	0.4558	0.3037	166.6	17 487	39 597	597	Cm				
7 435 34 570	23.37	46.48	23.83	0.2494	0.4961	0.2544	155.9	18 491	47 639						
9 450 34 571	22.92	46.75	19.01	0.2584	0.5271	0.2144	147.8	19 495	-1 495c						
12 460 34 572	22.3	46.95	11.32	0.2768	0.5826	0.1405	134.6	21 505	-1 505c						
13 465 34 573	22.67	47.37	9.0	0.2867	0.5992	0.1139	130.3	22 512	-1 512c						
14 470 34 574	23.6	48.19	6.99	0.2995	0.6116	0.0887	126.3	24 520	-1 520c						
15 475 35 576	25.5	49.59	5.35	0.3169	0.6164	0.0665	122.5	25 528	-1 528c	Gm					
16 480 36 581	29.32	52.34	4.06	0.342	0.6105	0.0474	118.0	27 537	-1 537c						
17 485 37 588	37.11	57.43	3.06	0.3802	0.5884	0.0313	111.2	29 547	-1 547c						
18 490 41 609	60.13	69.96	2.29	0.4542	0.5284	0.0173	88.5	32 561	-1 561c	max					
19 495 -1 495c	93.65	83.69	1.7	0.523	0.4674	0.0095	40.5	34 573	13 465						
20 500 -1 500c	93.63	82.5	1.25	0.5278	0.4651	0.007	37.6	34 573	13 468						
21 510 -1 509c	93.56	81.07	0.91	0.5329	0.4618	0.0052	34.3	34 574	14 470						
24 520 -1 520c	92.73	75.08	0.31	0.5515	0.4465	0.0018	22.0	35 577	15 476	Ym					
25 530 -1 529c	92.11	72.52	0.2	0.5588	0.4399	0.0012	17.5	35 578	15 477						
27 540 -1 539c	90.14	66.59	0.06	0.5748	0.4246	0.0004	8.6	36 581	16 480						
29 545 -1 545c	86.98	59.77	0.01	0.5926	0.4072	0.0	0.5	37 585	16 483						
30 550 -1 550c	84.87	56.1	0.0	0.602	0.3979	0.0	356.9	37 587	16 484						
31 555 -1 555c	82.34	52.29	0.0	0.6116	0.3883	0.0	353.7	37 589	17 485						
32 560 -1 560c	79.36	48.36	0.0	0.6213	0.3786	0.0	350.9	38 592	17 486						
34 570 1 405	86.73	53.69	4.34	0.599	0.3709	0.03	346.6	39 597	17 487	Rm					
34 570 7 435	87.77	53.51	11.36	0.575	0.3505	0.0744	335.9	47 639	18 491						
34 571 9 450	88.22	53.24	16.18	0.5596	0.3377	0.1026	327.8	-1 495c	19 495						
34 572 12 460	88.84	53.04	23.87	0.5359	0.32	0.144	314.6	-1 505c	21 505						
34 573 13 465	88.47	52.62	26.19	0.5288	0.3145	0.1565	310.4	-1 512c	22 512						
34 574 14 470	87.54	51.8	28.2	0.5224	0.3091	0.1683	306.4	-1 520c	24 520						
35 576 15 475	85.64	50.4	29.84	0.5162	0.3038	0.1798	302.5	-1 528c	25 528	Mm					
36 581 16 480	81.82	47.65	31.13	0.5094	0.2966	0.1938	298.1	-1 537c	27 537						
37 588 17 485	74.03	42.56	32.13	0.4977	0.2861	0.216	291.2	-1 547c	29 547						
41 609 18 490	51.01	30.03	32.9	0.4476	0.2635	0.2887	268.6	-1 561c	32 561	min					
-1 495c	19 495	17.49	16.3	33.49	0.2599	0.2422	0.4977	220.5	13 465	34 573					
-1 500c	20 500	17.51	17.49	33.94	0.254	0.2536	0.4922	217.6	13 468	34 573					
-1 509c	21 510	17.58	18.92	34.28	0.2484	0.2672	0.4842	214.3	14 470	34 574					
-1 520c	24 520	18.41	24.91	34.88	0.2354	0.3185	0.446	202.0	15 476	35 577	Bm				
-1 529c	25 530	19.03	27.47	34.99	0.2335	0.3371	0.4293	197.5	15 477	35 578					
-1 539c	27 540	21.0	33.4	35.13	0.2345	0.373	0.3923	188.6	16 480	36 581					
-1 545c	29 545	24.16	40.22	35.18	0.2426	0.4039	0.3533	180.5	16 483	37 585					
-1 550c	30 550	26.27	43.89	35.19	0.2494	0.4165	0.334	176.9	16 484	37 587					
-1 555c	31 555	28.8	47.7	35.19	0.2578	0.427	0.315	173.7	17 485	37 589					
-1 560c	32 560	31.78	51.63	35.19	0.2679	0.4352	0.2967	170.8	17 486	38 592					
380	770	98.46	88.59	31.18	0.4511	0.4059	0.1428	0.0							

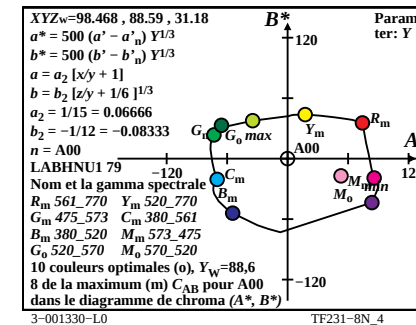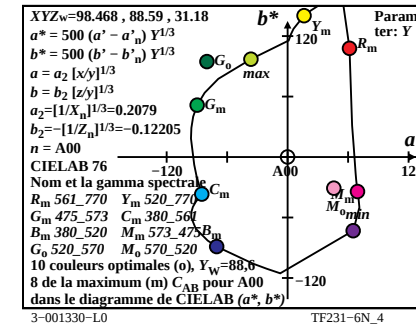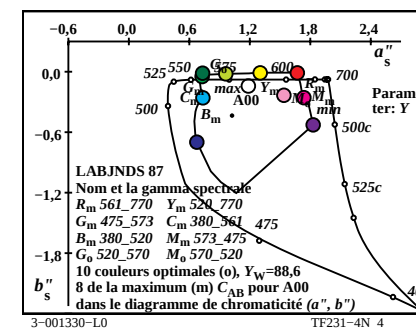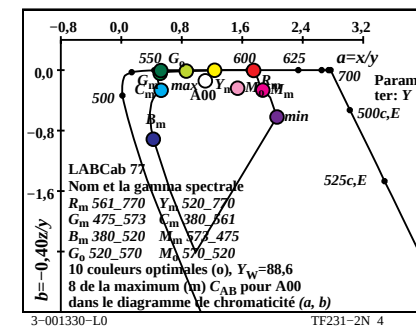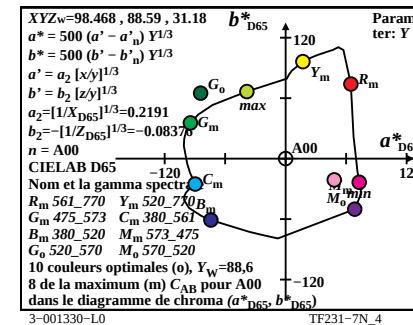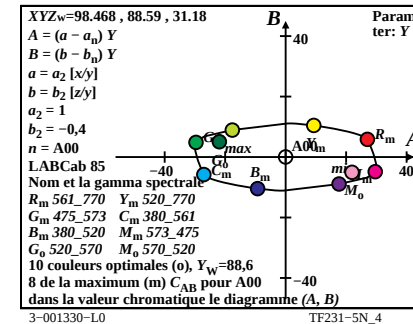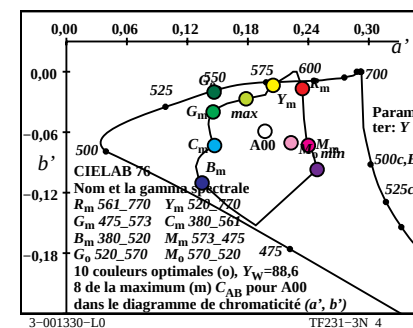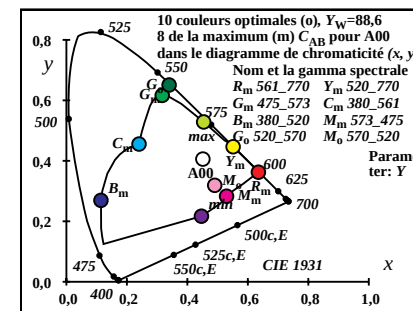









Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour E00, Y _{w,10} =88,6, Y _m =520_770												
i ₁ , λ ₁	i ₂ , λ ₂	X _{88,6}	Y _{88,6}	Z _{88,6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code	
1 405	31 559	28.18	49.32	86.6	0.1717	0.3005	0.5277	191.4	15 477	37 589	Cm	
7 435	32 561	23.26	49.67	58.35	0.1772	0.3783	0.4444	163.8	16 484	-1 484c		
10 450	32 562	20.01	49.98	35.73	0.1893	0.4727	0.3379	135.9	18 493	-1 493c		
12 460	33 565	19.33	50.94	22.54	0.2082	0.5488	0.2429	120.1	21 506	-1 506c		
13 465	33 568	20.25	52.23	17.09	0.2261	0.583	0.1908	113.2	23 515	-1 515c		
13 470	34 572	23.54	55.57	17.09	0.2447	0.5775	0.1776	109.9	24 520	-1 520c		
14 475	36 581	29.38	60.42	12.63	0.2868	0.5897	0.1233	100.2	26 532	-1 532c	Gm	
16 480	40 604	48.47	71.12	6.66	0.3839	0.5632	0.0528	77.5	30 551	-1 551c		
17 485	-1 485c	73.62	81.33	4.79	0.4608	0.5091	0.03	54.0	32 564	11 456		
18 490	-1 490c	73.58	79.94	3.43	0.4688	0.5093	0.0218	52.3	32 564	11 458	max	
19 495	-1 495c	73.57	78.31	2.44	0.4766	0.5074	0.0158	50.5	33 565	12 460		
20 500	-1 500c	73.53	76.43	1.72	0.4847	0.5038	0.0113	48.3	33 566	12 462		
22 510	-1 510c	73.22	71.82	0.84	0.5019	0.4922	0.0057	43.2	33 569	13 466		
23 520	-1 519c	72.86	69.07	0.57	0.5113	0.4846	0.004	40.3	34 570	13 468	Ym	
25 530	-1 529c	71.54	62.84	0.23	0.5314	0.4668	0.0017	33.9	34 573	14 470		
27 540	-1 539c	69.22	55.84	0.07	0.5531	0.4462	0.0006	27.1	35 577	14 473		
29 545	-1 545c	65.78	48.4	0.01	0.576	0.4238	0.0001	20.4	36 582	15 475		
29 550	-1 549c	65.78	48.4	0.01	0.576	0.4238	0.0001	20.4	36 582	15 475		
31 555	-1 555c	61.1	40.83	0.0	0.5993	0.4005	0.0	14.1	37 587	15 476		
32 560	3 415	59.5	37.2	5.75	0.5806	0.3631	0.0562	6.8	39 595	15 478		
31 559	1 405	71.8	50.67	13.4	0.5284	0.3729	0.0986	11.4	37 589	15 477	Rm	
32 561	7 435	76.72	50.32	41.65	0.4547	0.2982	0.2469	343.9	-1 484c	16 484		
32 562	10 450	79.97	50.01	64.27	0.4116	0.2574	0.3308	315.9	-1 493c	18 493		
33 565	12 460	80.66	49.05	77.46	0.3893	0.2367	0.3738	300.1	-1 506c	21 506		
33 568	13 465	79.73	47.76	82.91	0.3789	0.2269	0.394	293.2	-1 515c	23 515		
34 572	13 470	76.44	44.42	82.91	0.3751	0.218	0.4068	289.9	-1 520c	24 520		
36 581	14 475	70.6	39.57	87.37	0.3573	0.2003	0.4422	280.3	-1 532c	26 532	Mm	
40 604	16 480	51.51	28.87	93.34	0.2965	0.1662	0.5372	257.6	-1 551c	30 551		
-1 485c	17 485	26.36	18.66	95.21	0.1879	0.133	0.6789	234.0	11 456	32 564		
-1 490c	18 490	26.4	20.05	96.57	0.1845	0.1402	0.6752	232.4	11 458	32 564	min	
-1 495c	19 495	26.41	21.68	97.56	0.1813	0.1488	0.6697	230.5	12 460	33 565		
-1 500c	20 500	26.45	23.56	98.28	0.1783	0.1588	0.6627	228.4	12 462	33 566		
-1 510c	22 510	26.76	28.17	99.16	0.1736	0.1828	0.6434	223.3	13 466	33 569		
-1 519c	23 520	27.12	30.92	99.43	0.1722	0.1963	0.6314	220.3	13 468	34 570	Bm	
-1 529c	25 530	28.45	37.15	99.77	0.172	0.2246	0.6032	213.9	14 470	34 573		
-1 539c	27 540	30.76	44.15	99.93	0.1759	0.2525	0.5715	207.2	14 473	35 577		
-1 545c	29 545	34.2	51.59	99.99	0.1841	0.2776	0.5382	200.4	15 475	36 582		
-1 549c	29 550	34.2	51.59	99.99	0.1841	0.2776	0.5382	200.4	15 475	36 582		
-1 555c	31 555	38.88	59.16	100.0	0.1963	0.2987	0.5049	194.1	15 476	37 587		
3 415	32 560	40.49	62.79	94.25	0.2049	0.3178	0.4771	186.8	15 478	39 595		
380	770	88.58	88.58	88.59	0.3333	0.3333	0.3333	0.0				

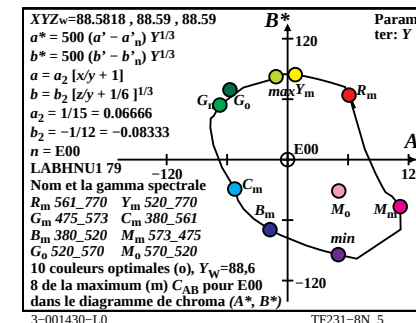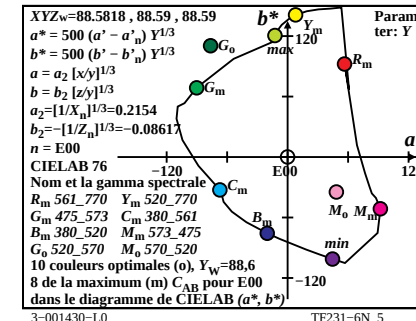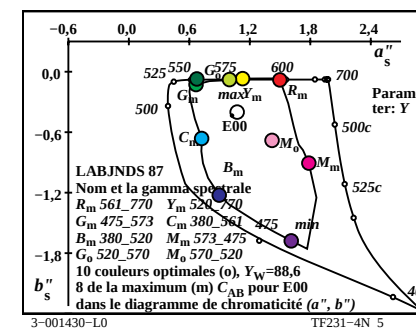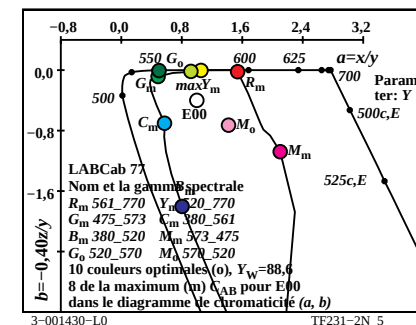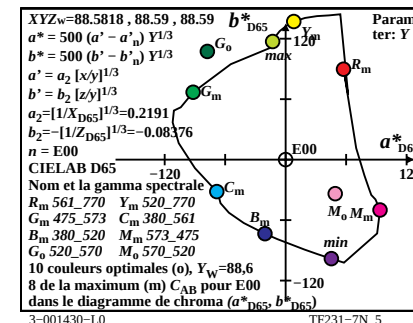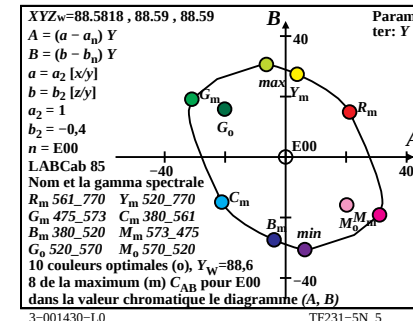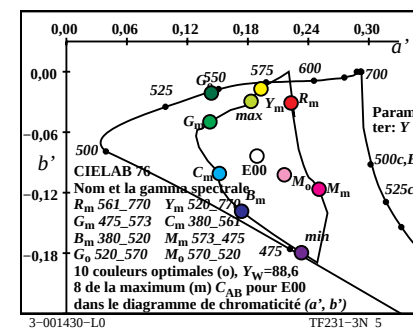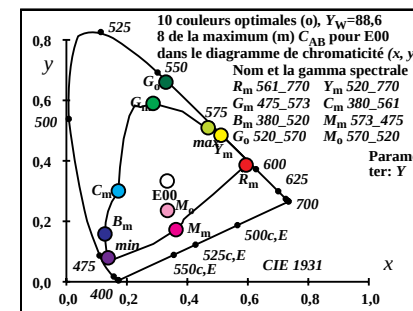

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour C00, Y _{w,10} =88,6, Y _m =520_770															Code
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	max	Ym	min		
1 405 31 556	29.28	49.5	101.47	0.1624	0.2746	0.5629	196.7	15 475	37 586	37 586	Cm				
6 435 31 558	25.71	50.35	79.37	0.1654	0.3239	0.5106	178.0	16 480	44 623	44 623					
9 450 32 560	21.63	50.96	52.26	0.1732	0.4081	0.4185	146.9	17 487	-1 487c	-1 487c					
12 460 32 563	19.07	51.67	27.03	0.1951	0.5284	0.2764	118.8	20 504	-1 504c	-1 504c					
12 465 33 566	21.12	54.03	27.03	0.2066	0.5287	0.2645	116.2	21 507	-1 507c	-1 507c					
13 470 34 572	23.98	57.3	20.34	0.236	0.5638	0.2001	106.8	24 520	-1 520c	-1 520c					
14 475 36 582	31.09	63.12	14.85	0.285	0.5787	0.1362	95.5	26 533	-1 533c	-1 533c	Gm				
16 480 44 622	58.22	76.76	7.52	0.4085	0.5386	0.0527	65.8	31 556	0 403	0 403					
17 485 -1 485c	68.92	79.83	5.25	0.4475	0.5183	0.0341	55.4	32 562	11 456	11 456					
18 490 -1 490c	68.87	78.19	3.64	0.457	0.5188	0.0241	53.7	32 563	11 459	11 459					
19 495 -1 495c	68.86	76.34	2.51	0.4661	0.5168	0.017	51.7	32 564	12 461	12 461					
20 500 -1 500c	68.82	74.3	1.73	0.4751	0.5129	0.0119	49.6	33 565	12 463	12 463					
22 510 -1 510c	68.51	69.61	0.82	0.493	0.5009	0.0059	44.8	33 567	13 466	13 466					
24 520 -1 520c	67.63	64.04	0.37	0.5121	0.485	0.0028	39.4	34 570	13 468	13 468					
26 530 -1 530c	65.87	57.57	0.14	0.5329	0.4658	0.0011	33.3	34 574	14 471	14 471					
28 540 -1 540c	62.96	50.2	0.03	0.5561	0.4434	0.0003	26.8	35 578	14 473	14 473					
28 545 -1 544c	62.96	50.2	0.03	0.5561	0.4434	0.0003	26.8	35 578	14 473	14 473					
29 550 -1 549c	61.02	46.31	0.01	0.5684	0.4314	0.0001	23.5	36 580	14 474	14 474					
31 555 -1 555c	56.12	38.38	0.0	0.5938	0.4061	0.0	17.0	37 585	15 475	15 475					
31 560 9 447	66.32	39.93	51.32	0.4208	0.2533	0.3257	329.3	-1 487c	17 487	17 487					
31 556 1 405	68.0	50.49	14.67	0.5106	0.3791	0.1101	16.6	37 586	15 475	15 475	Rm				
31 558 6 435	71.57	49.64	36.77	0.453	0.3142	0.2327	358.0	44 623	16 480	16 480					
32 560 9 450	75.65	49.03	63.87	0.4012	0.26	0.3387	327.0	-1 487c	17 487	17 487					
32 563 12 460	78.2	48.32	89.11	0.3626	0.2241	0.4132	298.8	-1 504c	20 504	20 504					
33 566 12 465	76.16	45.96	89.11	0.3605	0.2175	0.4218	296.3	-1 507c	21 507	21 507					
34 572 13 470	73.29	42.69	95.8	0.346	0.2015	0.4523	286.9	-1 520c	24 520	24 520					
36 582 14 475	66.19	36.87	101.28	0.3239	0.1804	0.4956	275.6	-1 533c	26 533	26 533	Mm				
44 622 16 480	39.06	23.23	108.62	0.2285	0.1359	0.6355	245.9	0 403	31 556	31 556					
-1 485c 17 485	28.35	20.16	110.89	0.1778	0.1264	0.6956	235.4	11 456	32 562	32 562					
-1 490c 18 490	28.4	21.8	112.5	0.1745	0.134	0.6913	233.7	11 459	32 563	32 563	min				
-1 495c 19 495	28.42	23.65	113.62	0.1715	0.1427	0.6857	231.7	12 461	32 564	32 564					
-1 500c 20 500	28.46	25.69	114.41	0.1688	0.1524	0.6786	229.6	12 463	33 565	33 565					
-1 510c 22 510	28.77	30.38	115.31	0.1649	0.1741	0.6609	224.9	13 466	33 567	33 567					
-1 520c 24 520	29.65	35.95	115.77	0.1634	0.1982	0.6382	219.4	13 468	34 570	34 570	Bm				
-1 530c 26 530	31.41	42.42	116.0	0.1654	0.2234	0.611	213.4	14 471	34 574	34 574					
-1 540c 28 540	34.32	49.79	116.1	0.1714	0.2486	0.5798	206.8	14 473	35 578	35 578					
-1 544c 28 545	34.32	49.79	116.1	0.1714	0.2486	0.5798	206.8	14 473	35 578	35 578					
-1 549c 29 550	36.25	53.68	116.13	0.1759	0.2605	0.5635	203.5	14 474	36 580	36 580					
-1 555c 31 555	41.16	61.61	116.14	0.188	0.2814	0.5305	197.0	15 475	37 585	37 585					
9 447 31 560	30.95	60.06	64.81	0.1986	0.3854	0.4159	149.2	17 487	-1 487c	-1 487c					
380 770 86.18	88.59	102.89	0.3103	0.319	0.3705	0.0									

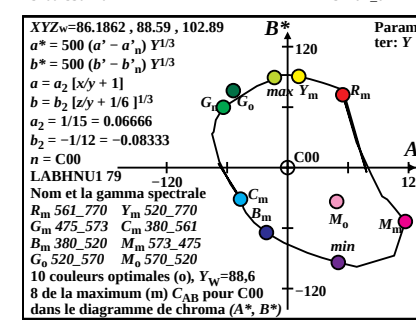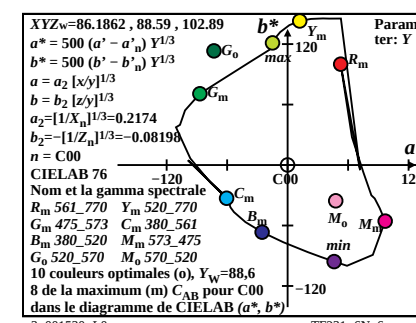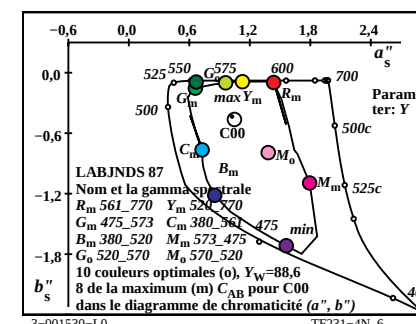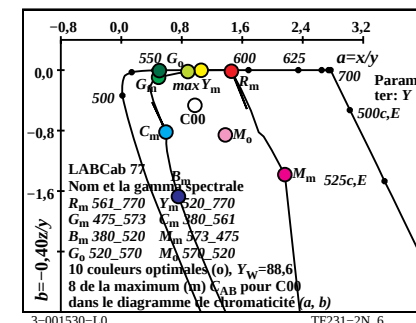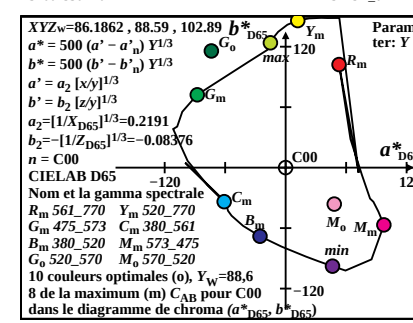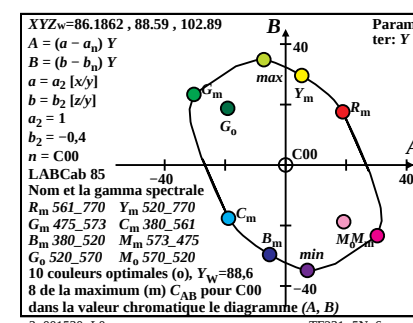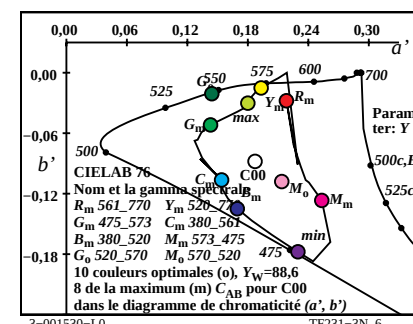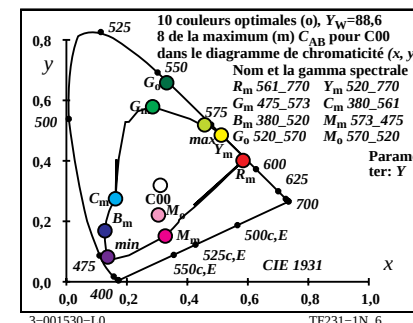

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour P00, Y _{w,10} =88,6, Y _m =520_770													
i ₁ , λ ₁	i ₂ , λ ₂	X _{88,6}	Y _{88,6}	Z _{88,6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code		
0 405	32 562	26.98	48.64	71.34	0.1836	0.3309	0.4854	186.9	15 479	38 591	Cm		
7 435	32 563	23.05	48.91	48.7	0.191	0.4053	0.4035	162.7	17 485	-1 485c			
9 450	32 564	21.55	49.48	36.49	0.2004	0.4601	0.3394	146.1	18 491	-1 491c			
12 460	33 567	20.0	49.93	19.53	0.2235	0.558	0.2183	123.7	21 506	-1 506c			
13 465	33 569	20.73	50.97	14.94	0.2392	0.5882	0.1724	117.2	22 514	-1 514c			
13 470	34 572	23.45	53.65	14.94	0.2547	0.5828	0.1623	114.7	23 518	-1 518c			
15 475	35 579	27.57	56.67	8.21	0.2982	0.6129	0.0888	103.5	26 534	-1 534c	Gm		
16 480	38 593	40.32	64.97	5.99	0.3623	0.5837	0.0538	89.6	29 547	-1 547c			
17 485	-1 485c	78.71	82.48	4.35	0.4754	0.4982	0.0263	51.7	33 566	11 457			
17 490	-1 489c	78.71	82.48	4.35	0.4754	0.4982	0.0263	51.7	33 566	11 457	max		
19 495	-1 495c	78.66	79.78	2.26	0.4894	0.4964	0.014	48.2	33 567	12 461			
19 500	-1 499c	78.66	79.78	2.26	0.4894	0.4964	0.014	48.2	33 567	12 461			
22 510	-1 510c	78.35	73.83	0.8	0.5121	0.4826	0.0052	40.6	34 570	13 467			
23 520	-1 519c	78.01	71.27	0.54	0.5206	0.4756	0.0036	37.6	34 572	13 469	Ym		
26 530	-1 530c	75.76	62.09	0.13	0.549	0.4499	0.0009	27.3	35 577	14 473			
28 540	-1 540c	72.97	55.01	0.03	0.57	0.4297	0.0002	20.2	36 580	15 475			
28 545	-1 544c	72.97	55.01	0.03	0.57	0.4297	0.0002	20.2	36 580	15 475			
29 550	-1 549c	71.13	51.31	0.01	0.5808	0.419	0.0	16.8	36 583	15 476			
31 555	-1 555c	66.45	43.74	0.0	0.603	0.3969	0.0	10.3	37 587	15 478			
32 560	-1 560c	63.56	39.93	0.0	0.6141	0.3858	0.0	7.4	38 590	15 479			
32 562	0 405	75.38	51.35	9.9	0.5516	0.3758	0.0724	6.9	38 591	15 479	Rm		
32 563	7 435	79.31	51.08	32.54	0.4867	0.3134	0.1997	342.7	-1 485c	17 485			
32 564	9 450	80.82	50.51	44.75	0.4589	0.2868	0.2541	326.1	-1 491c	18 491			
33 567	12 460	82.37	50.06	61.71	0.4242	0.2578	0.3178	303.8	-1 506c	21 506			
33 569	13 465	81.63	49.02	66.3	0.4144	0.2488	0.3366	297.3	-1 514c	22 514			
34 572	13 470	78.92	46.34	66.3	0.4119	0.2419	0.3461	294.7	-1 518c	23 518			
35 579	15 475	74.79	43.32	73.04	0.3912	0.2266	0.382	283.5	-1 534c	26 534	Mm		
38 593	16 480	62.05	35.02	75.25	0.36	0.2032	0.4366	269.6	-1 547c	29 547			
-1 485c	17 485	23.65	17.51	76.89	0.2003	0.1483	0.6512	231.8	11 457	33 566			
-1 489c	17 490	23.65	17.51	76.89	0.2003	0.1483	0.6512	231.8	11 457	33 566	min		
-1 495c	19 495	23.7	20.21	78.99	0.1928	0.1644	0.6426	228.2	12 461	33 567			
-1 499c	19 500	23.7	20.21	78.99	0.1928	0.1644	0.6426	228.2	12 461	33 567			
-1 510c	22 510	24.02	26.16	80.45	0.1838	0.2002	0.6158	220.7	13 467	34 570			
-1 519c	23 520	24.35	28.72	80.7	0.182	0.2147	0.6032	217.6	13 469	34 572	Bm		
-1 530c	26 530	26.6	37.9	81.11	0.1826	0.2602	0.557	207.3	14 473	35 577			
-1 540c	28 540	29.39	44.98	81.21	0.1889	0.289	0.5219	200.2	15 475	36 580			
-1 544c	28 545	29.39	44.98	81.21	0.1889	0.289	0.5219	200.2	15 475	36 580			
-1 549c	29 550	31.23	48.68	81.24	0.1938	0.302	0.5041	196.8	15 476	36 583			
-1 555c	31 555	35.92	56.25	81.25	0.2071	0.3243	0.4685	190.4	15 478	37 587			
-1 560c	32 560	38.8	60.06	81.25	0.2154	0.3334	0.451	187.4	15 479	38 590			
380	770	90.69	88.59	71.98	0.3609	0.3525	0.2864	0.0					

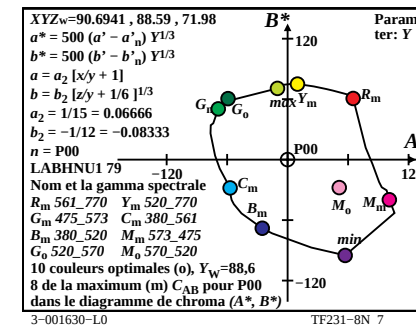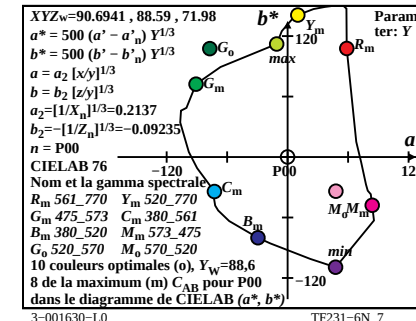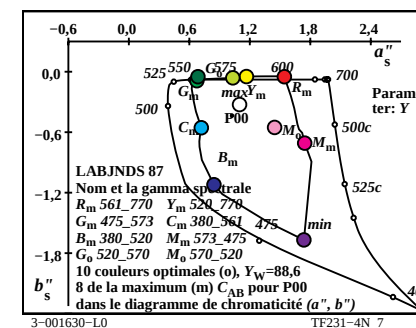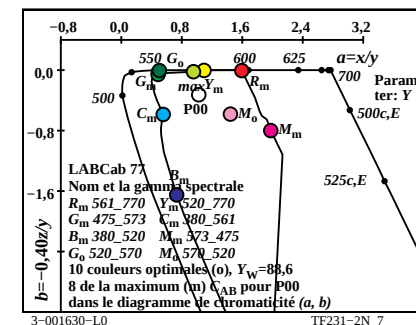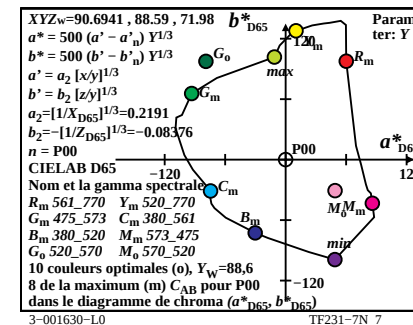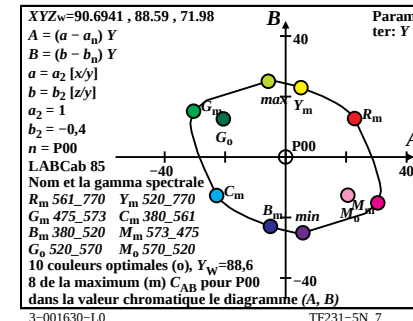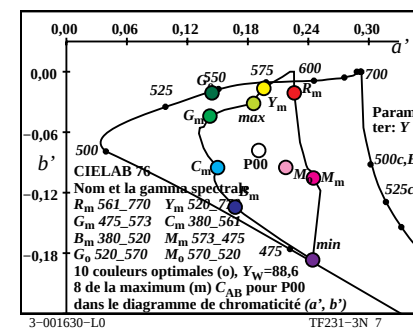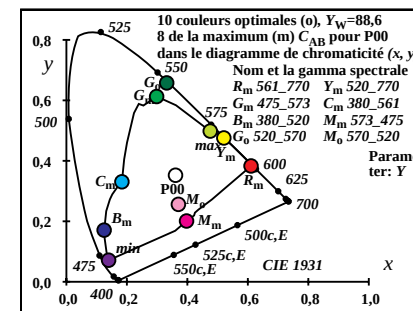









TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, P00, Y_{w,10}=88,6, Parameter: Name

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement

Ostwald couleurs optimales (o) de la maximum (m) C _{AB} pour Q00, Y _{w,10} =88,6, Y _m =520_770													
i ₁ , λ ₁	i ₂ , λ ₂	X _{88.6}	Y _{88.6}	Z _{88.6}	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code		
1 405	31 556	29.63	49.88	102.39	0.1628	0.2742	0.5628	196.1	15 475	37 587	Cm		
7 435	31 558	23.53	50.34	67.82	0.166	0.3553	0.4786	164.7	16 482	-1 482c			
10 450	32 560	19.56	50.73	40.9	0.1759	0.4562	0.3678	133.5	18 493	-1 493c			
12 460	32 563	18.74	51.88	25.5	0.195	0.5396	0.2652	117.0	21 506	-1 506c			
13 465	33 566	19.76	53.44	19.2	0.2138	0.5783	0.2077	109.9	23 515	-1 515c			
13 470	34 572	23.64	57.44	19.2	0.2357	0.5727	0.1914	105.9	24 520	-1 520c			
15 475	36 583	30.52	62.39	10.2	0.296	0.605	0.0989	92.5	27 536	-1 536c	Gm		
15 480	45 629	61.34	79.6	10.2	0.4058	0.5266	0.0674	65.2	31 556	2 413			
17 485	-1 485c	68.63	80.21	5.23	0.4454	0.5206	0.0339	56.2	32 561	11 455			
17 490	-1 489c	68.63	80.21	5.23	0.4454	0.5206	0.0339	56.2	32 561	11 455	max		
18 495	-1 494c	68.58	78.66	3.71	0.4543	0.521	0.0246	54.6	32 562	11 458			
19 500	-1 499c	68.57	76.87	2.62	0.463	0.5191	0.0177	52.7	32 563	12 460			
21 510	-1 509c	68.42	72.48	1.28	0.4812	0.5097	0.009	48.2	33 566	12 464			
24 520	-1 520c	67.23	63.73	0.39	0.5118	0.4851	0.0029	39.7	34 570	13 468	Ym		
26 530	-1 530c	65.35	56.8	0.14	0.5343	0.4644	0.0011	33.2	34 574	14 471			
27 540	-1 539c	64.02	53.11	0.07	0.5462	0.4531	0.0006	29.9	35 576	14 472			
29 545	-1 545c	60.52	45.54	0.01	0.5705	0.4293	0.0001	23.3	36 581	14 474			
30 550	-1 550c	58.34	41.75	0.0	0.5828	0.4171	0.0	20.1	36 583	15 475			
30 555	-1 554c	58.34	41.75	0.0	0.5828	0.4171	0.0	20.1	36 583	15 475			
31 560	9 447	67.0	39.61	55.74	0.4126	0.2439	0.3433	325.1	-1 488c	17 488			
31 556	1 405	68.01	50.11	16.03	0.5069	0.3735	0.1194	16.0	37 587	15 475	Rm		
31 558	7 435	74.11	49.65	50.6	0.425	0.2847	0.2902	344.7	-1 482c	16 482			
32 560	10 450	78.08	49.26	77.51	0.3811	0.2404	0.3783	313.6	-1 493c	18 493			
32 563	12 460	78.9	48.11	92.92	0.3587	0.2187	0.4224	297.0	-1 506c	21 506			
33 566	13 465	77.88	46.55	99.22	0.3482	0.2081	0.4436	289.9	-1 515c	23 515			
34 572	13 470	74.0	42.55	99.22	0.3429	0.1972	0.4598	285.9	-1 520c	24 520			
36 583	15 475	67.12	37.6	108.22	0.3151	0.1766	0.5081	272.6	-1 536c	27 536	Mm		
45 629	15 480	36.3	20.39	108.22	0.2201	0.1236	0.6561	245.2	2 413	31 556			
-1 485c	17 485	29.01	19.78	113.19	0.1791	0.1221	0.6987	236.2	11 455	32 561			
-1 489c	17 490	29.01	19.78	113.19	0.1791	0.1221	0.6987	236.2	11 455	32 561	min		
-1 494c	18 495	29.06	21.33	114.7	0.176	0.1292	0.6947	234.6	11 458	32 562			
-1 499c	19 500	29.07	23.12	115.79	0.173	0.1376	0.6892	232.7	12 460	32 563			
-1 509c	21 510	29.22	27.51	117.13	0.168	0.1582	0.6736	228.3	12 464	33 566			
-1 520c	24 520	30.41	36.26	118.03	0.1646	0.1963	0.639	219.7	13 468	34 570	Bm		
-1 530c	26 530	32.29	43.19	118.28	0.1666	0.2229	0.6104	213.3	14 471	34 574			
-1 539c	27 540	33.62	46.88	118.34	0.1691	0.2357	0.5951	209.9	14 472	35 576			
-1 545c	29 545	37.12	54.45	118.41	0.1767	0.2593	0.5639	203.3	14 474	36 581			
-1 550c	30 550	39.3	58.24	118.42	0.1819	0.2697	0.5483	200.2	15 475	36 583			
-1 554c	30 555	39.3	58.24	118.42	0.1819	0.2697	0.5483	200.2	15 475	36 583			
9 447	31 560	30.64	60.38	62.67	0.1993	0.3928	0.4077	145.0	17 488	-1 488c			
380	770	86.5	88.59	104.91	0.3089	0.3163	0.3746	0.0					

3-001730-L0

TF230-7N_8

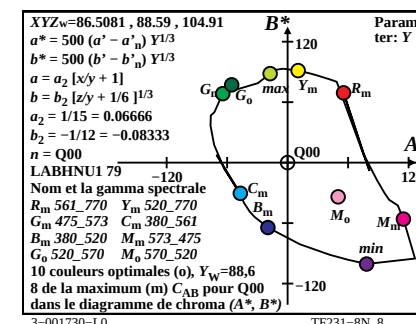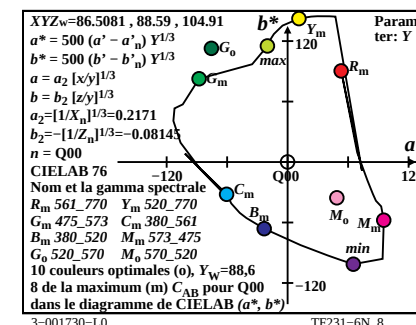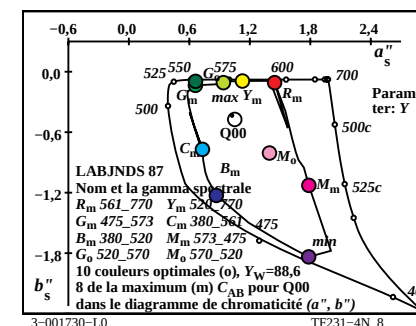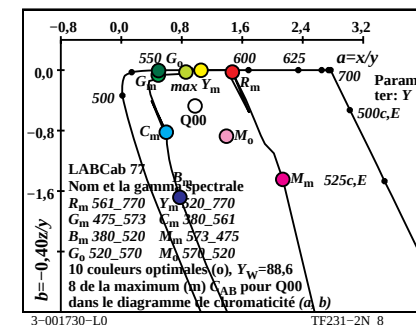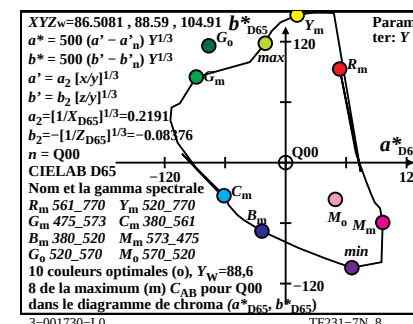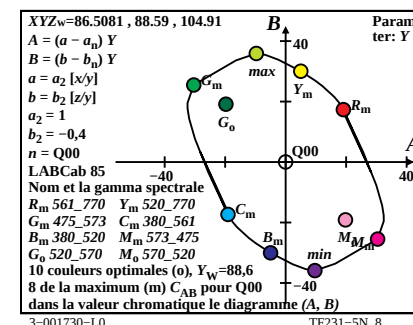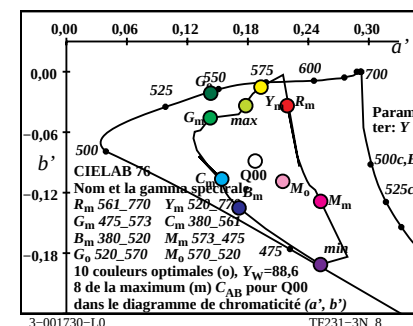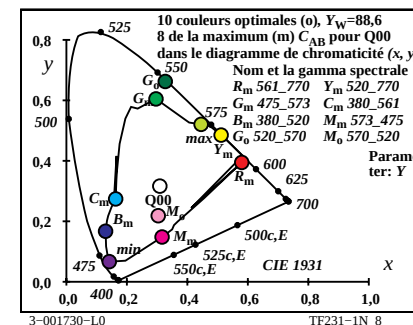

TUB-test graphique TF23; maximum C_{AB}, Y_m=520_770
XYZ, xyz, h data, Q00, Y_{w,10}=88,6, Parameter: Name

entrée: w/rgb/cmyk -> w/rgb/cmyk-
sortie: aucun changement