




TF770-3, Fig. C1Wd: Élément A: étoile de Siemens $N-W$, $W-N$, $N-Z$ et $W-Z$; PS opérateur : *rgb/cmy0*

TF770-5, Fig. C2Wd: Élément B: 5 paliers de gris L^* équidistante + $N0$ + $W1$; PS opérateur : *rgb/cmy0*

TF770-7, Fig. C3Wd: Élément C: 16 paliers de gris L^* équidistante; PS opérateur : *rgb/cmy0*

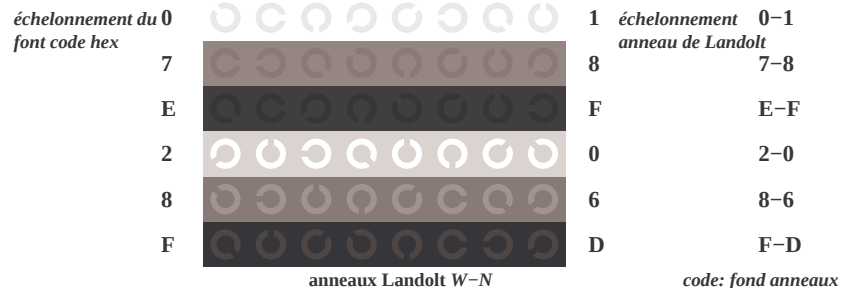

TF771-1, Fig. C4Wd: Élément D: anneaux Landolt W-N; PS opérateur : *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
	largeur de trame in lpi																

TF771-3, Fig. C5Wd: Élément E: trame linéaire à 45° (ou 135°); PS opérateur : *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

largeur de trame in lpi

TF771-5, Fig. C6Wd: Élément F: trame linéaire à 90° (ou 0°); PS opérateur : *rgb/cmy0*