


http://farbe.li.tu-berlin.de/TI73/TI73L0NP.PDF /.PS; Output di trasferimento
N: nessuna linearizzazione 3D (OL) nel file (F) o PS-startup (S), pagine 2/2

vedi file simili: http://farbe.li.tu-berlin.de/TI73/TI73L0NP.PDF /.PS
informazioni tecniche: http://www.ps.bam.de o http://130.149.60.45/~farbmeterik

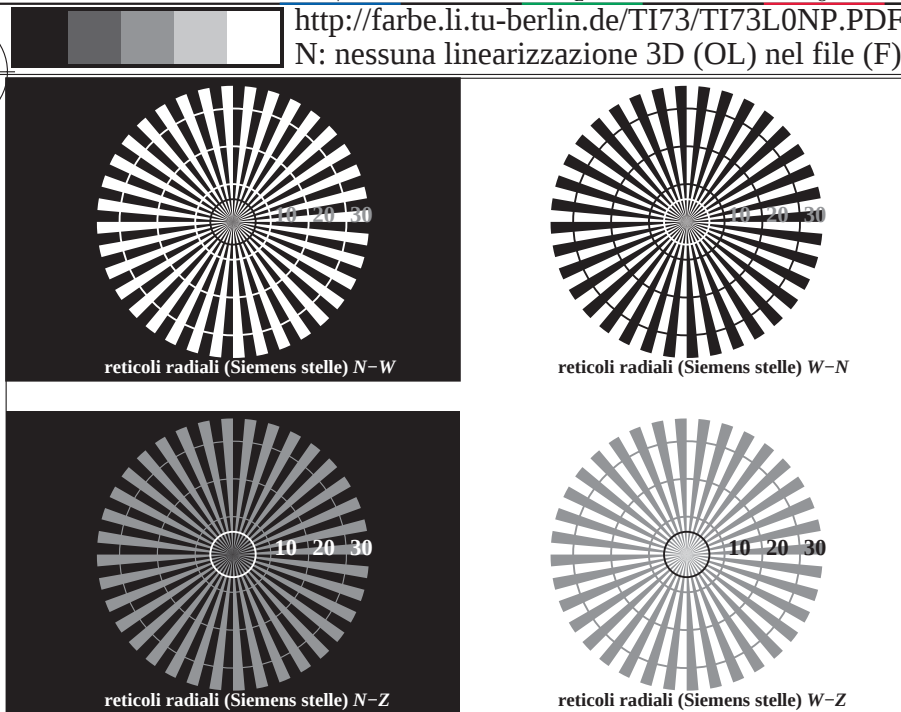

TI730-3, Fig. C1We: Elemento A: reticoli radiali N-W, W-N, N-Z i W-Z; PS operator: *rgb/cmy0*

$L^*/Y_{immettere}$ (assoluta)	18.0/2.5	37.3/9.7	56.7/24.6	76.1/49.9	95.4/88.6	N_0 (min.)	W_1 (max.)
$w^*=L^*_{CIELAB, r}$ (relativo)							
$w^*_{immettere}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

TI730-5, Fig. C2We: Elemento B: 5 equidistante L^* grigio passi + N_0 + W_1 ; PS operator: *rgb/cmy0*

$L^*/Y_{immettere}$ (assoluta)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.3	69.6/40.2	74.8/47.9	79.9/56.5	85.1/66.2	90.2/76.8	95.4/88.6
N. e codice Hex	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=L^*_{CIELAB, r}$ (relativo)																
$w^*_{immettere}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

TI730-7, Fig. C3We: Elemento C: 16 equidistante L^* grigio passi; PS operator: *rgb/cmy0*

$L^*/Y_{immettere}$ (assoluta)	18.0/2.5	37.3/9.7	56.7/24.6	76.1/49.9	95.4/88.6
N. e codice Hex	00;F	01;E	02;D	03;C	04;B
$w^*=L^*_{CIELAB, r}$ (relativo)					
$w^*_{immettere}$	0,000	0,250	0,500	0,750	1,000

Grafico TUB-TI73; ME16(ISO 9241-306) & 3(ISO/IEC 15775)
Tavola dei colori acromatici N, 3D=0, de=1, cmyk

Input: *rgb/cmyk* -> *rgb_e*
Output: trasferire a *cmyk_e*

lo sfondo passo codice esadecimale	0	7	E	2	8	F
anelli di Landolt W-N						
1 anello passo codice esadecimale	0-1	7-8	E-F	2-0	8-6	F-D
codice: sfondo-anello passo						

TI731-1, Fig. C4We: Elemento D: anelli di Landolt W-N; PS operator: *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
diametro linea raster in lpi																	

TI731-3, Fig. C5We: Elemento E: Linea raster a 45° (o 135°) gradi; PS operator: *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
diametro linea raster in lpi																	

TI731-5, Fig. C6We: Elemento F: Linea raster a 90° (o 180°) gradi; PS operator: *rgb/cmy0*

$L^*/Y_{immettere}$ (assoluta)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.3	69.6/40.2	74.8/47.9	79.9/56.5	85.1/66.2	90.2/76.8	95.4/88.6
$w^*=L^*_{CIELAB, r}$ (relativo)																
$w^*_{immettere}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000