
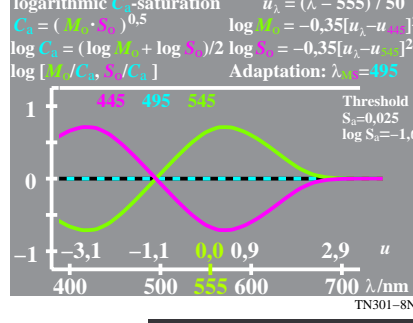
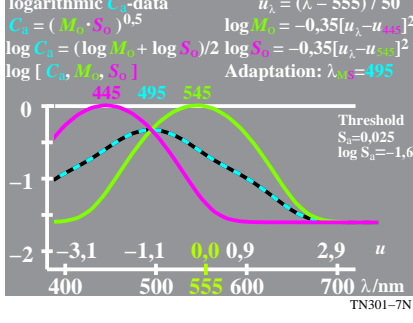
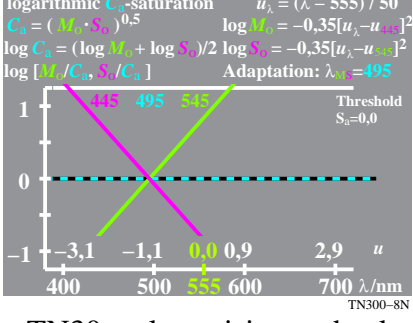
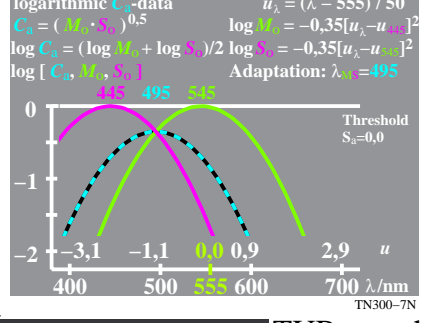
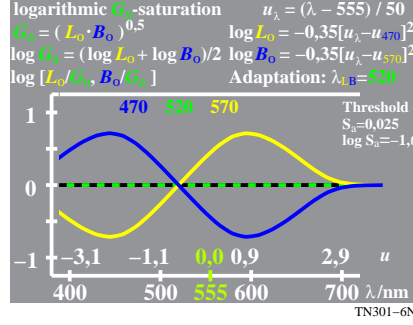
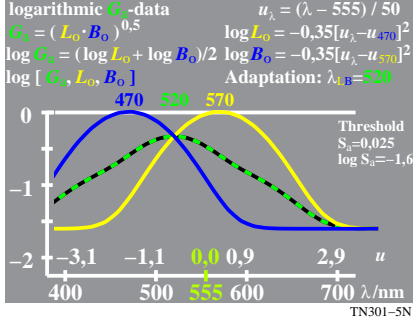
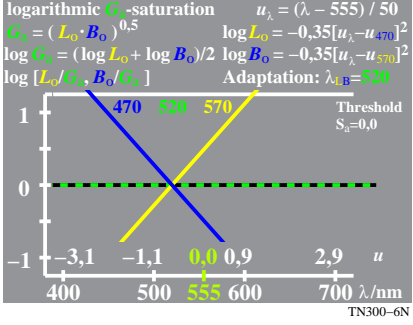
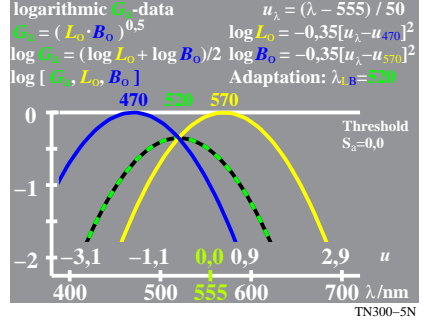
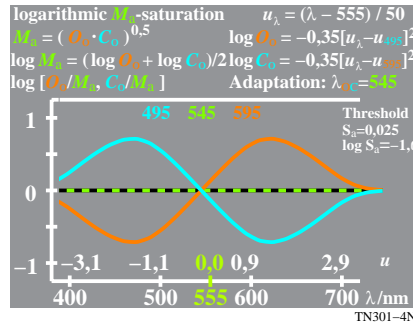
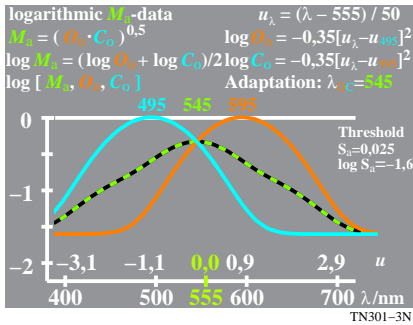
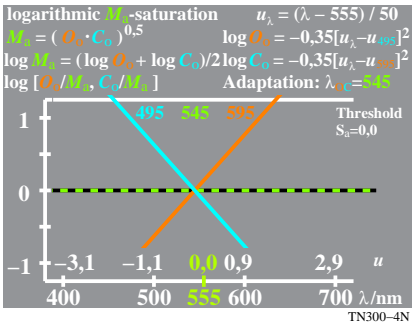
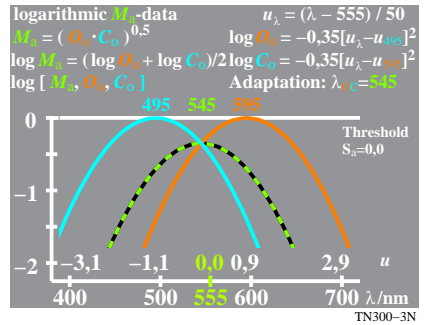
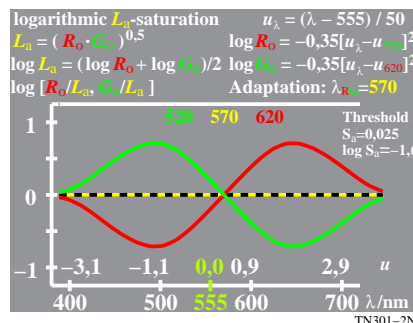
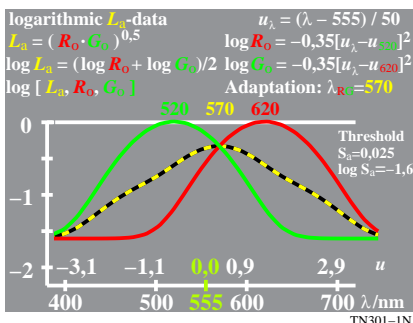
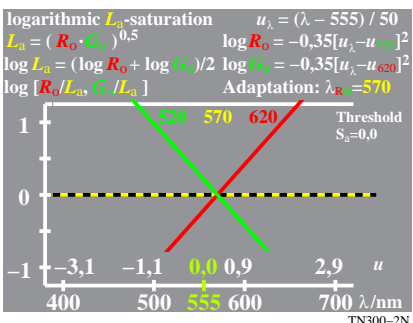


see similar files: http://130.149.60.45/~farbmetrik/TN30/TN30.HTM  
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201-TN30/TN30LONP.PDF /PS  
application for measurement of display output  
TUB material: code=rh4ta

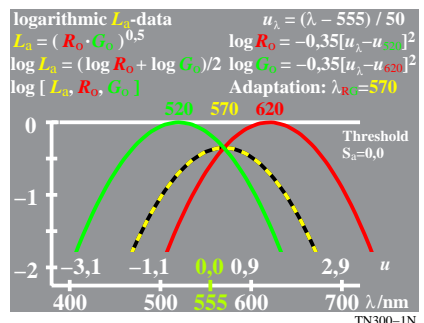

TUB-test chart TN30; colour vision and colorimetry cone sensitivity and saturation for distance  $\Delta\lambda=100$

input: w/rgb/cmyk -> w/rgb/cmyk-  
output: no change compared

