


L^*/Y_{input} (absolutt)	18.0/2.5	37.3/9.7	56.7/24.6	76.1/49.9	95.4/88.6	N_0 (min.)	W_1 (max.)
$W^*=L^*_{\text{CIELAB}, r}$ (relativ)							
W^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

L^*/Y_{input}	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.3	69.6/40.2	74.8/47.9	79.9/56.5	85.1/66.2	90.2/76.8	95.4/88.6
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$W^*=I^*_{\text{CIELAB}, r}$																
(relativ)																
W^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

5-003130-F0







	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


rasterbredde i lpi

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
	rasterbredde i lpi																


TN701-5, Figur C6Wd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*

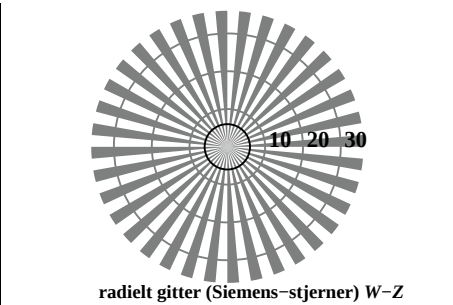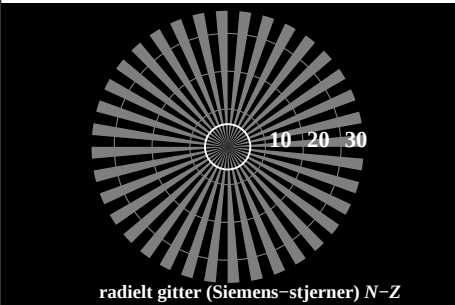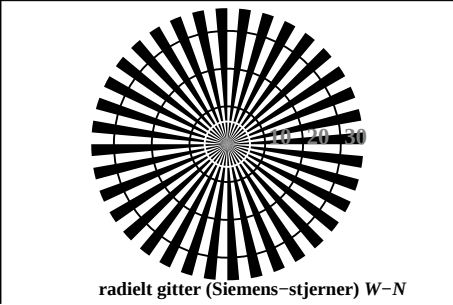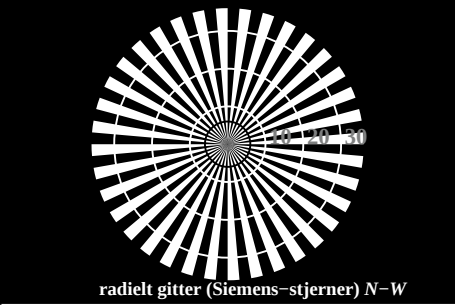


TN700-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

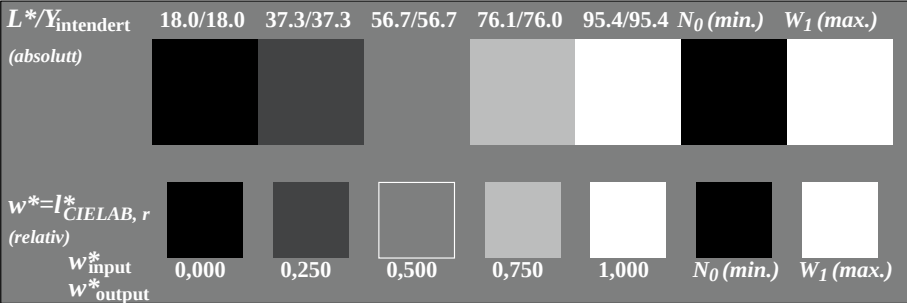


TN700-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0*

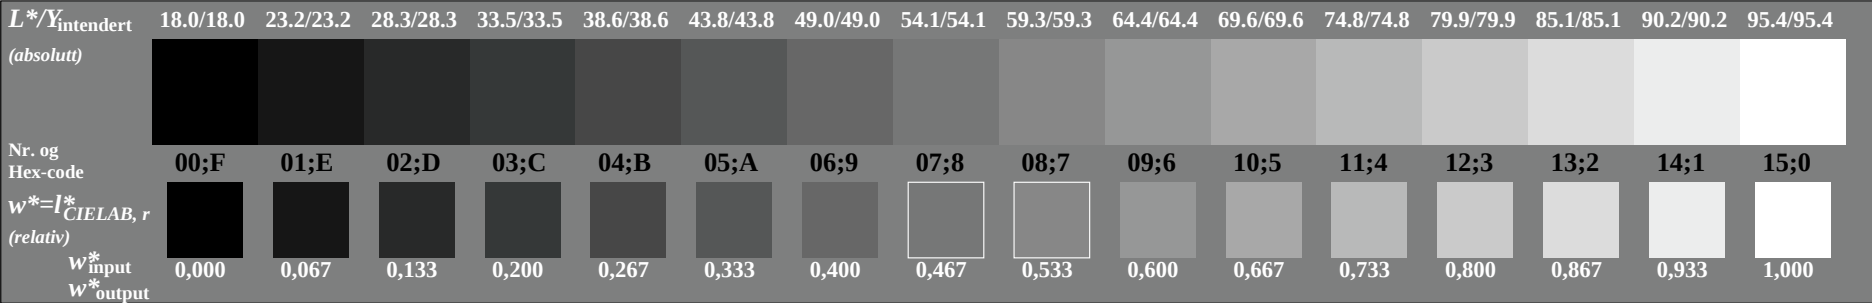


TN700-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0*

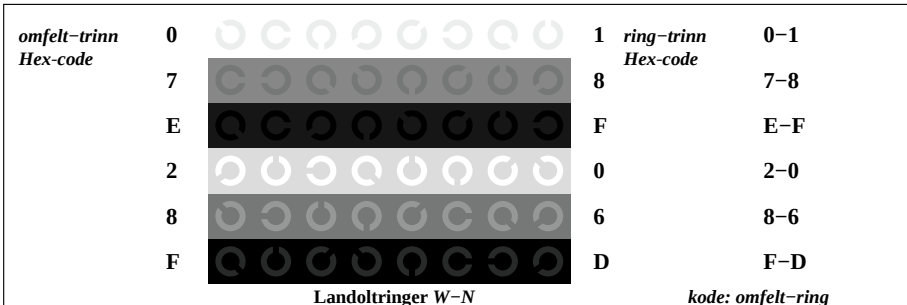





TN701-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

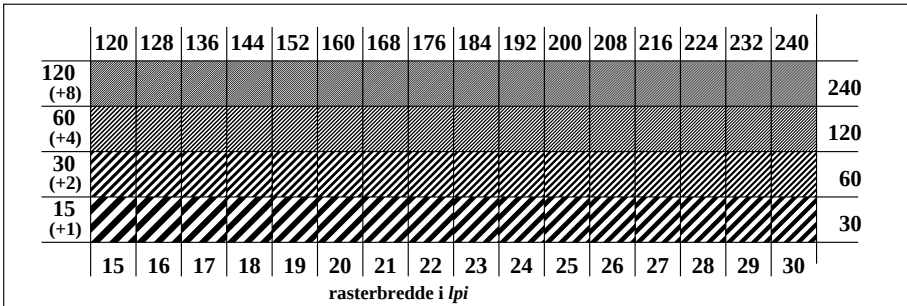

TN701-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

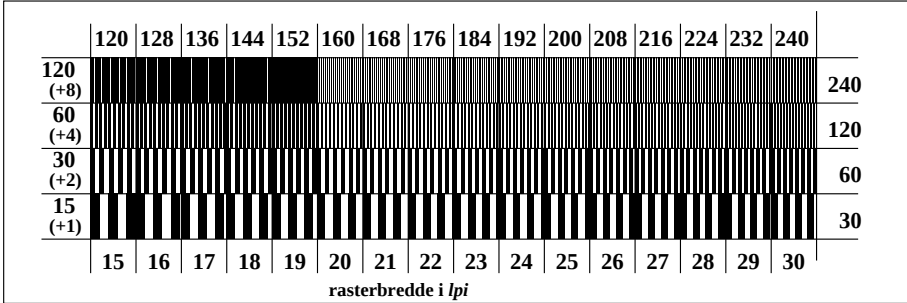


TN701-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*



$L^*/Y_{\text{intendert}}$ (absolutt)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
$W^*=I^*_{\text{CIELAB}, r}$ (relativ)							
W^*_{input} W^*_{output}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

$L^*/Y_{\text{intendert}}$ (absolutt)	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$W^*=L^*_{CIE\text{LAB}, r}$ (relativ)																
W^*_{input} W^*_{output}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

5-113130-F0



	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
	rasterbredde i lpi																

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
	rasterbredde i lpi																

TN701-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*