



http://130.149.60.45/~farbmetrik/TN73/TN73L0FP.PDF /.PS; 3D-linearisering
F: 3D-linearisering TN73/TN73LJ30FP.DAT i fil (F), side 2/2

se lignende filer: <http://130.149.60.45/~farbmetrik/TN73/TN73L0FP.PDF> /PS
teknisk informasjon: <http://www.ps.bam.de> eller <http://130.149.60.45/~farbmetrik>


TUB registrering: 20150901-TN73/TN73L0FP.PDF /.PS
anvendelse for måling av offsetrykk output, separasjon cmyk* (CMYK)
TUB-material: code=rha4ta

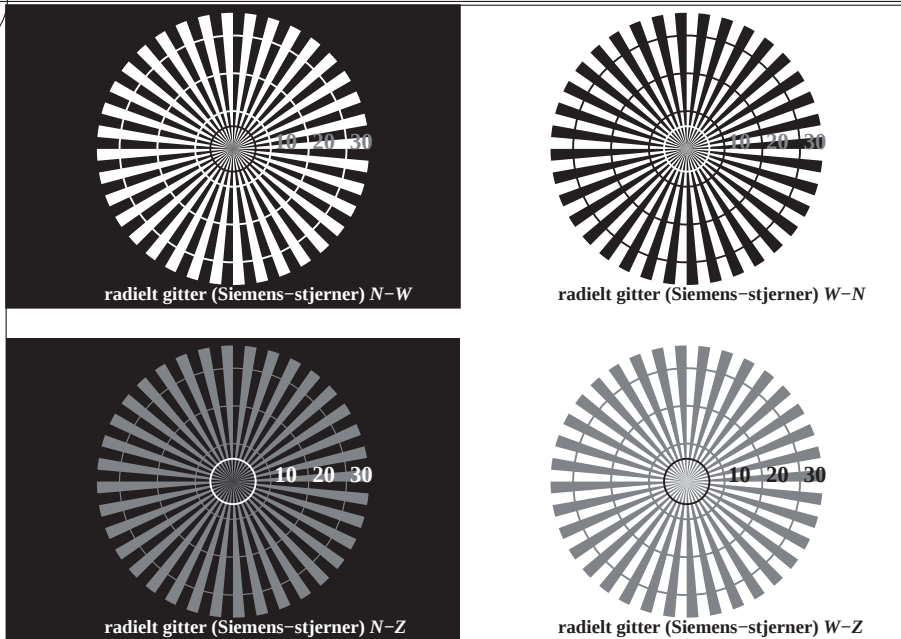


TN730-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

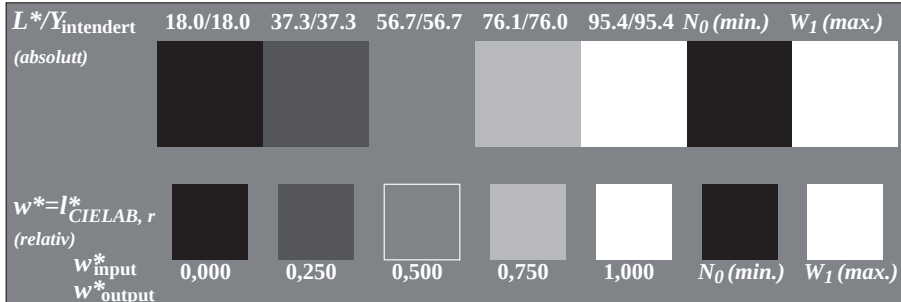


TN730-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0*

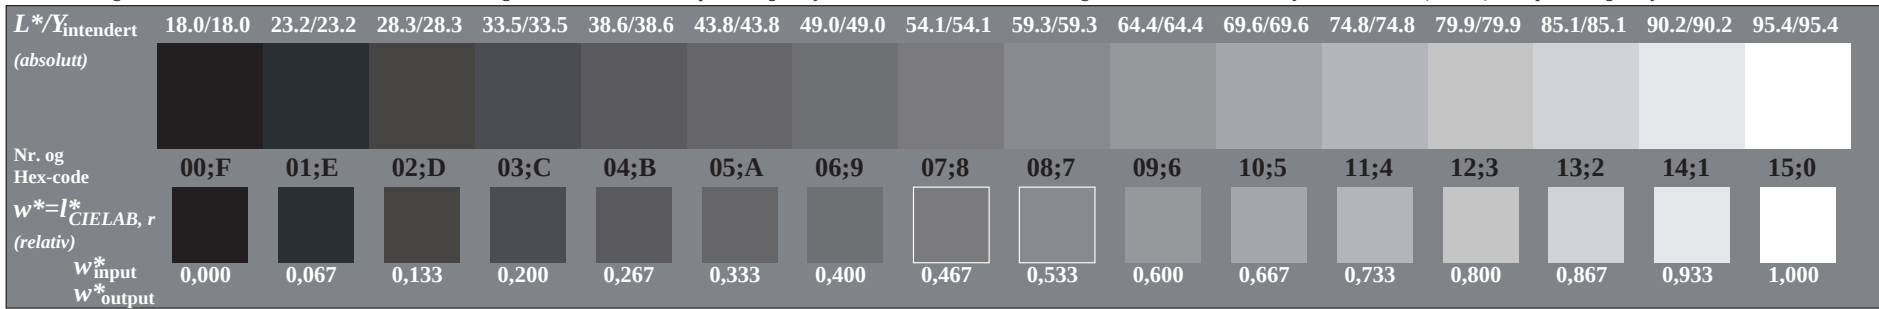


TN730-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0*

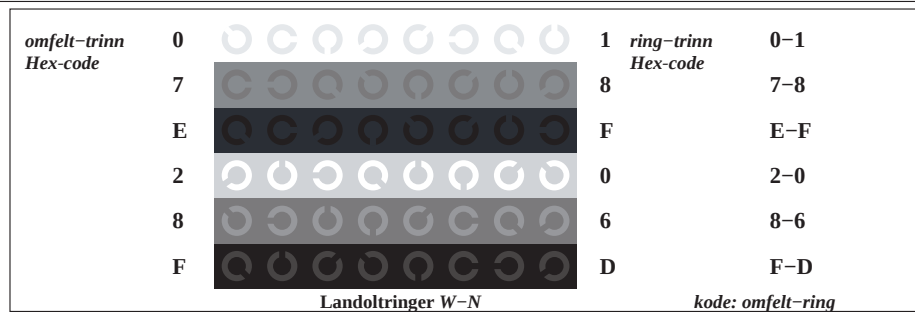

TN731-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

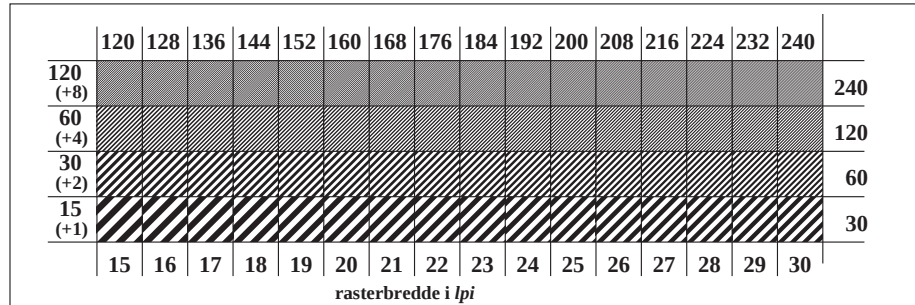

TN731-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

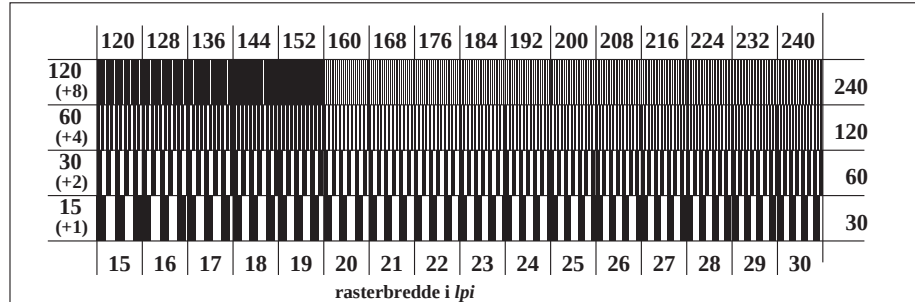

TN731-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*