




radiell gitter (Siemens-stjerner) N-W



radiell gitter (Siemens-stjerner) W-N




radiell gitter (Siemens-stjerner) N-Z




radiell gitter (Siemens-stjerner) W-Z

TN740-3, Figur C1W--: Element A: Radiell gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

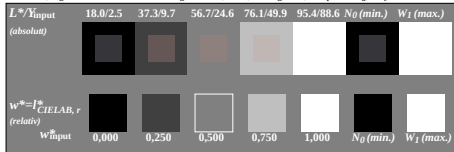


TN740-5, Figur C2W--: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: rgb/cmy0

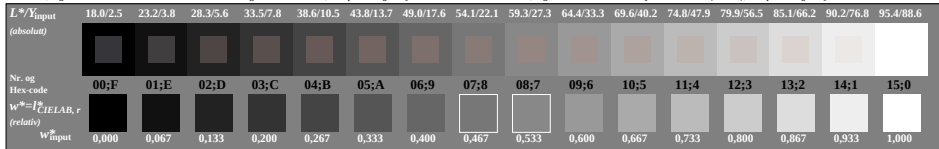

TN740-7, Figur C3W--: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: rgb/cmy0


prøveplansje TN74; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: rgb/cmyk -> rgb/cmyk
akromatisk prøveplansje N output: ingen endring

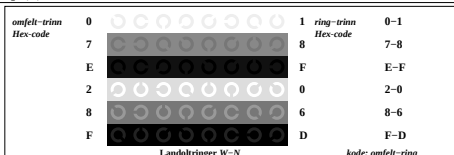

Landoltringer W-N


kode: omfelt-ring

TN741-1, Figur C4W--: Element D: Landoltringer W-N; PS operator: rgb/cmy0

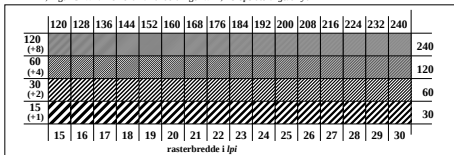

rasterbredde i lpi

TN741-3, Figur C5W--: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

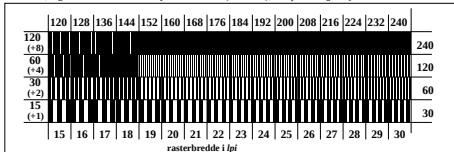

rasterbredde i lpi

TN741-5, Figur C6W--: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0