



http://130.149.60.45/~farbmetrik/TN76/TN76L0FP.PDF /.PS; 3D-linearisering
F: 3D-linearisering TN76/TN76LJ30FP.DAT i fil (F), side 2/2

se lignende filer: <http://130.149.60.45/~farbmetrik/TN76/TN76L0FP.PDF> /PS
teknisk informasjon: <http://www.ps.bam.de> eller <http://130.149.60.45/~farbmetrik>


TUB registrering: 20150901-TN76/TN76L0FP.PDF /.PS
anvendelse for måling av offsettrykk output, separasjon cmyk* (CMY0)
TUB-material: code=rha4ta

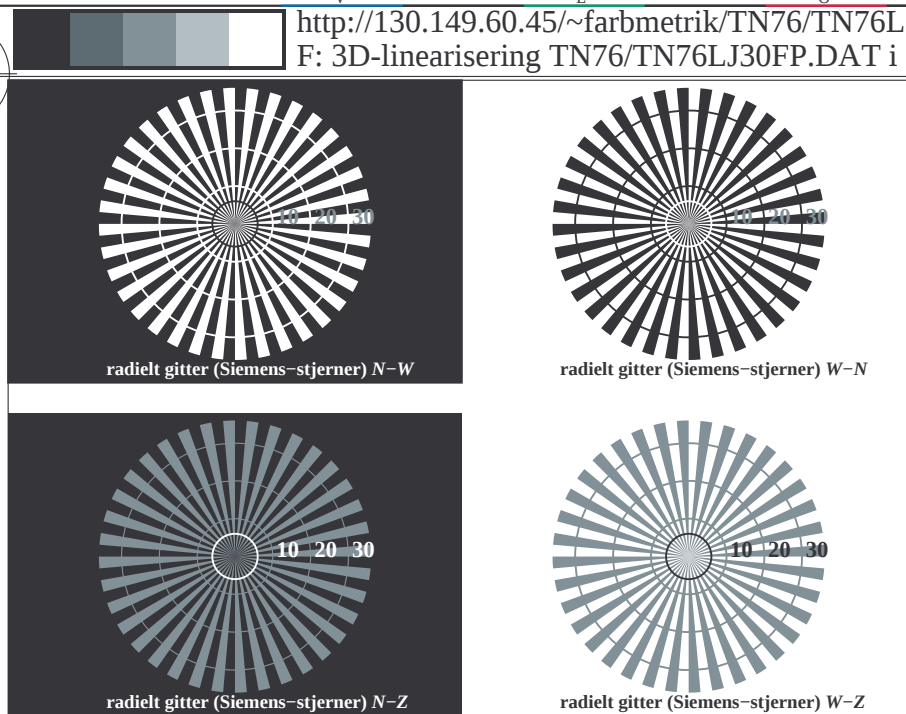


TN760-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

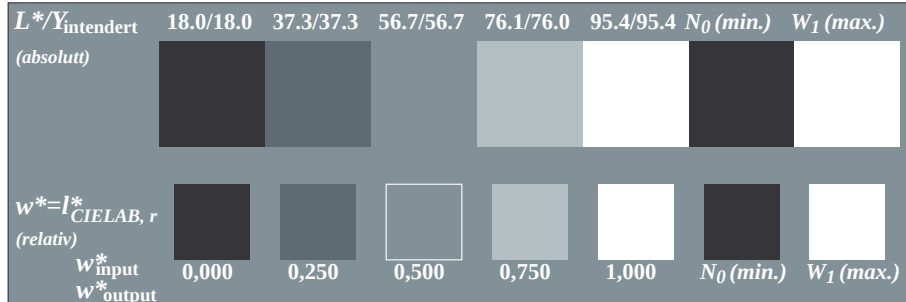


TN760-5, Figur C2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0*

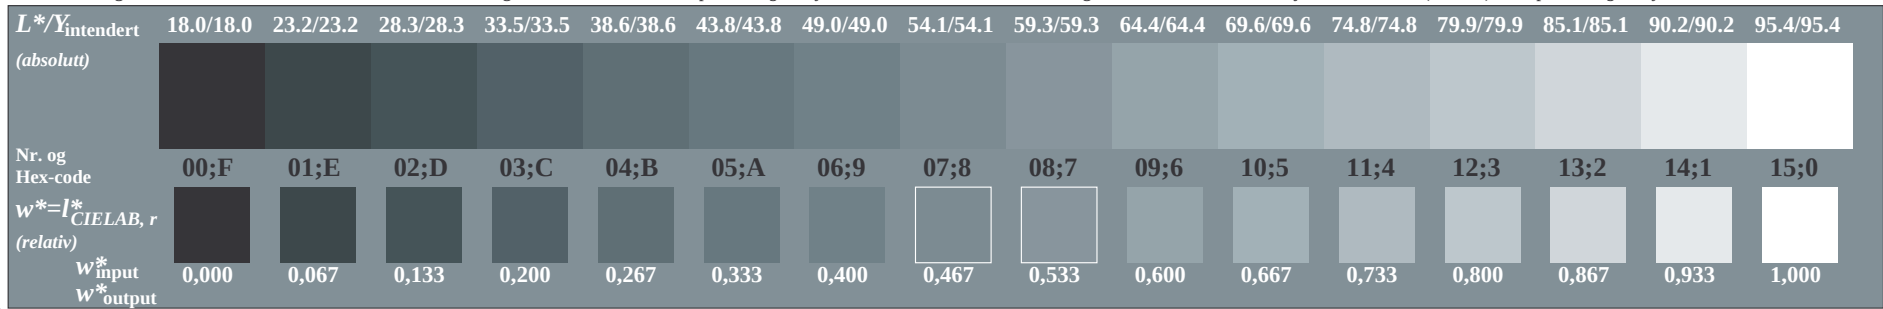


TN760-7, Figur C3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0*

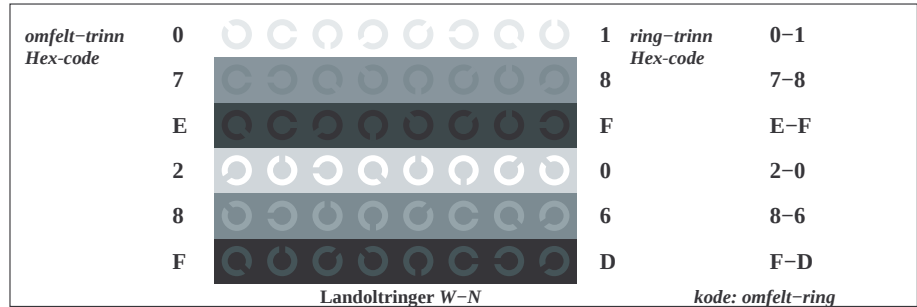

TN761-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

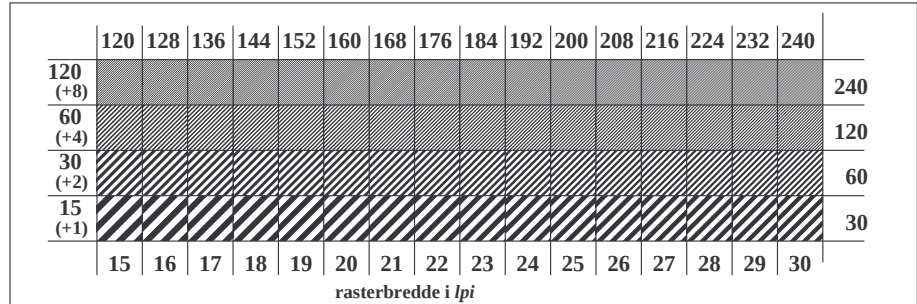

TN761-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

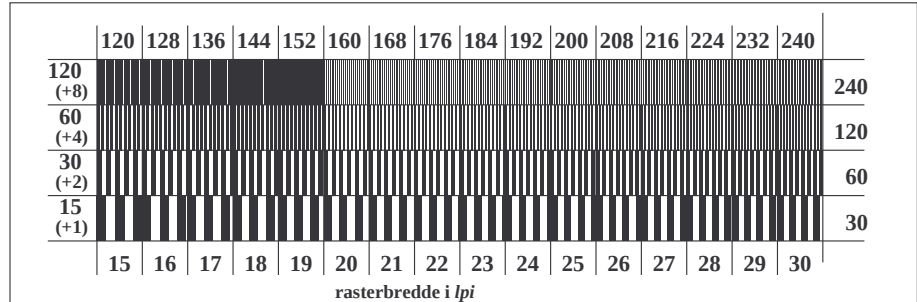

TN761-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*