






http://130.149.60.45/~farbmeterik/TN76/TN76L0N1.TXT /PS; start output
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 1/1


se liggende filer: <http://130.149.60.45/~farbmeterik/TN76/TN76L0N1.TXT>
teknisk informasjon: <http://www.ps-barnde.com> eller <http://130.149.60.45/~farbmeterik>



TN760-3, Figur C1W--: Element A: Radiell gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

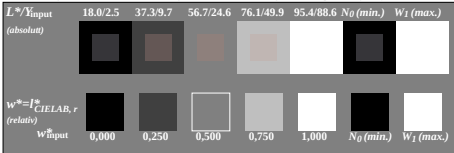


TN760-5, Figur C2W--: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: rgb/cmy0

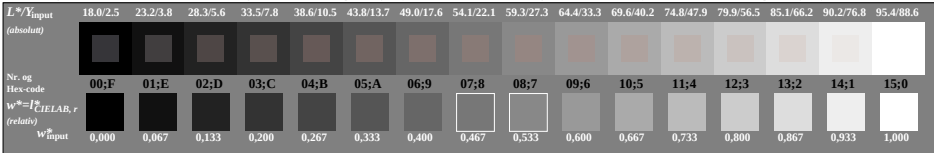


TN760-7, Figur C3W--: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: rgb/cmy0

prøveplansje TN76; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: rgb/cmyk -> rgb/cmyk
akromatisk prøveplansje N output: ingen endring

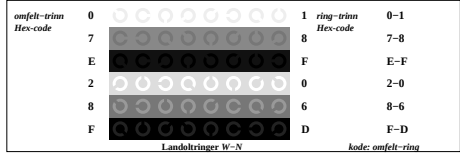


Landoltringer W-N kode: omfelt-ring

TN761-1, Figur C4W--: Element D: Landoltringer W-N; PS operator: rgb/cmy0

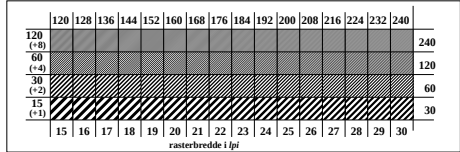

TN761-3, Figur C5W--: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

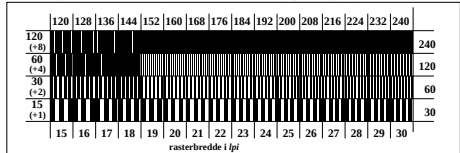

TN761-5, Figur C6W--: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0

TUB registrering: 20150901-TN76/TN76L0N1.TXT /PS
anvendelse for måling av offsettrykk output

TUB-material: code=rha4a