

	$L^*/Y_{intendert}$ (absolutt)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
$w^*-l^*_CIELAB, r$ (relativ)								
w^*_input	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)	
w^*_output								


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: $rgb/cm y 0$

	$L^*/Y_{intendert}$ (absolutt)	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
Nr. og Hex-code		00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*-l^*_CIELAB, r$ (relativ)																	
w^*_input	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000	
w^*_output																	


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $rgb/cm y 0$

<i>omfelt-trinn</i>	0															
<i>Hex-code</i>	7															
	E															
	2															
	8															
	F															


TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: $rgb/cm y 0$

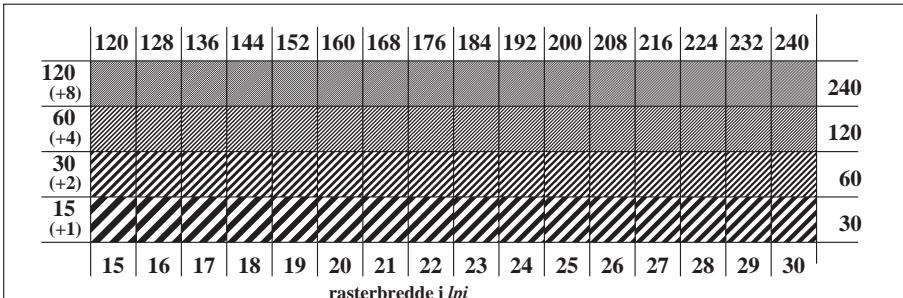

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: $rgb/cm y 0$

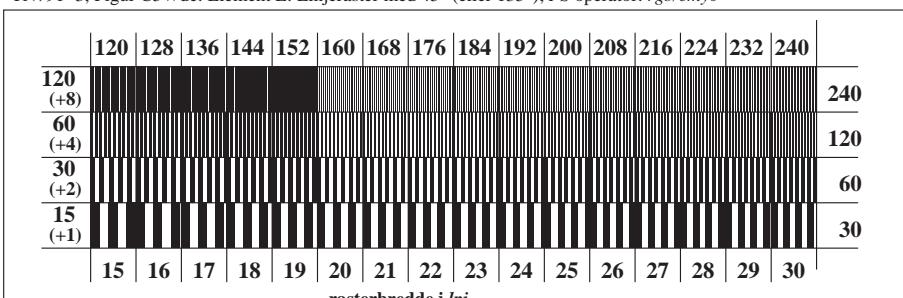

TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: $rgb/cm y 0$

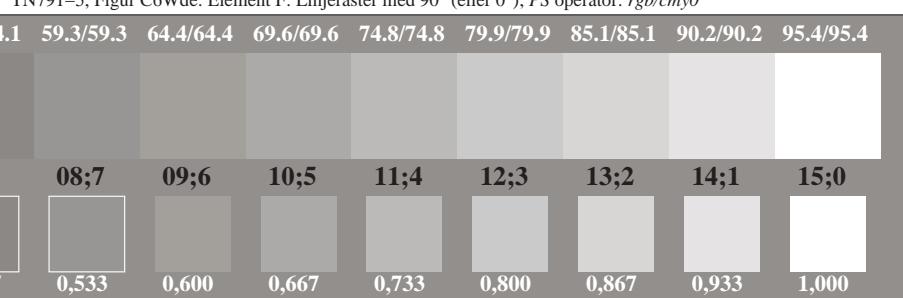

TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $rgb/cm y 0$