

log ΔL Leuchtdichte-Differenz- $\bullet L_g=630\text{cd/m}^2$
 renzschwelle

04 26s A 630cd/m^2 ; hyp2

$$\Delta L = A_1 \cdot A_2 \cdot A_3 \cdot L^t / (L^t + A_2)^2$$

$$A_1=164.8$$


$$A_2=67.24$$

$$A_3=0.8=t$$

$$A_6=8866.0$$

$$A_7=192.6$$

$$\Delta=5.9$$

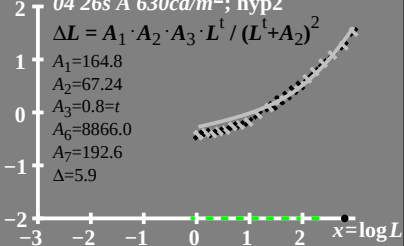

$\log(L/\Delta L)$ Leuchtdichte-Kontrast
Empfindlichkeitsschwelle

04 26s A 630cd/m²; hyp2

$$\log(L/\Delta L) = A_1 \cdot A_2 \cdot t \cdot L / (L^t \cdot A_3 \cdot A_6 \cdot A_7 \cdot \Delta)$$

$$A_1 = 164.8$$


$$A_2 = 67.24$$

$$A_3 = 0.8 = t$$

$$A_6 = 8866.0$$

$$A_7 = 192.6$$

$$\Delta = 5.9$$

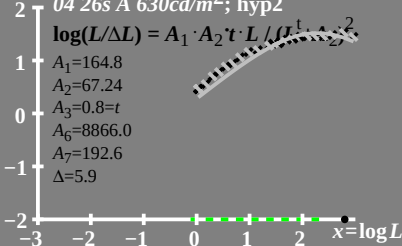

$L/\Delta L$ Leuchtdichte-Kontrast- $\bullet L_g = 630 \text{ cd/m}^2$
 Empfindlichkeitsschwelle g

04 26s A 630 cd/m^2 ; hyp2

$$L/\Delta L = A_1 \cdot A_2 \cdot t \cdot L / (L^t + A_2)^2$$

$$A_1 = 164.8$$


$$A_2 = 67.24$$

$$A_3 = 0.8 = t$$

$$A_6 = 8866.0$$

$$A_7 = 192.6$$

$$\Delta = 5.9$$

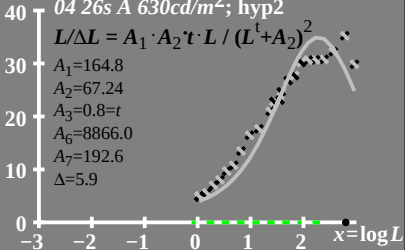

T^* Leuchtdichte-Differenz-
renzschwellensumme

• $L_g = 630 \text{ cd/m}^2$

80 04 26s A 630 cd/m^2 ; hyp2

$$T^* = A_1 \cdot L^t / (L^t + A_2)$$

60 $A_1 = 164.8$

$A_2 = 67.24$

40 $A_3 = 0.8 = t$

$A_6 = 8866.0$

$A_7 = 192.6$

$\Delta = 5.9$

0
-3 -2 -1 0 1 2 $x = \log L$