

log ΔL Leuchtdichte-Differenz- • $L_g=630\text{cd/m}^2$
 renzschwelle

04 26s A&R 630cd/m^2 ; hyp2

$$\Delta L = A_1 \cdot A_2 \cdot A_3 \cdot L^t / (L^t + A_2)^2$$

$$A_1=143.7 \quad A_1=143.5$$


$$A_2=135.3 \quad A_2=30.88$$

$$A_3=0.8=t \quad A_3=0.8=t$$

$$A_6=15550.0 \quad A_6=3544.0$$

$$A_7=461.6 \quad A_7=72.78$$

$$\Delta=0.518 \quad \Delta=0.518$$

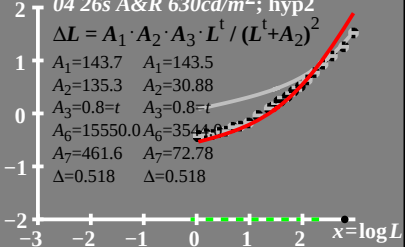

$\log(L/\Delta L)$ Leuchtdichte-Kontrast
Empfindlichkeitsschwelle

04 26s A&R 630cd/m^2 ; hyp2

$$\log(L/\Delta L) = A_1 \cdot A_2 \cdot t \cdot L / (L_0^t \cdot A_3 \cdot A_6 \cdot A_7 \cdot \Delta)$$

$$A_1 = 143.7 \quad A_1 = 143.5$$


$$A_2 = 135.3 \quad A_2 = 30.68$$

$$A_3 = 0.8 = t \quad A_3 = 0.8 = t$$

$$A_6 = 15550.0 \quad A_6 = 3544.0$$

$$A_7 = 461.6 \quad A_7 = 72.78$$

$$\Delta = 0.518 \quad \Delta = 0.518$$

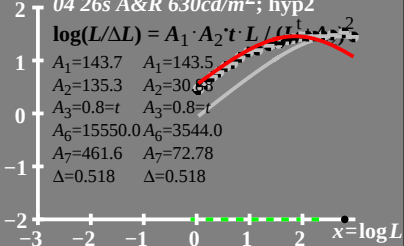

$L/\Delta L$ Leuchtdichte-Kontrast- • $L_g = 630 \text{ cd/m}^2$
Empfindlichkeitsschwelle

04 26s A&R 630 cd/m^2 ; hyp2

$$L/\Delta L = A_1 \cdot A_2 \cdot t \cdot L / (L^t + A_2)^2$$

$$A_1 = 143.7 \quad A_1 = 143.5$$


$$A_2 = 135.3 \quad A_2 = 30.88$$

$$A_3 = 0.8 = t \quad A_3 = 0.8 = t$$

$$A_6 = 15550.0 \quad A_6 = 3544.0$$

$$A_7 = 461.6 \quad A_7 = 72.78$$

$$\Delta = 0.518 \quad \Delta = 0.518$$

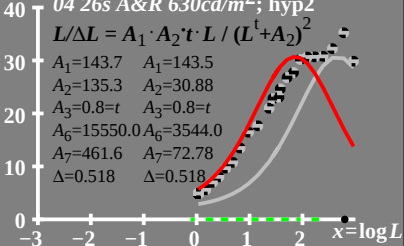

T^* Leuchtdichte-Differenz- renzschwellensumme

04 26s A&R 630cd/m²; hyp2

$$T^* = A_1 \cdot L^t / (L^t + A_2)$$

$$A_1 = 143.7 \quad A_1 = 143.5$$

$$A_2 = 135.3 \quad A_2 = 30.88$$

$$A_3 = 0.8=t \quad A_3 = 0.8=t$$

$$A_6 = 15550.0 \quad A_6 = 3544.0$$

$$A_7 = 461.6 \quad A_7 = 72.78$$

$$\Delta = 0.518 \quad \Delta = 0.518$$

$$\bullet L_s = 630 \text{cd/m}^2$$

