



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmkyolor*

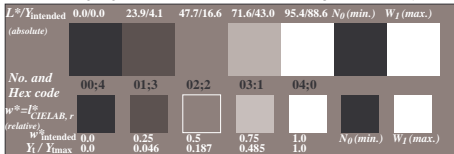


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0 + W_1$ ; PS operator: *cmY0\* setcmkyolor*

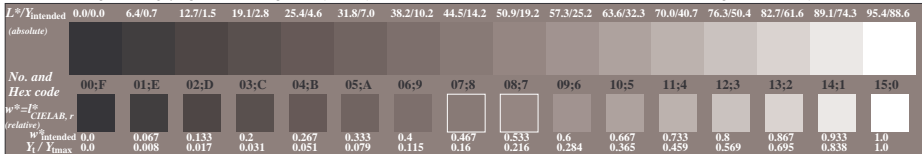


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmkyolor*


ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$   
 Ergonomics – Visual Displays – Field Assessment Methods

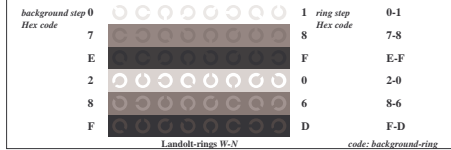

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmkyolor*

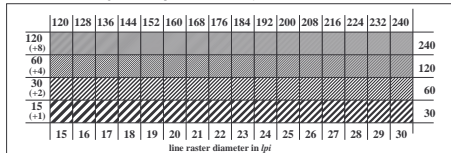

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmkyolor*

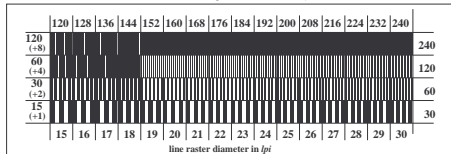

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmkyolor*

input: *nnn0\* setcmkyolor*  
 output: no change compared to input