



See for similar files: <http://www.ps.bam.de/CE70/>  
 Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=0.0, CIEXYZ, 0.5 exp


BAM registration: 20040101-CE70/10S/S70E00NP.PS/.PDF BAM material: code=rh4ta  
 Application for achromatic display output with CIE LAB contrast range  $L^*_w:L^*_n = 95.4 : 18.0$

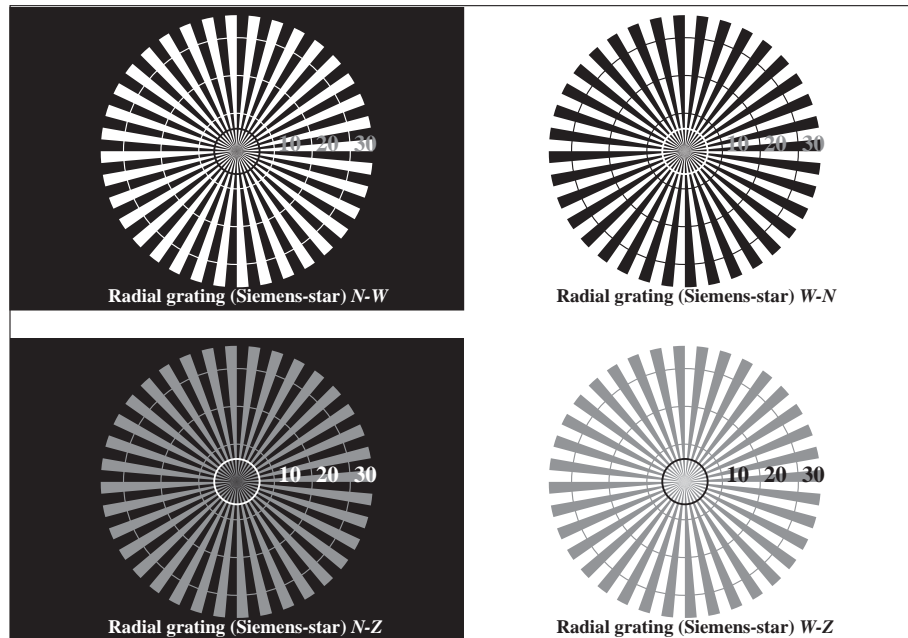

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmykcolor

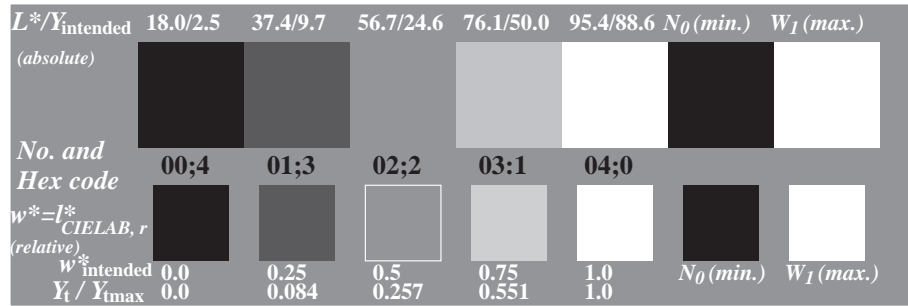


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: 000n\* setcmykcolor

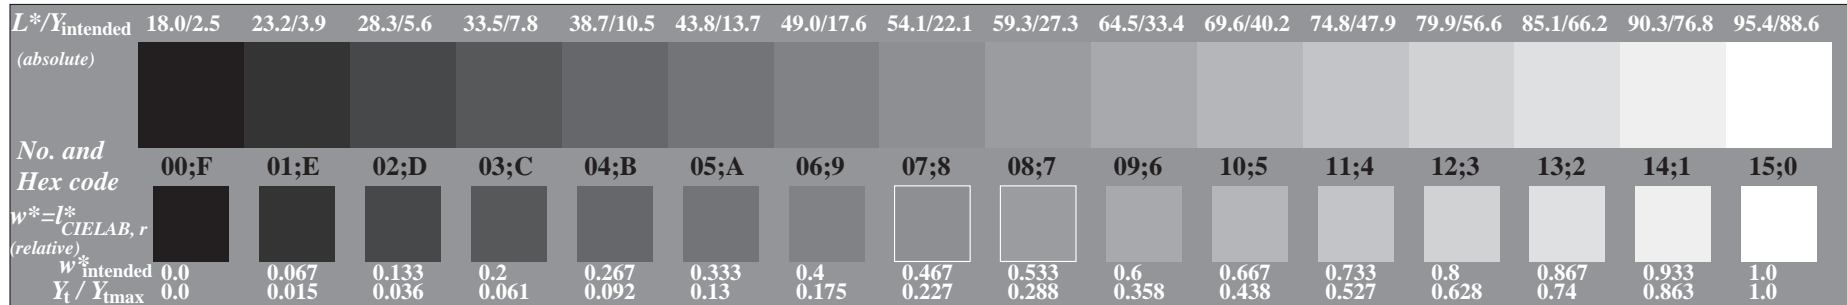


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: 000n\* setcmykcolor

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 2.5$   
 Ergonomics – Visual Displays – Field Assessment Methods


input: 000n\* setcmykcolor  
 output: no change compared to input

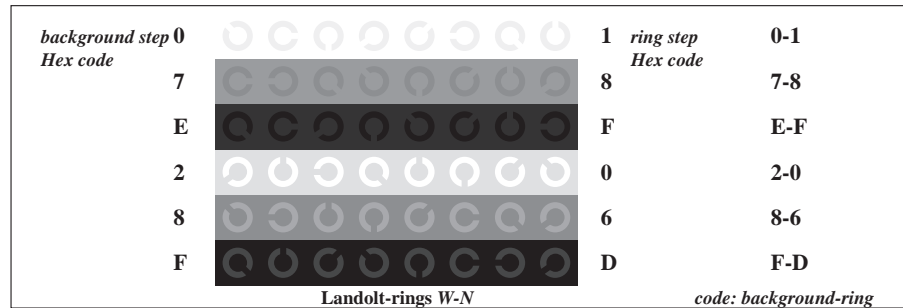

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmykcolor

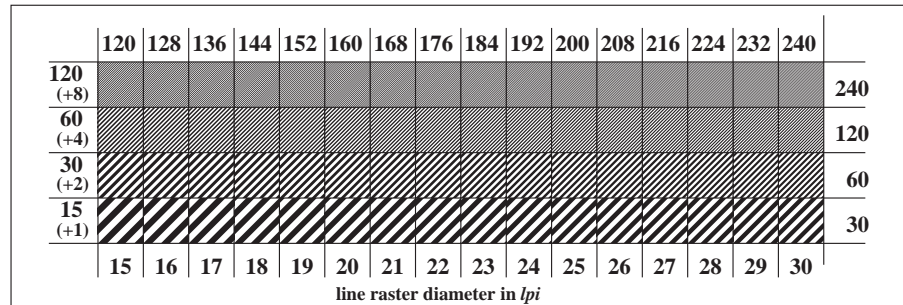

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmykcolor

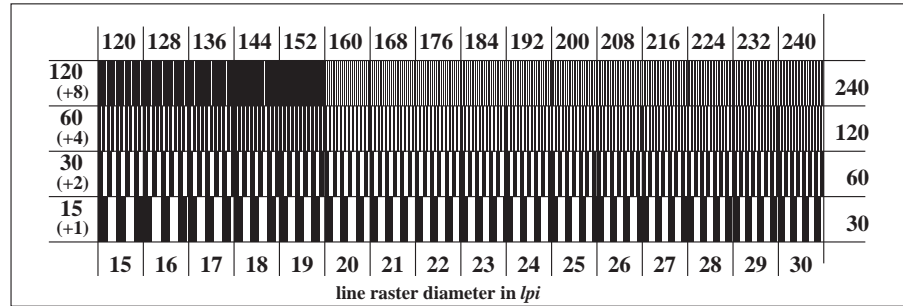

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmykcolor

