




Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $000n^*$  setcmykcolor

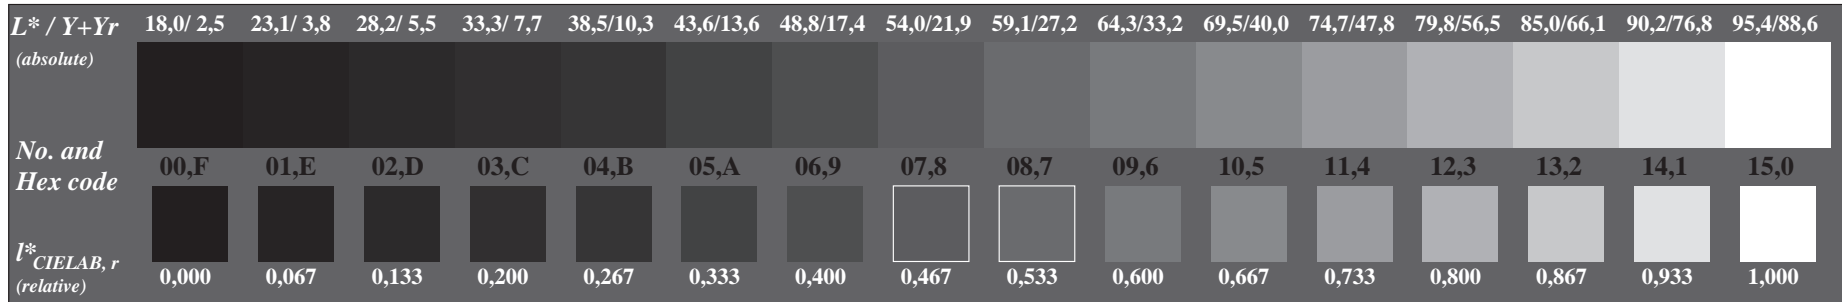

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $w^*$  setgray

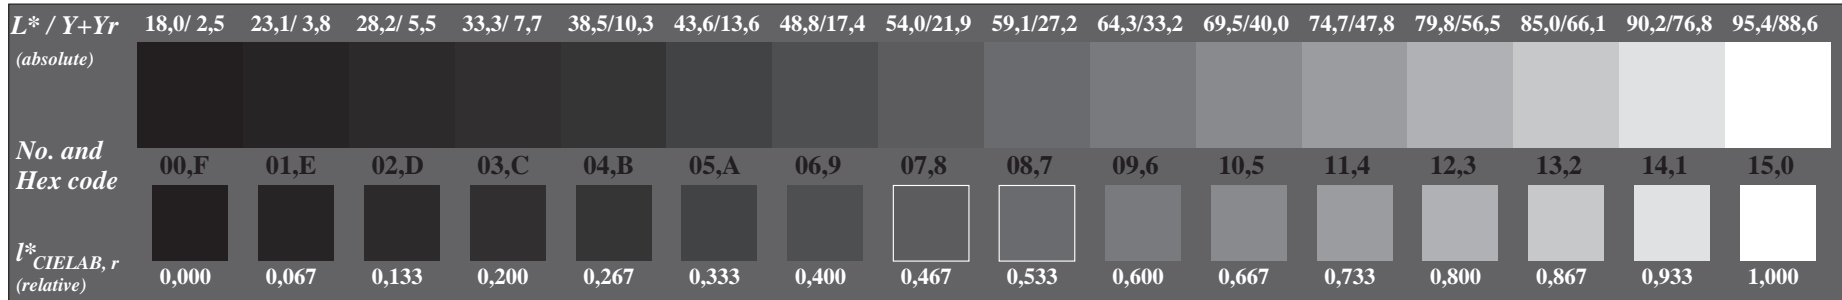

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $nmn0^*$  setcmykcolor

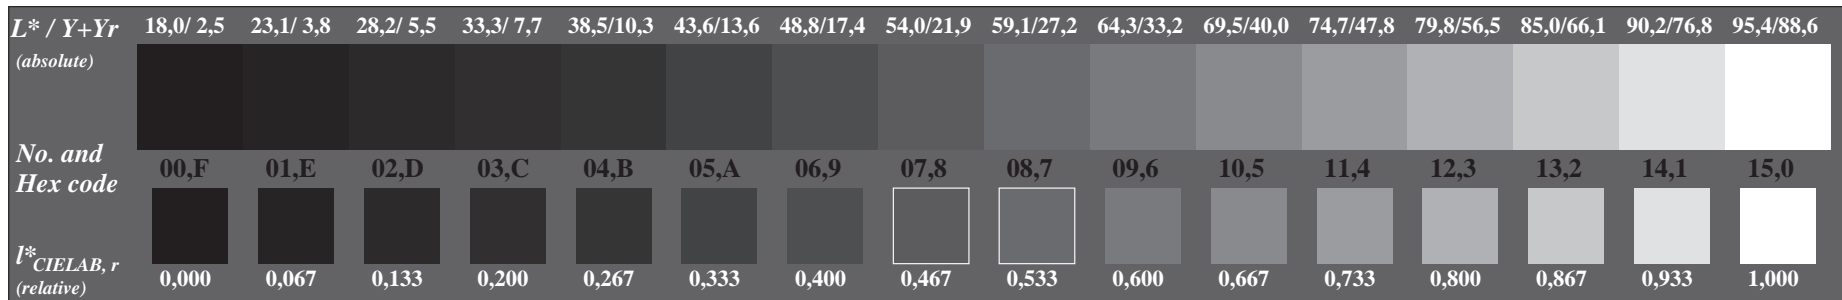

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $www^*$  setrgbcolor

Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators  
 DIS ISO/IEC 19839-X; output:  $cmy0^* / 000n^*$  setcmykcolor

See for similar files: <http://www.ps.bam.de/DE81/DE81.HTM>  
 Information and Order: <http://www.ps.bam.de>

Version 2.0, io=m,0; iORS; oORS, CIE\text{LAB}

BAM registration: 20030101-DE81/10S/S81E00FP.PS/.PDF  
 application for monitors and printers

BAM material: code=tha4ta