




Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $w_w^* \text{ setrgbcolor}$

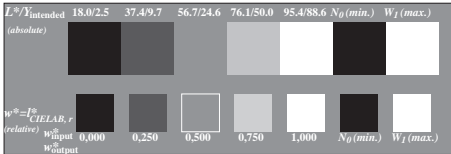


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $w_w^* \text{ setrgbcolor}$

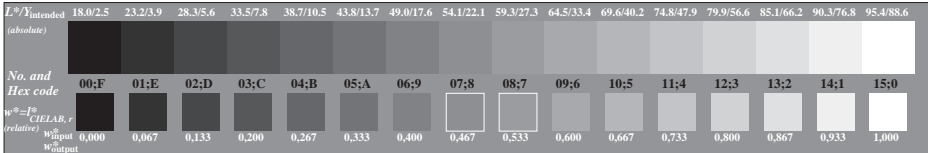


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $w_w^* \text{ setrgbcolor}$

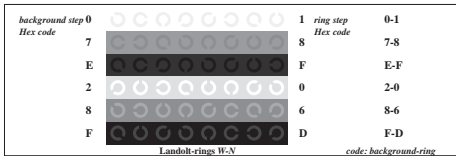

Picture C4: Landolt-rings W-N; PS operator: $w_w^* \text{ setrgbcolor}$

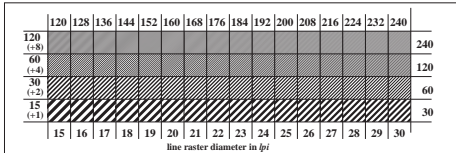

Picture C5: Line raster under 45° (or 135°); PS operator: $w_w^* \text{ setrgbcolor}$

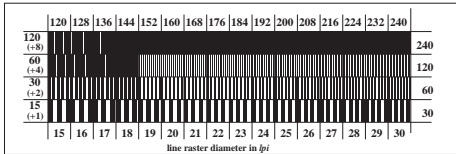

Picture C6: Line raster under 90° (or 0°); Use of the PS operator $w_w^* \text{ setrgbcolor}$

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and DIS ISO/IEC 19839-X;

input: $w_w^* \text{ lin } 1.0 \text{ exp setrgbcolor}$
 output: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$

